


# LED HIGH BAY LIGHT 60W/80W/120W/160W

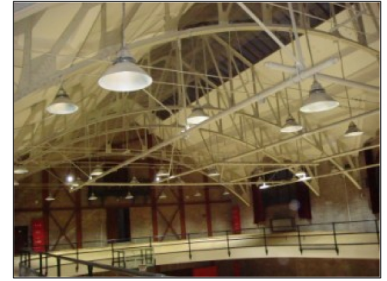


## LED HIGH BAY LIGHT

Product Name	HIGH BAY LIGHT		HIGH BAY LIGHT		HIGH BAY LIGHT		HIGH BAY LIGHT	
Item No.	NKU-64/4-060/2-FA		NKU-64/4-080/2-FA		NKU-20/25-120/4-FB		NKU-20/25-160/4-FB	
Input Power	60W		80W		120W		160W	
Luminous Flux	5280 LM		7040 LM		10560 LM		14080 LM	
Luminous Efficiency	88 LM/W		88 LM/W		88 LM/W		88 LM/W	
Input Voltage	90 VAC ~ 260VAC/277 VAC/347VAC		90 VAC ~ 260VAC/277 VAC/347VAC		90 VAC ~ 260VAC/277 VAC/347VAC		90 VAC ~ 260VAC/277 VAC/347VAC	
Current	150 mA/200 mA		150 mA/200 mA		300 mA/400 Ma		300 mA/400 mA	
Frequency	50 Hz / 60 Hz		50 Hz / 60 Hz		50 Hz / 60 Hz		50 Hz / 60 Hz	
AC Power Factor	AC 99%		AC 99%		AC 99%		AC 99%	
DC Power Efficiency	AC 94%		AC 94%		AC 94%		AC 94%	
Beam Angle	73°(50%)		73°(50%)		73°(50%)		73°(50%)	
Color Temperature	2700K - 6500K		2700K - 6500K		2700K - 6500K		2700K - 6500K	
Color Rendering Index	Ra>80		Ra>80		Ra>80		Ra>80	
Working Temperature	-40°C ~ +50°C		-40°C ~ +50°C		-40°C ~ +50°C		-40°C ~ +50°C	
Housing&Lampshade	Aluminium Alloy		Aluminium Alloy		Aluminium Alloy		Aluminium Alloy	
IP Rating	IP20	IP55	IP20	IP55	IP20	IP55	IP20	IP55
Outline Size	ø380*359(mm)[Hook] ø380*315(mm)[Sucker]		ø380*359(mm)[Hook] ø380*315(mm)[Sucker]		ø500*442(mm)[Hook] ø500*400(mm)[Sucker]		ø500*442(mm)[Hook] ø500*400(mm)[Sucker]	
Package Size	430*430*330(mm)		430*430*330(mm)		560*560*440(mm)		560*560*440(mm)	
Gross/Net Weight	3.11kg/1.1kg		3.11kg/1.1kg		6.5kg/2.9kg		6.5kg/2.9kg	
Installation Method	Hook with a stick Sucker with a stick		Hook with a stick Sucker with a stick		Hook with a stick Sucker with a stick		Hook with a stick Sucker with a stick	
Dimension								
Application	Factory line, warehouse, cold store, highway toll stations, gas stations, supermarkets, exhibition halls, stadiums etc.							

## Products features

- High voltage, low current, energy-saving, environment friendly, healthy and saving money;
- Use aluminium alloy material, easy to transport, have uniform light and high effective reflection;
- With PC material, glittering and translucent, easy to transport;
- It's available to hang it up with hook or hanging plate, as well as add pole between the lamp holder and hanging plate(or hook) per requests.

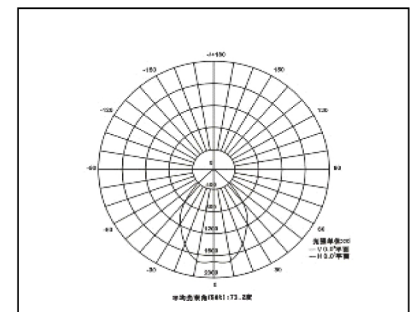

Light Distribution Curve



[www.lumenco.ca](http://www.lumenco.ca)



[info@lumenco.ca](mailto:info@lumenco.ca)



819-692-2245

