



# DUAL CEILING OR WALL MOUNT

B-1-O  
11/13

QUESTIONS OR CONCERNS CONTACT CANARM AT:  
1-800-265-1833 (English)  
1-800-567-2513 (French)  
Monday through Friday 8:00 AM to 5:00 PM E.S.T.

## TOOLS AND MATERIALS REQUIRED:



Pliers



Wire Cutters



Blade  
Screwdriver



Phillips  
Screwdriver

Wiring supplies  
as required by  
electrical code

"INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS"  
"READ ALL INSTRUCTIONS"




**"IMPORTANT SAFETY INSTRUCTIONS"**

**"SAVE THESE INSTRUCTIONS"**


## SAFETY PRECAUTIONS:

1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
  2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
  3. CONNECT THE GROUND WIRE (BARE COPPER OR GREEN) FROM YOUR FIXTURE TO THE GROUND WIRE (BARE COPPER OR GREEN) OR GROUND SCREW IN THE ELECTRICAL OUTLET BOX OR CONNECT THE GROUND WIRE FROM THE ELECTRICAL OUTLET BOX TO THE GROUND SCREW ON THE OUTLET BOX COVER OF THE FIXTURE.
- NOTE: Product May Not Look Exactly As Shown In Diagrams. Bulbs Are Not Included.**


## INSTALLATION:

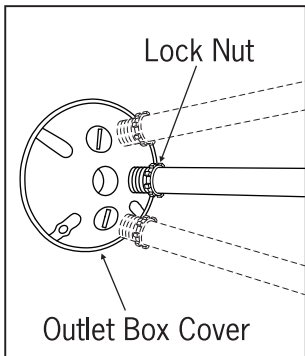

**1.** This fixture can be mounted in either ceiling or wall. Decide the way to unscrew the big screw. Select the angle of the fixture to be mounted to the outlet box cover when wall mounted is selected. Make sure to close the hole by re-tighten the big screw after selection.




**2.** Insert the black and white wires from the top of the reflector through the pipe. Screw the pipe into the top of the reflector. Screw the outlet box cover to the end of the pipe.

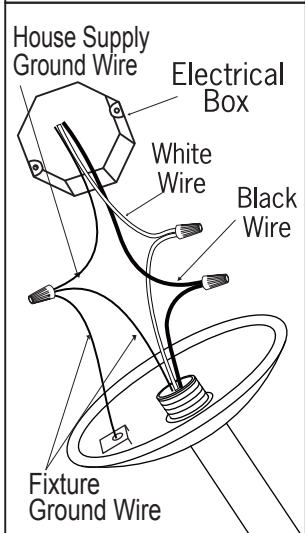


**3.** Connect the ground wires (bare copper or green) from your fixture to the ground wire (bare copper or green) or ground screw in the electrical outlet box. Connect black wire from fixture to black wire in outlet box and connect the white wire from fixture to white wire in outlet box.

**WARNING: SUITABLE FOR WET LOCATIONS WHEN THREADS ARE SEALED WITH TEFLON TAPE OR PIPE SEAL.**

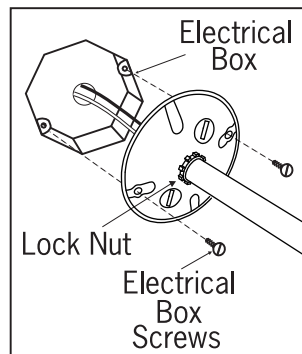**4.** Align the luminaire cover plate. Tighten the 2 lock nuts once the luminaire has been positioned correctly. Tighten the outlet box cover to the electrical box using the electrical box screws.

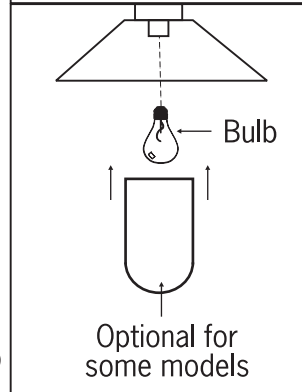

**5.** Install specified bulb (sold separately).

**6.** For Model BL14CWS-O only, unscrew glass cylinder to install bulb. Screw glass cylinder back on to the fixture.



**7.** After Installation, seal around the top and side perimeter between the fixture and the wall surface with weather resistant caulking. The bottom should be left un-caulked to prevent moisture build-up. Apply a small amount of weather resistant caulking around the side perimeter between the cap nut and mounting plate.