

QUESTIONS OR CONCERNS CONTACT CANARM AT:  
1-800-265-1833 (English) 1-800-567-2513 (French)  
Monday through Friday 8:00 AM to 5:00 PM E.S.T.

TOOLS AND MATERIALS REQUIRED:



Phillips Screwdriver



Wire Cutters

Wiring supplies as required by electrical code



Pliers



Wrench

"INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS"  
"READ ALL INSTRUCTIONS"

## "IMPORTANT SAFETY INSTRUCTIONS"


### "SAVE THESE INSTRUCTIONS"

### SAFETY PRECAUTIONS:

1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
3. CONNECT THE GROUND WIRE (BARE COPPER OR GREEN) FROM YOUR FIXTURE TO THE GROUND WIRE (BARE COPPER OR GREEN) OR GROUND SCREW IN THE ELECTRICAL OUTLET BOX.
4. CLEAN GLASS WITH WATER ONLY.

**NOTE: Product May Not Look Exactly As Shown In Figures.**

### INSTALLATION:

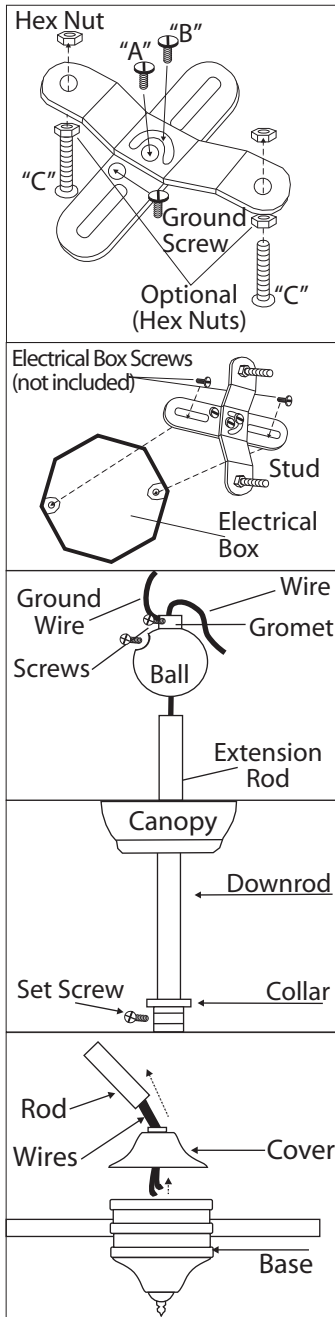

**1.** Assemble the mounting bracket (2 pieces) as per drawing. "A" and "B" screws should only be snug at this point. Screw "C" may be tightened and locked in place with hex nut(s) (if mounting bracket holes are untapped, an additional two hex nuts are required). The ground screw should then be attached to the mounting bracket (do not tighten).


**Note:** If your fixture requires a longer drop, follow steps 2- 3 for assembling the extra downrod.

**2.** Remove ground wire and screw. Remove screw holding ball. Remove ball and gromet.

**3.** After ball is removed, thread wires through extension rods. Reinstall the ball and secure screw to hold ball in place. Install ground wire and screw. Install gromet.

**4.** Determine your downrod length. Lock in place by tightening the collar and set screw.  
**Note:** If your fixture has an "uplight" or "downlight" option, follow the following steps to convert from one mounting option to another. Before continuing, decide whether your fixture will be mounted in an "uplight" or "downlight" position.

**5.** To convert mounting positions, unscrew rod and lift off cover from the base.

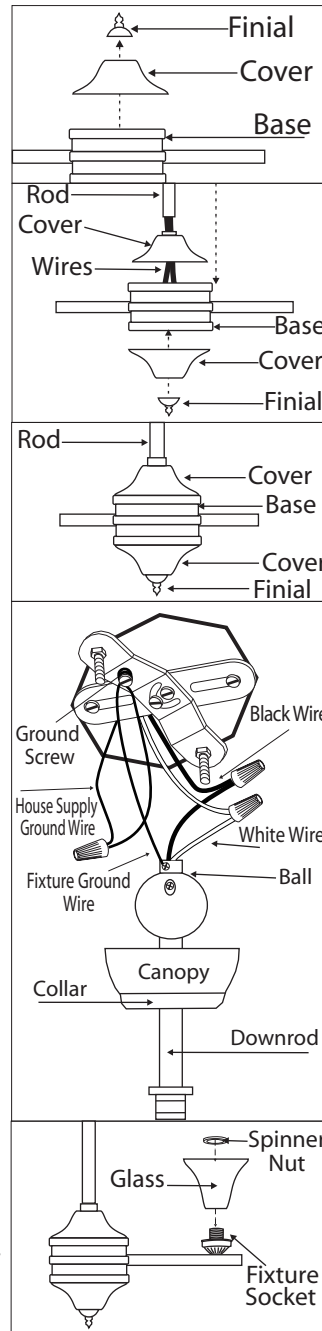

**6.** Unplug wires and flip over light fixture.

**7.** Remove finial and cover from base. Thread connectors into the base and connect wires.

**8.** Reinstall cover. Thread rod onto base. Install cover and finial on bottom of the base.

**9.** Firmly attach the fixture ground wire (bare copper) to the mounting bracket with the ground screw (by wrapping around the ground screw) and then connect it to the house supply ground wire with a wire nut. Connect the black wire (or wire marked "SPT-1") from the fixture to the black wire in the electrical box and connect the white wire from the fixture to the white wire in the electrical box.

**10.** Install glass to the fixture with spinner nut.

**11.** Install proper bulb type and wattage.