

DISC HIGH BAY INSTALLATION




WARNING


PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

- To prevent personal injury or product damage only licensed electricians should install.
- To avoid electric shock or component damage disconnect power before attempting installation or servicing.
- This product must be installed in accordance with the national electric code (NEC) and all applicable federal, state and local electric codes and safety standards.
- Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction.
- To prevent product malfunction and/or electrical shock this product must be properly grounded and ventilated.
- This luminaire is designed to operate in ambient temperatures ranging from -20°C to 55°C
- Keep at least 20cm between the luminaire and any possibly flammable material.


SUSPENDED

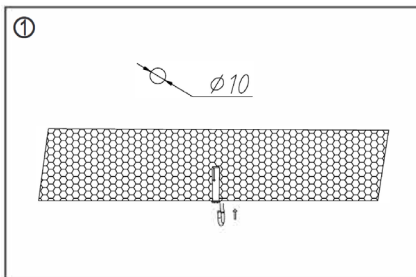


Drill a hole of 10mm diameter where you will install the luminaire. Screw the hook into the hole.

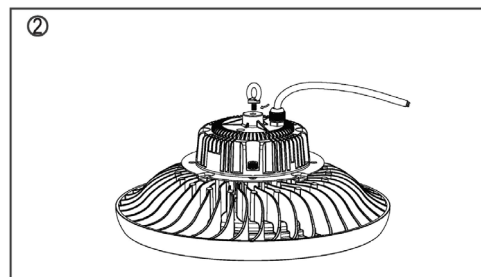

Screw the hook accessory into the top of the luminaire.

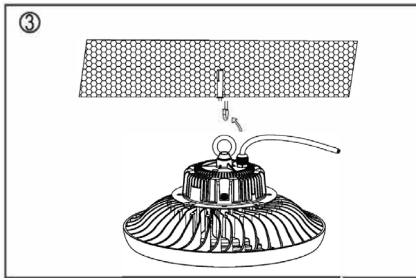


Hang the luminaire directly to the hook or onto a rope then the hook.

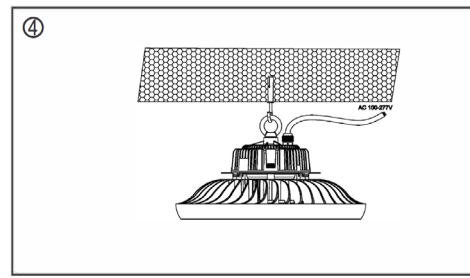


L - Brown N - Neutral PE - Green-Yellow


SURFACE-MOUNTED

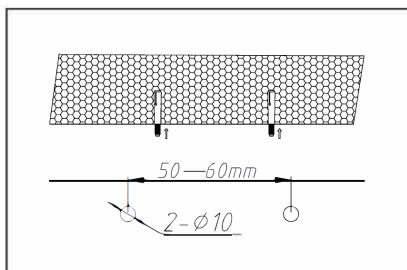


Create 2 10mm holes in the ceiling as required in your installation between 50 - 60mm apart.

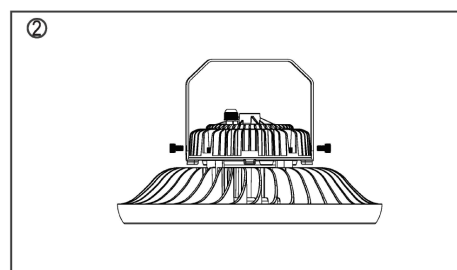

Screw the bracket onto the luminaire.

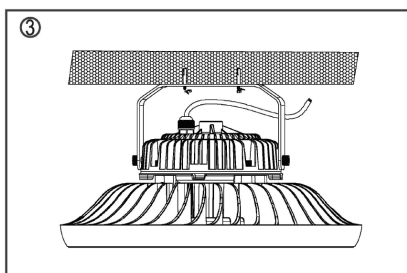

Screw the luminaire securely to the ceiling.

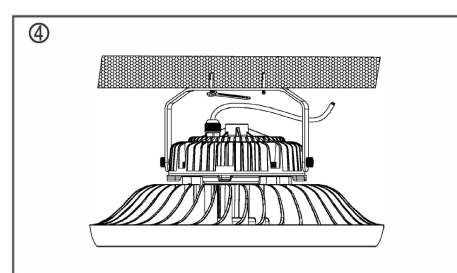

L - Brown N - Neutral PE - Green-Yellow




ATTENTION


VEUILLEZ LIRE AVANT L'INSTALLATION

- Seul un électricien agréé peut installer cette luminaire.
- Coupez l'alimentation électrique avant tout entretien.
- L'installation doit être conforme aux normes nationaux, locaux de construction et de sécurité.— Toute modification de ce luminaire est interdite.
- Ce produit doit être relié à la terre.
- Ce luminaire est conçu pour fonctionner dans les températures de -40°C to 45°C
- Il doit y avoir une distance de sécurité d'au moins 20mm entre le luminaire et tout objet inflammable


SUSPENDU

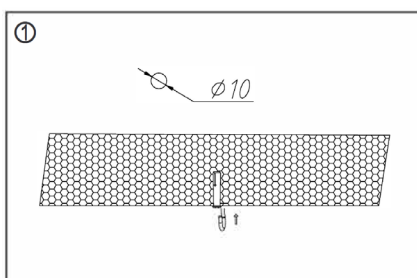


Percez un trou de 10mm à l'emplacement de l'installation. Serrez le crochet dans le trou.

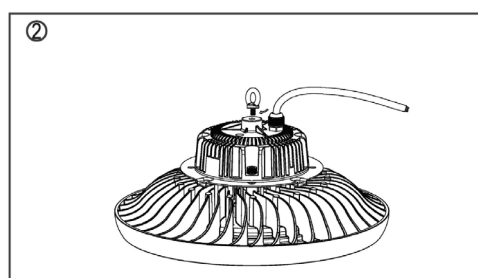

Serrez l'accessoire crochet sur le haut du luminaire.

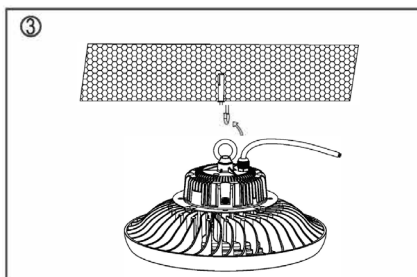


Suspendez le luminaire à le crochet directement ou par une corde.

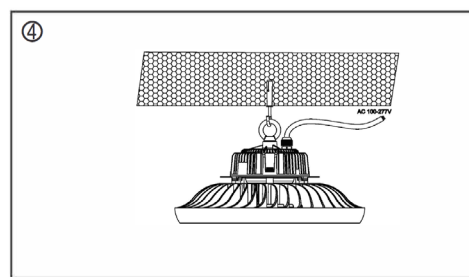


L - Brun N - Neutre PE - Vert-Jaune


MONTAGE EN SURFACE

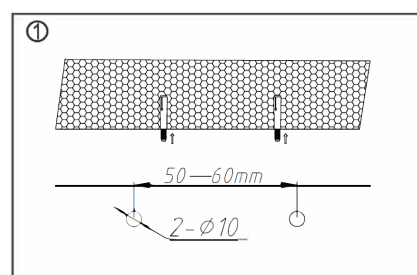


Percez 2 trous de 10mm dans la plafond au besoin, séparés 50 - 60mm.

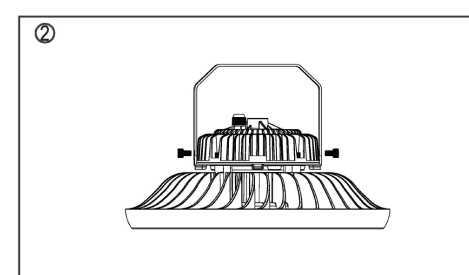

Serrez l'étrier sur le luminaire.

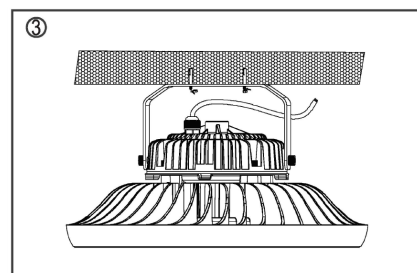

Fixez le luminaire sur la plafond avec les vis.

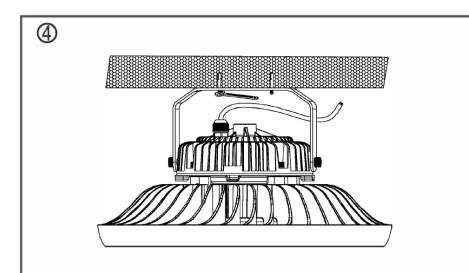

L - Brun N - Neutre PE - Vert-Jaune