



# VR22-MU-xxx-8yy-xxxxA

## 22" UNIVERSAL INPUT LINEAR LED RETROFIT KITS

- Suitable for 2' x 2' luminaires
- Suitable for use in retrofit rebate programs
- Kitted for ease of installation with provided harness
- Universal Voltage with 0-10V dimming
- Optional lens to diffuse light
- L70= >60,000hrs / L90= >40,000hrs
- High performance efficacy up to 156lm/W
- cULus Classified
- Class 2 Lighting System
- Applications: Airports, Offices, Schools, Residential Buildings, Stadiums, etc.

### General Specifications

Input Voltage ①	120~277V (+/- 10%)
Input Current ①	Please see page #2 for specific setup
Input Power ①	Please see page #2 for specific setup
Input PF	>0.9
THD	<20%
Dimming Type/Range	0-10V /100% ~ 10%
Beam Angle	120°
CRI	80CRI
Storage Temperature Range	-40°C to 100°C / -40°F to 212°F
Operating Temperature Range (Ta)	-40°C to 58°C / -40°F to 136.4°F
Maximum Driver Case Temperature (Tc)	T1M1UNV0350-15L Max: 90°C / 194°F T1M1UNV0700-30L Max: 86°C / 186.8°F T1M1UNV105P-40E Max: 88°C / 190.4°F
Maximum Module Case Temperature	L70: Tc max 105°C (Ts=110°C) / L90: Tc max 105°C (Ts=110°C)
Estimated Lumen Maintenance ②	L70: >60,000Hrs / L90: 40,000Hrs
Color Consistency	Binning per ANSI C78.377-2015 @ 25°C; 3 SDCM
Overall Size of Modules	22" L x 1.73" W x 0.39" H (560mm x 44mm x 10mm)
Overall Size of Drivers	T1M1UNV0350-15L 3.94" L x 1.18" W x 0.91" H (100mm x 30mm x 23mm) T1M1UNV0700-30L 4.65" L x 1.18" W x 1.16" H (118mm x 30mm x 29.5mm) T1M1UNV105P-40E 10.83" L x 1.22" W x 0.98" H (275mm x 31mm x 25mm)
Packaging	Components individually packaged
Magnets Qty. / Magnetic Force	2 / 2N (.45lbf) per magnet
Thermal Feedback	Not Available
Safety/Compliance	cURus (File # E365124) Retrofit Kit: cULus (File # E486779) DLC 4.3: Linear LED Retrofit (Standard and Premium) Please reference DLC QPL <a href="https://www.designlights.org/search/?search=fulham">https://www.designlights.org/search/?search=fulham</a>
	Suitable for UL Class 2 Lighting Systems
	RoHS Compliant
	Dry and Damp Location
	CE Module (IEC 62031: 2008, AMD1: 2012, AMD2: 2014)
	CE Drivers: T1M1UNV0350-15L T1M1UNV0700-30L T1M1UNV105P-40E
	SELV ( Drivers:T1M1UNV0350-15L / T1M1UNV0700-30L )
RFI/EMI	FCC Part 15B Consumer, EN55015
Input Surge Test	References driver specification
Sound Rating	A
Service Life	50,000hrs @ Max. Tc of module and driver
Energy Efficiency Label (EEI-Label)	A++
Warranty	5 years @ Max. Tc from the date of manufacture

① Measured electrical data per UL file

② TM-21 Reported Numbers



VR22-MU-xxx-8yy-xxxxA

Part Number Matrix

**V R 22 M U x xx 8 yy xxxxA**

Product Line	Type	Module Length	Dimming	Input Voltage	# of Modules	Max. Module Rated Power	CRI	Color Temperature	Driver Output Current	Options
V = Vizion	R = Retrofit Kit (cULus Classified)	22 = 22"	M = 0-10V	UNV = 120~277VAC	1 2	50 = 50W	Ⓢ8 = 80	27 = 2700K Ⓢ30 = 3000K Ⓢ35 = 3500K Ⓢ40 = 4000K Ⓢ50 = 5000K 57 = 5700K 65 = 6500K	0350 = 350mA 0700 = 700mA 1050 = 1050mA	A = Standard Option

Electrical and Optical Specifications

LED Retrofit VR Number	LED Module Part Number	Number of Modules	Drive Current per Module	LED Driver Part Number	Number of Drivers	Input Voltage (V)	Input Current 120/277V (A)	Total System Power (W)	Driver Efficiency @ 277V (%)	Total System Lumens (lm)	Total System Efficacy (lm/W)	Wiring Diagram*
VR22-MU-150-840-0350A	TMU125050CL840A	1	350 mA	T1M1UNV0350-15L	1	120~277VAC	0.117/0.052	13.7	84%	2245	164	1P
VR22-MU-250-840-0350A	TMU125050CL840A	2	175 mA	T1M1UNV0350-15L	1	120~277VAC	0.114/0.051	13.3	84%	2266	170	2P
VR22-MU-250-840-0700A	TMU125050CL840A	2	350 mA	T1M1UNV0700-30L	1	120~277VAC	0.229/0.103	27.1	85%	4490	166	2P
VR22-MU-250-840-1050A	TMU125050CL840A	2	525 mA	T1M1UNV105P-40E	1	120~277VAC	0.347/0.157	41.4	85%	6634	160	2P

Luminous Flux De-Rating: CCT and CRI Multipliers

	2700K	3000K	3500K	4000K	5000K	5700K	6500K
CRI 80(R9>0)	0.92	0.95	0.97	1.00	1.01	1.01	1.00
CRI 90(R9>50)	0.77	0.84	0.83	0.85	0.86	0.86	0.85

NOTES:

- Performance based on Tc mod = 25°C. See thermal de-rating chart (pg. 3) for higher temperature operation
- Standard lumen output and efficacy is calculated for standard options. Reference CCT & CRI vs Luminous Flux chart for lumen ratio calculation.
- Specifications are subject to change without notice.
- The LED DC Module can be configure with different LED chip quantities, series and parallel design configurations to meet a specific design requirement. Contact Fulham for further assistance.
- 70CRI is NOT available
- Driver Efficiency @277V

\* See page #7 for Wiring Diagram

Ⓢ Standard Product offering (All other options are made to order with MOQ and lead time)



# VR22-MU-xxx-8yy-xxxxA

## Thermal Specifications

	LinearHO Retrofi Kit
Storage Temperature Range	-40 to +100°C / -40 to +212°F
Operating Temperature Range (Ta)	-40 to 58°C / -40 to 136.4°F
Maximum Driver Case Temperature (Tc)	T1M1UNV0350-15L Max: 90°C / 194°F
	T1M1UNV0700-30L Max: 86°C / 186.8°F
	T1M1UNV105P-40E Max: 88°C / 190.4°F
Maximum Module Case Temperature	L70: Tc max 105°C (Ts=110°C) / L90: Tc max 105°C (Ts=110°C)



## Thermal De-Rating: Tc vs. Forward Voltage vs. Luminous Flux

Module Case Temperature (Tc)	Total Vf Multiplier	Luminous Flux Multiplier
25°C	1.000	1.000
30°C	1.000	0.991
35°C	0.997	0.982
40°C	0.993	0.973
45°C	0.993	0.964
50°C	0.990	0.953
55°C	0.987	0.944
60°C	0.987	0.935
65°C	0.984	0.926
70°C	0.984	0.917
75°C	0.980	0.908
80°C	0.977	0.899
85°C	0.977	0.889
90°C	0.974	0.880
95°C	0.970	0.862
100°C	0.967	0.853



# VR22-MU-xxx-8yy-xxxxA



## Certification Chart

VR22-MU-150-840-0700L  
VR22-MU-250-840-0700L


Classification	Model	VR22-MU-xxx-8yy-xxxxA
<b>RoHS COMPLIANT</b>		YES
<b>cRU US</b>		YES
<b>DLC QPL LISTED PREMIUM</b>		VR22-MU-150-850-0350A VR22-MU-250-850-0350A VR22-MU-150-840-0700A VR22-MU-250-830-0700A VR22-MU-250-840-0700A VR22-MU-250-850-0700A VR22-MU-250-830-1050A VR22-MU-250-840-1050A VR22-MU-250-850-1050A
<b>CE</b>	Drivers:	T1M1UNV0350-15L T1M1UNV0700-30L T1M1UNV105P-40E Module: TMU125050CL8xxA
<b>Energy Efficiency Label (EEL-Label)</b>		A++
<b>Suitable for UL Class 2 Lighting System</b>		YES

## Energy Star™ TM-21 Calculator Data

Tc Module	Reported L70	Reported L90
55°C	>60,000 Hrs	>54,000 Hrs
85°C	>60,000 Hrs	46,000 Hrs
105°C	>60,000 Hrs	40,000 Hrs
Tc Module	Calculated L70	Calculated L90
55°C	180,000 Hrs	54,000 Hrs
85°C	154,000 Hrs	46,000 Hrs
105°C	133,000 Hrs	40,000 Hrs

## Product Image: 22" Universal Input LED Troffer Retrofit Kits


### VR22-MU-xxx-8yy-xxxxA

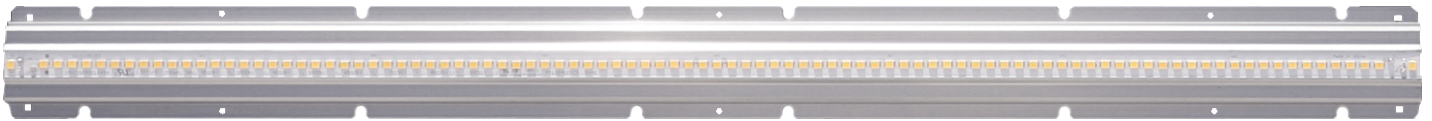

### TOP VIEW



(Varies per Driver model)



**WARNING:** Risk of fire and electrical shock. Luminaire wiring and electrical parts may be damaged when drilling for installation of LED retrofit kit. Check for enclosed wiring and components.

**Avertissement:** Risque d'incendie et d'électrocution, câblage des luminaires et pièces électriques peuvent être endommagés lors du forage pour l'installation du kit de conversion à DEL. Vérifier le câblage et les composants ci-joint.

## Hardware Kit: TLC-HW14

**LinearHO UNV Retrofit Kit includes:**  
LED Module, LED Driver, Hardware, Harness, Labels & Installation Instructions

Components individually packaged


1) For specific models please visit: <https://www.designlights.org/search/?search=fulham>



# VR22-MU-xxx-8yy-xxxxA


## Mechanical Drawings (Module)

**22"**  
[560mm]

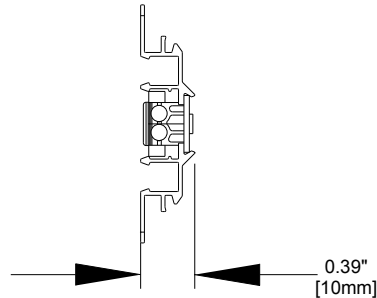


**SIDE VIEW**

Overall Dimensions	
Length	22" [560mm]
Width	1.73" [44mm]
Height	0.39" [10mm]


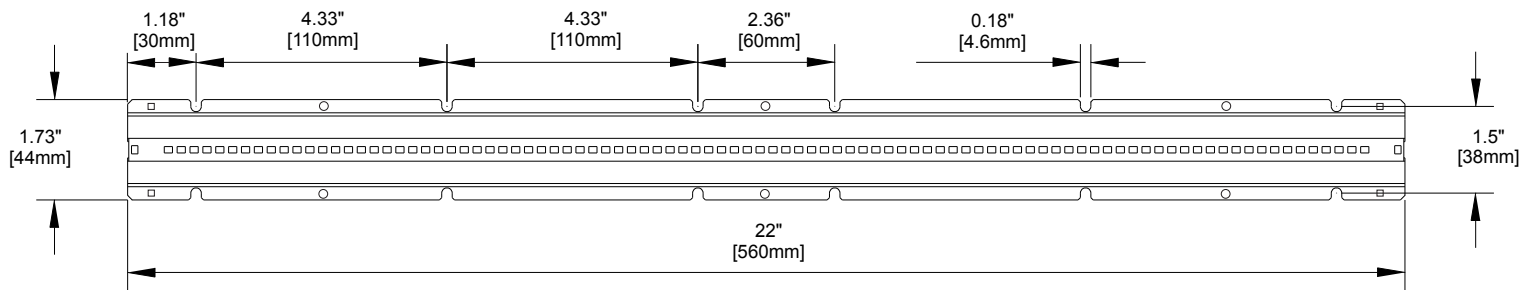


**TOP VIEW**

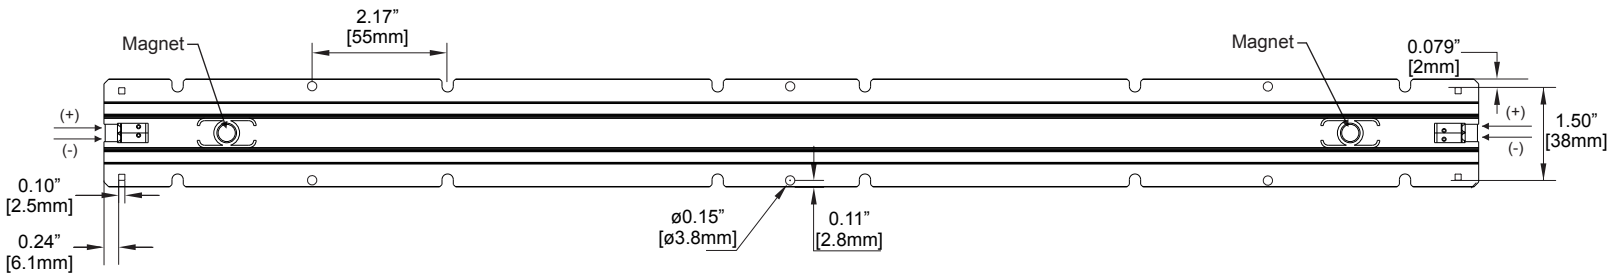



**BOTTOM VIEW**

## Mechanical Drawings (Harness)

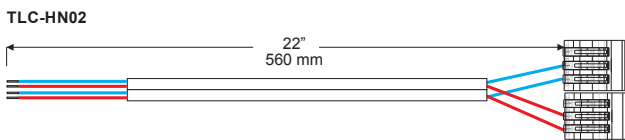

**ISOMETRIC VIEW**

Overall Dimensions	
Length (wire)	22" [560mm]
Depth (connector)	0.73" [18.6mm]
Width (connector)	0.74" [18.7mm]
Height (connector)	0.33" [8.3mm]

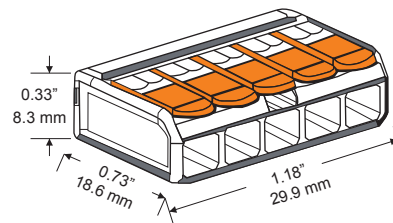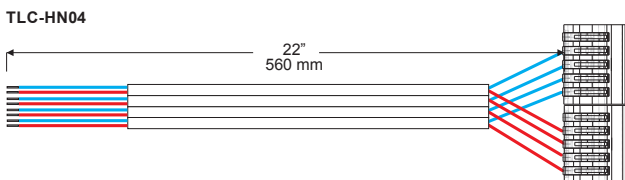

**ISOMETRIC VIEW**



Overall Dimensions	
Length (wire)	22" [560mm]
Depth (connector)	0.73" [18.6mm]
Width (connector)	1.18" [29.9mm]
Height (connector)	0.33" [8.3mm]



# VR22-MU-xxx-8yy-xxxxA



## Mechanical Drawings (Drivers)

### T1M1UNV0350-15L

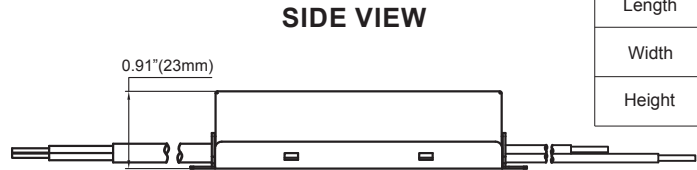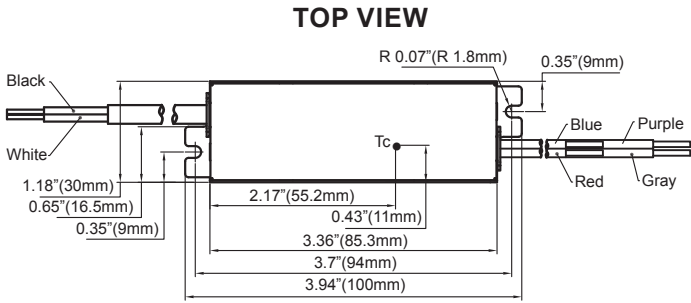



Overall Dimensions	
Length	3.94" [100mm]
Width	1.18" [30mm]
Height	0.91" [23mm]

### T1M1UNV0700-30L

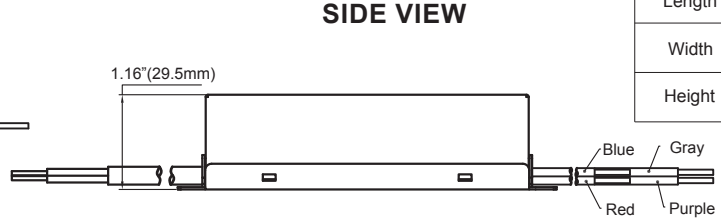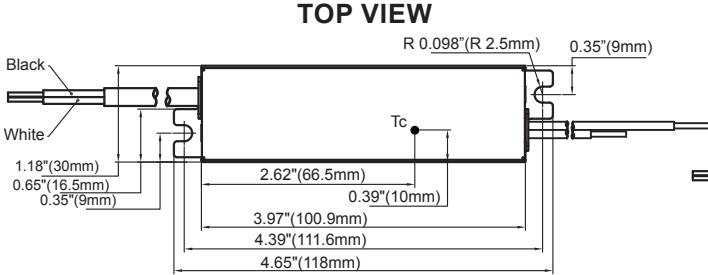

Overall Dimensions	
Length	4.65" [118mm]
Width	1.18" [30mm]
Height	1.16" [29.5mm]

### T1M1UNV105P-40E

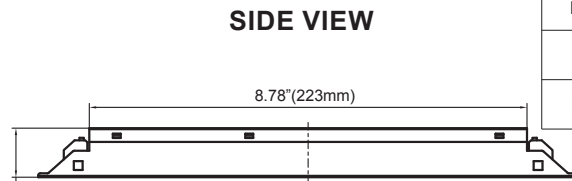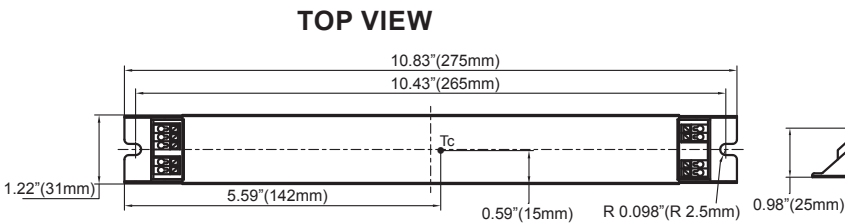

Overall Dimensions	
Length	10.83" [275mm]
Width	1.22" [313mm]
Height	0.98" [25mm]




# VR22-MU-xxx-8yy-xxxxA


## Wiring Diagram

1. Connect the driver positive wire (Red +) to the harness positive wires (Red +)
2. Connect the driver negative wire (Blue -) to the harness negative wires (Blue -)
3. Connect the harness positive wires (Red +) to the module(s) positive connector (+)
4. Connect the harness negative wires (Blue -) to the module(s) negative connector (-)

### One Module Wiring (1P)

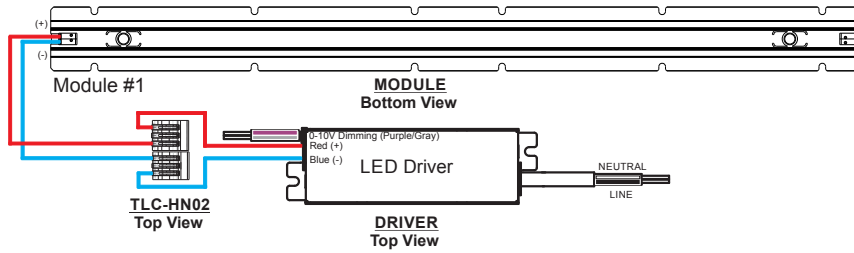

### Two Module Wiring (2P)

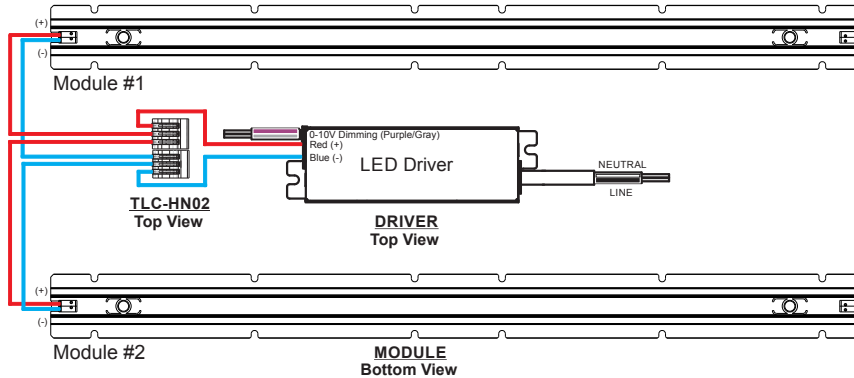




# VR22-MU-xxx-8yy-xxxxA

**Accessories** (Not included with kit)


## 22" Diffuser Lens

Fulham Part Number: **22"**: **TLE-OPT-120-004**

- White polycarbonate diffuser lens - 82% transmissivity at nominally rated currents.

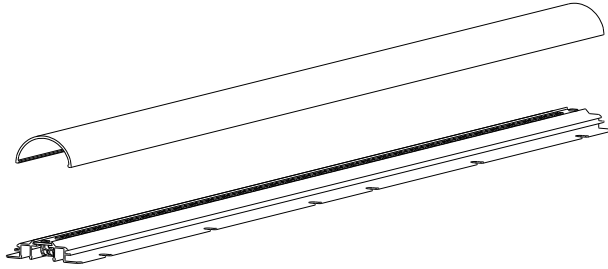

**ISOMETRIC VIEW**

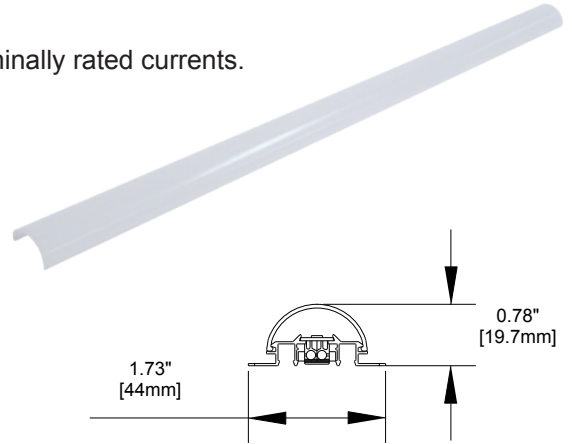

**SIDE VIEW**


**Installation Steps when using clamps:**

1. Place the LED Module on the luminaire surface.
2. Place the Diffuser lens on top of LED module (line it up with LED module mounting edges).
3. Push down to snap into place.


## End Caps

Fulham Part Number: **TLE-OPT-120-020**

- White Polybutylene Terephthalate (PBT) end caps

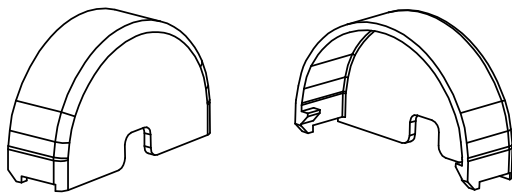


**ISOMETRIC VIEW**

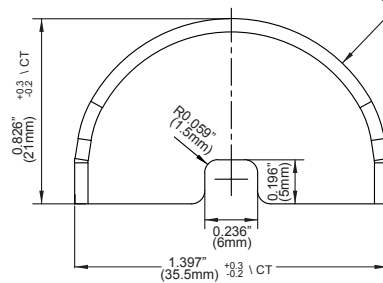

**SIDE VIEW**

## Interconnects

- Interconnect Type: WAGO Double pins to interconnect Modules (#2060-952)
- Approvals: cURus, UL 1977, and RoHS Compliant



**Bottom View**



**NOTES:**

- 1) Interconnects are NOT sold by Fulham.
- 2) For more detail information, please visit Wago's website: <http://www.wago.com/infomaterial/pdf/60291132.pdf>





## Luminaire Compatibility

LED Retrofit VR Number	Compatible Luminaire Type	Troffer Recessed Luminaire (2x2)	Vapor Tight Luminaire (1x2)	Number of LED Modules	Number of LED Drivers	Input Voltage (VDC)	Input Current (A)		Total System Power (W)	Driver Efficiency (%)	Total System Lumens (lm)	Total System Efficacy (lm/W)
							120V	277V				
VR22-MU-150-8yy-0350A		✓	✓	1	1	120-277	0.117	0.052	13.7	84	2245	164
VR22-MU-250-8yy-0350A		✓	✓	2	1	120-277	0.114	0.051	13.3	84	2266	170
VR22-MU-250-8yy-0700A		✓	✓	2	1	120-277	0.229	0.103	27.1	85	4490	166
VR22-MU-250-8yy-1050A		✓	✓	2	1	120-277	0.347	0.157	41.4	85	6634	160



Troffer Luminaire



Vapor Tight Luminaire


### NOTES:

- 1) Checkmark (✓) = cULus Classified Application
- 2) For specific models please visit: <https://www.designlights.org/search/?search=fulham>
- 3) All electrical and lumen calculations based at 277V




# VR22-MU-xxx-8yy-xxxxA

## Color and Binning

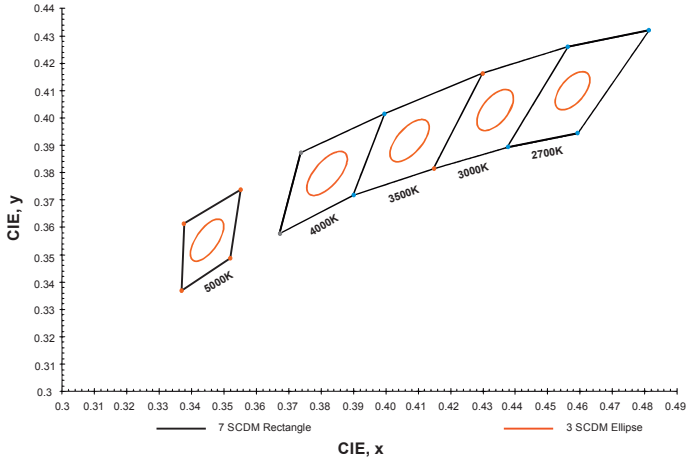

## Optical Spectrum

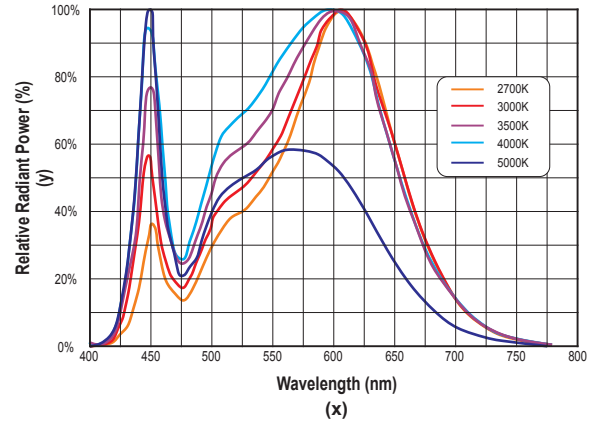


### NOTES:

- 1) The Color and Binning and Optical Spectrum charts are for reference only. For more detailed info, contact factory.
- 2) Reference Samsung Chromaticity Diagram for Color and Binning. Binning per ANSI C78.377-2015 @ 25°C; 3 SDCM.
- 3) The Optical Spectrum values vary depending on product type and color rank.
- 4) Driver not included.




**Packaging**

Components individually packaged

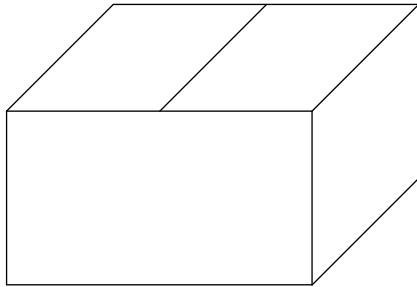


**LED HARNESS**

TLC-HN02  
TLC-HN04

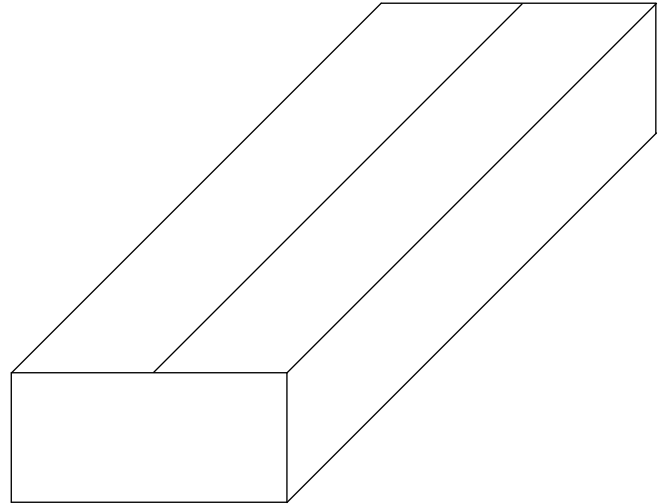


**LED LINEARHO  
MODULE**

TMU125050CL8yyA

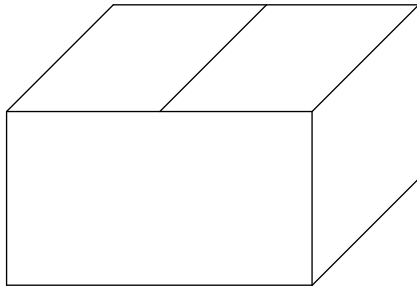


**LABELS**

LABEL #1  
LABEL #2

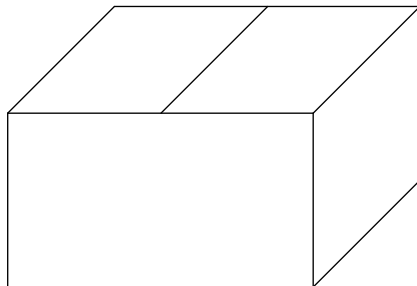

**HARDWARE**

HHILPF00049

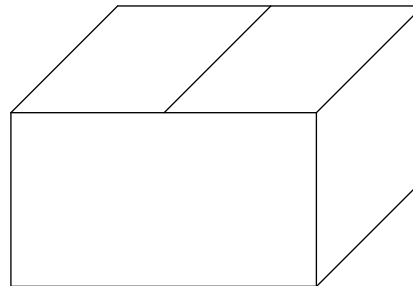

**LED DRIVER**

T1M1UNV0350-15L  
T1M1UNV0700-30L  
T1M1UNV105P-40E




# VR22-MU-xxx-8yy-xxxxA

## Guidelines

(Reference instruction sheets for detail installation of VR kit)


## Termination Notes

- Connector Type: WAGO #744-392 (2 pin push wire connector)
  - AWG: 20...16 solid wire
  - Strip length: 8...9mm / 0.31...0.35in
  - Connector Max amp. rating: 6 Amps.

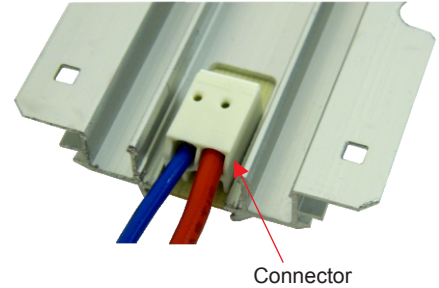

## Fastening Notes

- If fastening by screw hole, use any screw with diameter less than 0.185 in (4.7mm). Use all available screw holes to ensure good contact between back side of module and mounting surface. Refer to max specified torque for installation. Suggested screw sizes: #6 or M4 Pan Head screw.
- If fastening using double-sided tape, start with clean, oil-free and dust-free surface. Peel backing and place LED module on mounting surface. Firmly press down on the module to ensure good adherence. Follow the double-side tape manufacturer's installation instructions.
- BJB P2F (Push-to-Fix) fixing elements for PCBs can be used to fasten LED modules to mounting surface. Reference BJB's website for ordering information and specific model to use: <http://www.bjb.com/index.php?pid=376706&lid=10>.



## Environmental Rating / Conformal Coating

- The DC LinearHO Modules have been evaluated for use in dry or damp locations only. If used in wet locations, acceptability and the need for additional evaluation shall be determined in the end product.
- Fulham's LinearHO modules are available with conformal coating; made to order with MOQ and lead time will apply. The conformal coating is a silicone based material which is double sprayed on the module only (LEDs and PCB). Conformal coating is recommended for the following applications: near ocean where salt is present, constant moisture, refrigeration, continuously high humidity, or outdoor applications. An IP rating of IP64 or IP65 is achieved when the conformal coating is used, but other factors should be considered. Fulham still recommends the luminaire also meet an IP64/65 rating.

## Electrostatic Sensitive Product (ESD)

- Fulham LED products should be handled with proper measures to protect against any potential ESD damage.
- When servicing, personnel should be ground and direct contact with LED should be avoided.

## Thermal Management

- Proper thermal management should be employed to ensure life and reliability of product. Max Tc of module should not be exceeded.
- Use of thermal grease, paste, pad, or other material interface is highly recommended.

## Polarity Notes

- DC Modules are polarity sensitive.
- Ensure that "positive" from LED Driver is connected to "positive" of LED modules and that "negative" from LED Driver is connected to "negative" of LED modules.
- Polarities of modules are marked with "+" for positive and "-" for negative.