


Project	
Schedule	Date
Notes	

**DESCRIPTION**

naturaLED® Retrofit Strip Light is an energy-saving, cost-effective, and easy to install replacement. This fixture mounts onto virtually any existing fluorescent channel; replacing existing 4' / 8' fluorescent strips and industrial fixtures to LED.

This universal design can fit up to 5.25" of T8 or T12 wide strips. Designed with round frosted acrylic lens and steel housing, improves an architectural look for retrofit replacement. Our RSL is a permanent solution that is suitable for applications including retail, warehouse, storage, and much more.

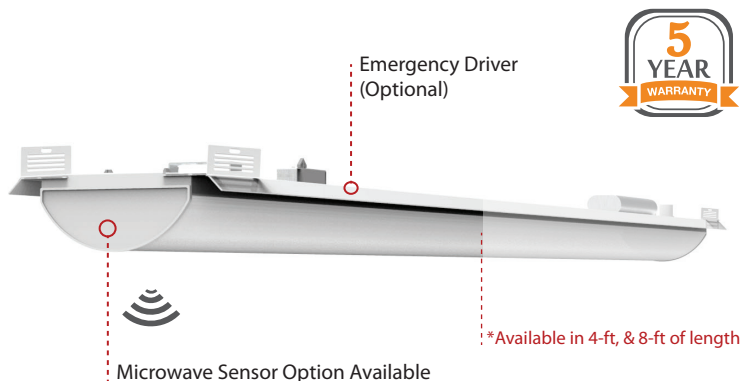

**FEATURES**

- DLC Premium
- Suitable for Damp Location
- Easy installation
- Contour, acrylic lens option provides glare diffusion
- Available in 4' or 8' length
- Input line voltage: 120-277V
- Input Current: 0.22A
- Power Factor: >0.9
- Dimmable: 0-10V
- Surge Protection Level: 4KV
- THD: <20
- CRI: 80
- Beam Angle: 110°
- Operating temperature: -22°F - 122°F

**ACCESSORIES**



**APPLICATIONS**

- Warehouse Lighting
- Retail Lighting
- Parking Garage
- Stairwells and Hallways
- Storage Lighting

**WARRANTY**

- 5 Year Warranty


Ordering Information		EXAMPLE: LED-FXRSL25/48FR/840/MV				
LED	FX	RSL	25	48FR	840	MV
LED	Category FX Fixture	Series RSL Retrofit Strip Light	Wattage 25 25W	Size/ Lens 48 48inch FR Frosted	CCT 840 4000K	Voltage MV 120-277V Multiple Voltage

ORDERING


\*P= Premium DLC / \*S = Standard DLC

Watts (W)	Ordering Code	Description	Color Temp (K)	Lumens (lm)	Equiv. Wattage (W)	Size	Rated Hrs	DAMP LOCATION	DLC (S/P)
25	9346	LED-FXRSL25/48FR/840/MV	4000K	3,932	2x32W T8	4 ft	50,000	•	P
25	9347	LED-FXRSL25/48FR/850/MV	5000K	3,967	2x32W T8	4 ft	50,000	•	P
56	9348	LED-FXRSL56/96FR/840/MV	4000K	8,404	5x32W T8	8 ft	50,000	•	P
56	9349	LED-FXRSL56/96FR/850/MV	5000K	8,466	5x32W T8	8 ft	50,000	•	P

SPECIFICATIONS

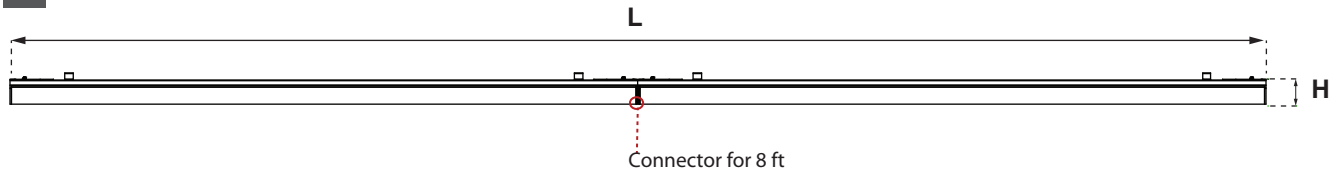

Size	Length (L)	Width (W)	Height(H)	Weight (lbs)
4 ft	48" (1219mm)	6.2"(158mm)	1.9" (48mm)	5.73
8 ft	96" (2438mm)	6.2"(158mm)	1.9" (48mm)	11.46



MOUNTING / ACCESSORIES

SOLD SEPARATELY

Emergency Driver

- 7334 BAEM15-48BC/MV-A (LED Emergency Backup Driver 120-277V)




Motion/Daylight Sensor

- P10234 SEN-MC605V-D (Built-In Motion Sensor MV605V D 120-277V)




Step Down Driver

- P10182 BA-10031A-240-22 (347-480V to 277V Step Down Driver)



PHOTOMETRICS CHART

FXRSL (4')- 25 Watt  
DLC Premium



Center Beam fc	Beam Width
2.5ft 180 fc	7.6 ft 10.9 ft
5.0ft 45.0 fc	15.2 ft 21.8 ft
7.5ft 72.0 fc	22.8 ft 32.7 ft
10.0ft 111.2 fc	30.4 ft 43.7 ft
12.5ft 144.0 fc	38.0 ft 54.6 ft
15.0ft 225.0 fc	45.6 ft 65.5 ft

■ Vert. Spread: 113.3°  
■ Horiz. Spread: 130.8°

PACKAGE

Master Pack: 1

