

Date:	
Prepared for:	

Comments:

Project: Type:



HYBRID SHOEBOX FLOOD LIGHT V4

IP66 | DIMMABLE







SPECIFICATIONS

3 Mounting Accessories (1 accessory included with every Shoebox) IP66 - Suitable for Wet Locations Robust Aluminium Casing Type V (5) Lighting Distribution Colour Rendering Index: >70 Functioning Temperature: -40°c to 50°c

AVAILABILITY

60W / 100W / 150W / 200W / 300W 4000K / 5000K 100-277VAC / 347V Wall-Mount (SH-WM-V4) Slip Fitter (SH-SL-V4) Bracket (SH-BR-V4)

*This icon indicates a STOCK item: Look for this Same Day Shipping icon below in 'Ordering Information' for products that ship out on the same day (orders must be placed before 3pm EST)

Full ies File Available on Request





22.9'

PRODUCT DETAILS

Photocell Compatible

Superior Engineering -Engineered to dissipate heat, this

automation

when installed. IP65 Water-Tight Seal A double-sided and waterproof

applications.

Optional photocell accessory

attractive and robust die-cast

Extremely Protected Driver

The high-performance driver

is accessible only from below,

shielding it from the elements

silicone seal ensures our shoebox flood light is suitable for all

alumnium body is equipped with cooling fins and industrial cooling

paste to maximize the fixture's life

allows further energy savings and

Hybrid Shoebox Flood Light (60W/100W) with Slip Fitter SH-60W-xxK-V4 + SH-SL-V4 SH-100W-xxK-V4 + SH-SL-V4 Wall-Mount & Bracket Available (See page 5 for all combinations)

Hybrid Shoebox Flood Light (150W/200W) with Slip Fitter SH-150W-xxK-V4 + SH-SL-V4 SH-200W-xxK-V4 + SH-SL-V4 Wall-Mount & Bracket Available (See page 5 for all combinations)

Hybrid Shoebox Flood Light (300W) with Slip Fitter SH-300W-xxK-V4 + SH-SL-V4 Wall-Mount & Bracket Available (See page 5 for all combinations)

(See page 5 for all combinations)

Optimal Performance High grade cooling paste reduces stress to the system for unrivaled performance

High Efficiency EMC3030 LEDs Providing up to 140lm/w, these highly efficient LEDs are built for the long-haul

High Quality Lens A premium clear cover allows precise light distribution, and will not yellow with age.

1



Ξ

ORDERING INFORMATION

SERIES	POWER (WATTS)	EQUIVALENT TO (WATTS)	LUMENS	WEIGHT	COLOR TEMP	INPUT VOLTAGE	MODEL NUMBER	ORDERING CODE
HYBRID LED SHOEBOX FLOOD LIGHT V4	60	200	9000	3.8kg	4000K	100-277VAC	SHB12R0060W-4000K-D-V4	SH-60W-40K-V4 🛛 🛶
						347V	SHB12R0060W-4000K-DH-V4	SH-60W-40K-V4-347V 🛛 🚓
	100	300	14000	4.0kg	4000K	100-277VAC	SHB12R0100W-4000K-D-V4	SH-100W-40K-V4 😪
	100				5000K	100-277VAC	SHB12R0100W-5000K-D-V4	SH-100W-50K-V4 🛛 🖘 😓
	150	400	20000	5.8kg	4000K	100-277VAC	SHB12R0150W-4000K-D-V4	SH-150W-40K-V4 🛛 🖘 😓
						347V	SHB12R0150W-4000K-DH-V4	SH-150W-40K-V4-347V 💷 🏤
					5000K	100-277VAC	SHB12R0150W-5000K-D-V4	SH-150W-50K-V4 🧈 🎭
						347V	SHB12R0150W-5000K-DH-V4	SH-150W-50K-V4-347V 🧈
	200	600	28000	6.1kg	5000K	100-277VAC	SHB12R0200W-5000K-D-V4	SH-200W-50K-V4 🛛 😪 😓
						347V	SHB12R0200W-5000K-DH-V4	SH-200W-50K-V4-347V
	300	0 1000	42000	8.5kg	5000K	100-277VAC	SHB12R0300W-5000K-D-V4	SH-300W-50K-V4 🛛 🖘 😓
						347V	SHB12R0300W-5000K-DH-V4	SH-300W-50K-V4-347V 🖘



Slip Fitter SH-SL-V4



Wall-Mount SH-WM-V4



Flood Light Bracket SH-BR-V4 FEATURES

Easy Installation (Insert and Screw Down) Robust Aluminum Body

Choice of 1 Mounting Accessory Included with Every Hybrid Shoebox Flood Light


SERIES	COMPATIBLE WITH	INSTALLATION	APPLICATION	MODEL NUMBER
SLIP FITTER V4	HYBRID SHOEBOX FLOOD LIGHTS V4	Ø2 1/2" ROUND POLE	ALLOWS ADJUSTMENT OF FIXTURE ANGLE	SH-SL-V4 ∞_
WALL-MOUNT V4	HYBRID SHOEBOX FLOOD LIGHTS V4	WALL/ SQUARE/ROUND POLE	DOES NOT REQUIRE JUNCTION BOX NO FIXTURE ANGLE ADJUSTMENT POSSIBLE	SH-WM-V4 ⊒⊗_
FLOOD LIGHT BRACKET V4	HYBRID SHOEBOX FLOOD LIGHTS V4	WALL/GROUND	ALLOWS ADJUSTMENT OF FIXTURE ANGLE REQUIRES JUNCTION BOX	SH-BR-V4 %_ ₽


ARANI.CA – 2555 RUE LÉGER, LASALLE, QC H8N 2V9, CANADA

MOUNTING INFORMATION

SLIP FITTER V4 SH-SL-V4









WALL MOUNT V4 SH-WM-V4


INSTALLATION WITHOUT INCLUDED ROUND PLATE









E




INSTALLATION WITH INCLUDED ROUND PLATE










BRACKET V4 SH-BR-V4







ACCESSORIES



FEATURES Easy Installation (Insert and Twist) Daylight Sensing

SERIES	COMPATIBLE WITH	MODEL NUMBER	
PHOTOCELL FOR	100-277VAC HYBRID SHOEBOX FLOOD LIGHT V4	SH-CELL-V4	.
HYBRID SHOEBOX FLOOD LIGHT V4	347V HYBRID SHOEBOX FLOOD LIGHT V4	SH-CELL-V4-347V	•








REFERENCE TABLE



Hybrid Shoebox Flood Light (60W/100W) with Slip-Fitter SH-60W-40K-V4 + SH-SL-V4 SH-100W-xxK-V4 + SH-SL-V4



Hybrid Shoebox Flood Light (150W/200W) with Slip-Fitter SH-150W-xxK-V4 + SH-SL-V4 SH-200W-xxK-V4 + SH-SL-V4



Hybrid Shoebox Flood Light (300W) with Slip-Fitter SH-300W-50K-V4 + SH-SL-V4



Hybrid Shoebox Flood Light (60W/100W) with Wall-Mount SH-60W-40K-V4 + SH-WM-V4 SH-100W-xxK-V4 + SH-WM-V4



Hybrid Shoebox Flood Light (150W/200W) with Wall-Mount SH-150W-xxK-V4 + SH-WM-V4 SH-200W-xxK-V4 + SH-WM-V4



Hybrid Shoebox Flood Light (300W) with Wall-Mount SH-300W-50K-V4 + SH-WM-V4



Hybrid Shoebox Flood Light (60W/100W) with Bracket SH-60W-40K-V4 + SH-BR-V4 SH-100W-xxK-V4 + SH-BR-V4





Hybrid Shoebox Flood Light (150W/200W) with Bracket SH-150W-xxK-V4 + SH-BR-V4 SH-200W-xxK-V4 + SH-BR-V4




Hybrid Shoebox Flood Light (300W) with Bracket SH-300W-50K-V4 + SH-BR-V4



Date:	Project:
Prepared for:	Туре:
Comments:	



NOTABLE ARANI PROJECTS AND IDEAS

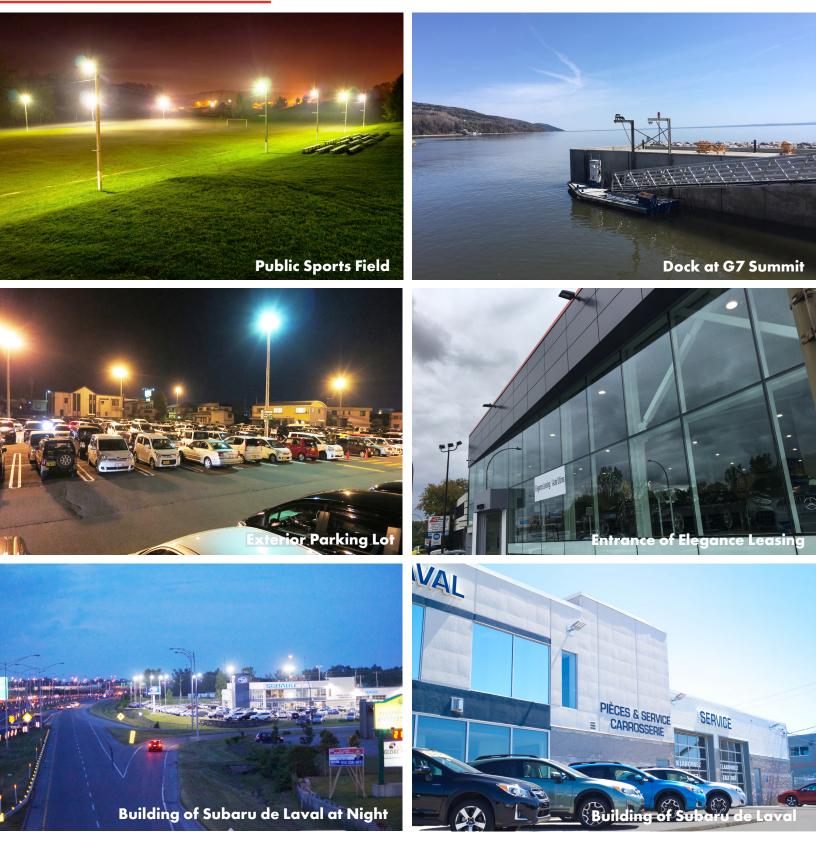

ARANI.CA — 2555 RUE LÉGER, LASALLE, QC H8N 2V9, CANADA

5