

| Date: | Project: |
|---------------|----------|
| Prepared for: | Type: |

Comments:



LINEAR UP & DOWN LIGHT

25% UP | 75% DOWN













SPECIFICATIONS

25% Up Light, 75% Down Light
Interconnected Installation Possible
Robust Aluminium Casing
Exceptionally Slim Profile
Beam Angle: 120°
Color Rendering Index: >83
Input Voltage: 110-260V Operating
Temperature: 0°c to 40°c

AVAILABILITY

40W 3000K / 4000K 110-260VAC


*This icon indicates a STOCK item:
Look for this Same Day Shipping icon below
in 'Ordering Information' for products that
ship out on the same day (orders must be
placed before 3pm EST)



SUPPORTED INSTALLATION METHODS

Linear Up & Down Light

SU-UD4-40W-xxK-S-V1

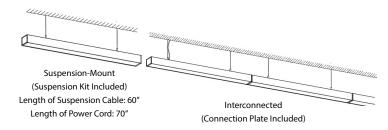

ORDERING INFORMATION

| SERIES | LENGTH | POWER (WATTS) | EQUIVALENT TO (WATTS) | LUMENS | COLOR TEMP | MODEL NUMBER |
|------------------------------|----------|------------------|--------------------------|--------|---------------------|--------------|
| LINEAR UP & DOWN LIGHT V2 | 40 | 150 | Up: 818 Down: 2453 | 3000K | SU-UD4-40W-30K-S-V1 | |
| | 4FT 40 | | | 4000K | SU-UD4-40W-40K-S-V1 | |

