

Date: _____ Project: _____
Prepared for: _____ Type: _____
Comments: _____

CLASSIC WALL PACK 2

CLASS I LUMINAIRE | IP65




5 Years



Lifetime
50 000 hours



IP65
Suitable for use in wet locations

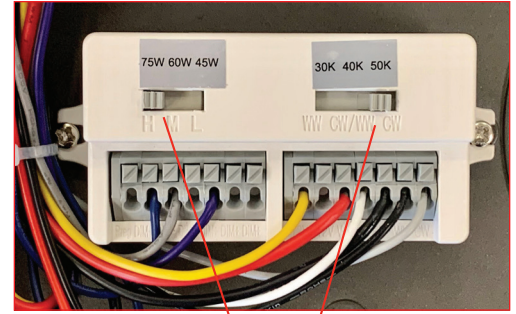

Switches
(Selectable Power and Selectable Color Temperature)

SPECIFICATIONS


- Class I Luminaire
- IP65 - Suitable for Wet Locations
- Robust Aluminum Die-Cast Casing
- Glass Lens
- Colour Rendering Index: >70
- Functioning Temperature: -40°C to 45°C
- Power Factor: 0.90
- THD($\%$) <math><20\%</math>

AVAILABILITY

- Power Selectable
- Selectable Colour Temperature
- Multi-Voltage (120-347V)
- 0-10V Dimmable



This is a STOCK item:
Look for this Same Day Shipping icon below in 'Ordering Information' for products that ship on the same day (orders placed before 3pm) from Montreal, Quebec or Calgary, Alberta

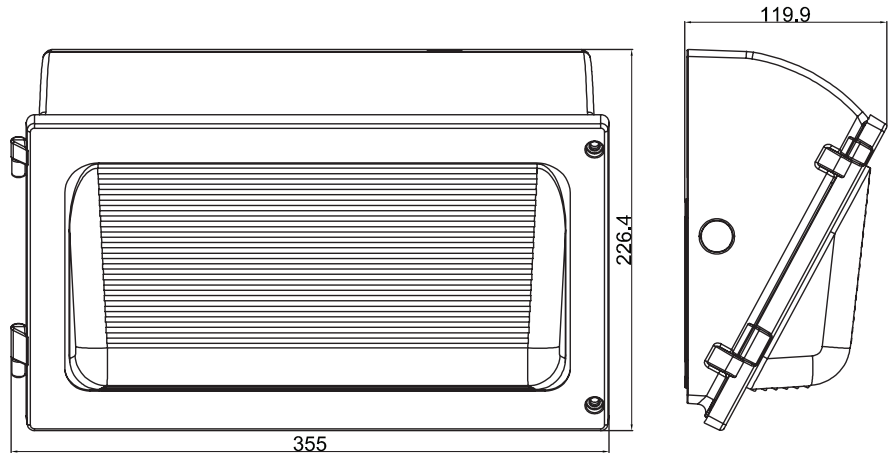

ORDERING INFORMATION

| SERIES | INPUT VOLTAGE | POWER | LUMENS | COLOUR | MODEL NUMBER | ORDERING NUMBER |
|----------------|---------------|--------------------------------|------------------------------|------------------------|---------------------------|---------------------|
| WALL PACK 2 V4 | 120-347V | VARIABLE 45W 60W 75W | 9750lm AT 75W (130lm/W) | 3000K/ 4000K/ 5000K | WAL12R0075W-7075C-30EA-V4 | WP2-45W-75W-VAR-V4 |
| | | VARIABLE 72W 96W 120W | 15600lm AT 120W (130lm/W) | 3000K/ 4000K/ 5000K | WAL12R0120W-7120C-30EA-V4 | WP2-72W-120W-VAR-V4 |



ACCESSORIES




Wire Guard
WP-AC-WG



Photocell
WP-CELL-V3 (120-277V)

| SERIES | COMPATIBLE WITH | ORDERING NUMBER |
|------------|-----------------|--|
| WIRE GUARD | WALL PACK 2 V4 | WP-AC-WG  |
| PHOTOCELL | WALL PACK 2 V4 | WP-CELL-V3  |

ILLUMINANCE AT A DISTANCE

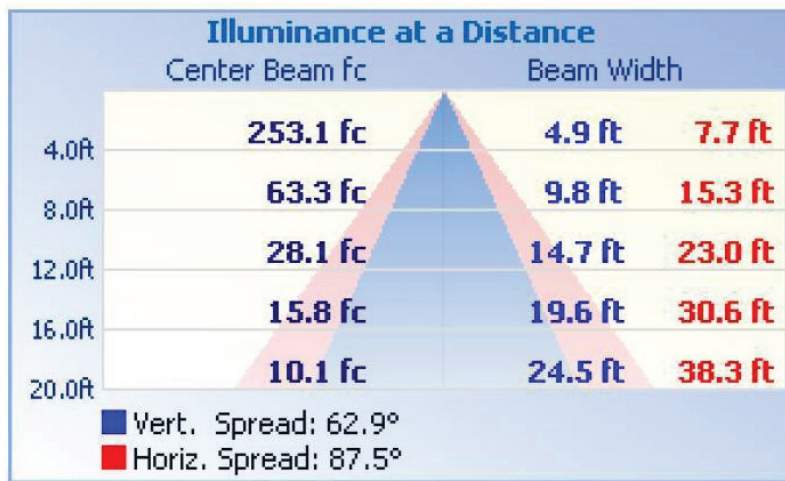

POLAR CANDELA DISTRIBUTION

