

**NE-832**

**Emergency Dual Remote Head**

Lamp: 6W Wedge Base Incandescent

**PRODUCT DESCRIPTION**

Remote head fixtures provide a superior aiming and flexible appearance along with excellent performance. Dual lighting heads provide strong ambient light levels to assist in emergency egress during power failure. Internal solid state switching automatically activates fixture during power loss. Universal single and dual-head DC remote emergency lighting modules. Connects to any 6V or 12V emergency battery available in most exit or emergency fixtures.

**CONSTRUCTION**

- Fully adjustable, glare free light heads with positive positioning lock
- Reliable slide friction position hold
- Injection molded thermoplastic housing

**LENS**

- Acrylic lens included

**MOUNTING**

- 5" Canopy matching round mounting plate for 3" or 4" box standard.
- Mounting hardware included.

**ANGLE ADJUSTABLE**

- 365° horizontal rotation and 160° vertical adjustment.

**ELECTRICAL**

**Voltage:** 6 Volt or 12 Volt Remote (6 Volt lamp(s) included)

**Lamps:** 6 Volt 6 Watt T5 Wedge Base (included)

**REMOTE**


Use with 6 Volt or 12 Volt remote output (lamp(s) must replaced for 12 volt operation).

**LABELS AND LISTINGS**

- UL 924 Compliant
- UL Listed for Damp Locations



**PRODUCT IMAGES & DIMENSIONS**

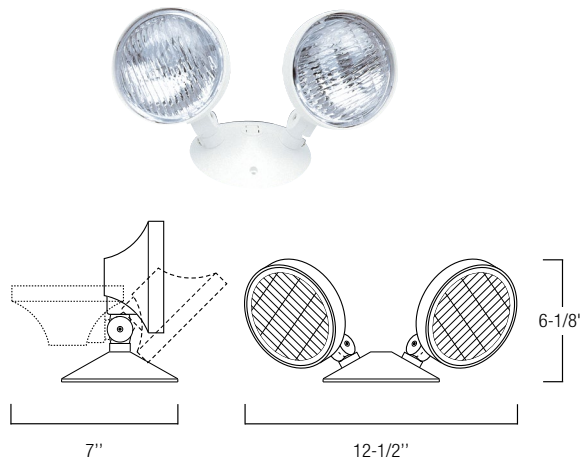

**Remote Emergency Heads**

Catalog No.

**NE-832** Round White Double Head / T5 lamp

\*Optional Accessories

**NEXS-P1** = Polycarbonate Vandal / Environmental Resistant Shield (Gasket for Wet Location)

**NEXS-M1** = Metal Shield: 16" L x 8" W x 8" H

Example: **NE-832** = Remote Emergency Adjustable Heads