

Date:	Project:
Prepared for:	Type:
Comments:	



WRAPAROUND FIXTURE

DIMMABLE



SPECIFICATIONS

Fully covers conventional junction box
Robust Aluminium Casing
Knockouts on Both Sides and Back
Suitable for Chain-Mounting in a Row
Color Rendering Index: >80
Operating Temperature: -10°C to 40°C

AVAILABILITY

2FT / 4FT
4000K / 5000K
120-277VAC / 347V


*This icon indicates a STOCK item: Look for this Same Day Shipping icon below in 'Ordering Information' for products that ship out on the same day (orders must be placed before 3pm EST)

Full ies File Available on Request

ORDERING INFORMATION



DIMENSIONS

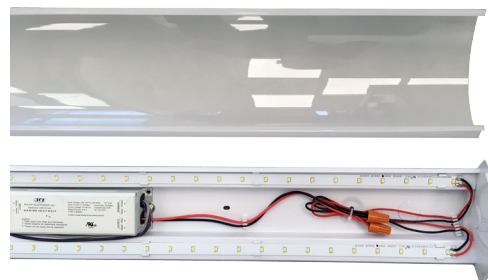

DESIGNED TO BE INSTALLED

Screwless Installation
Squeeze-In Lens
Frosted Lens for Dot-Free Lighting
Knockouts on Both Ends and Back
Lens fully covers junction box

SERIES	LENGTH	POWER (WATTS)	EQUIVALENT TO (WATTS)	LUMENS	COLOR TEMPERATURE	INPUT VOLTAGE	MODEL NUMBER
WRAPAROUND FIXTURE	2FT	25W	2 X 20W T8	3000	4000K	120-277VAC	WR-25W-40K-V1
						347V	WR-25W-40K-V1-347V
					5000K	120-277VAC	WR-25W-50K-V1
						347V	WR-25W-50K-V1-347V
	4FT	40W	2 X 32W T8	4800	4000K	120-277VAC	WR-40W-40K-V1
						347V	WR-40W-40K-V1-347V
					5000K	120-277VAC	WR-40W-50K-V1
						347V	WR-40W-50K-V1-347V