



Project	
Date	
Prepared by	
Model #	HBX1-1505-1

# HBX1-SERIES MONOPOINT HIGH BAY



## OVERVIEW

The HBX1-Series is the most versatile Monopoint High Bay offered in the North American market. Built using an ultra-thin, aluminum die cast design, it is a lightweight fixture that can be configured for almost any application. From the ability to add a junction box or battery backup to integrating a remote-controlled\* motion sensor or side mounting sensors and wireless adapters, the HBX1 is ready for today and the future. Offering five traditional reflector configurations and multiple mounting options, they are the only high bay you'll need to consider to meet the demands of every project.

## PRODUCT HIGHLIGHTS

- Polycarbonate "Fresnel" lens for even 360° light dispersal
- AkzoNobel powdercoated aluminum driver box and housing
- Built-in surge protection
- Includes hanging hook and 10' cord
- IP65 rated
- Options available: Integrated Junction Box, Emergency Battery Backup, Motion Sensors, Reflectors, Motion Sensor Remote, and Mounting options

### OPTICAL SPECIFICATIONS

Lumen Output (lm) <sub>1</sub>	20358 lm	Beam Angle (°) <sub>1</sub>	90°
CCT (K) <sub>1</sub>	5000K	LM80 Report (L <sub>70</sub> ) Hours	>54,000 hrs
CRI (Ra) <sub>1</sub>	80	ISTMT Report (L <sub>70</sub> ) Calculated Hours	156,000 hrs
Efficacy (lm/W) <sub>1</sub>	140 lm/W	Chromaticity Shift	±250K

### ELECTRICAL SPECIFICATIONS

Power	150W	Current Draw at 120V <sub>AC</sub> (A) <sub>2</sub>	1.2069A
Apparent Power (VA)	160.43VA	Current Draw at 208V <sub>AC</sub> (A) <sub>2</sub>	0.699A
System Wattage (W)	144.59W	Current Draw at 240V <sub>AC</sub> (A) <sub>2</sub>	0.614A
Replacement for	400W+ HID	Current Draw at 277V <sub>AC</sub> (A) <sub>2</sub>	0.5439A
Input Voltage	120-277V		

### LED AND DRIVER SPECIFICATIONS

LED Type	2835	THD	15.00%
Dimmable	0-10V	Driver Class	Class 2
Output Voltage (VDC)	24-40VDC	Surge Protection	6 kV
Power Factor	0.900	Inrush Current (A)	40A


## DIMENSIONS

Housing Material	Aluminum	Weight (kg/lbs)	4.15kg 9.13 lbs
Housing Color	Black	Installation Method	10' cord (pre-installed) Hook (incl.) Yoke or Pendant (optional)
Lens Material	Polycarbonate	Operation Range (°F/°C)	-40°F to 122°F/-40°C to 50°C
Dimensions (inch/mm)	12.93" $\Phi$ x 8.25" (H) 328.3 mm $\Phi$ x 209.5 mm (H)	Warranty	10 Years

## APPROVALS AND LISTINGS

DLC Premium	PLNVSHB03GBG	Wet Location Rated	Yes
UL/ETL	cULus	IP Rating	IP65
		IK Rating	IK10

### CANDELA


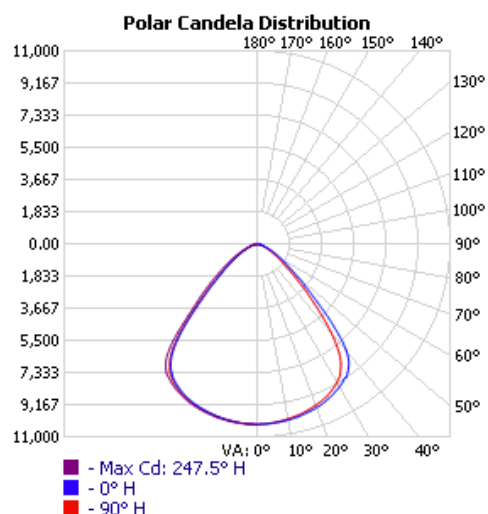


### ILLUMINANCE AT A DISTANCE


6.6ft / 2M	238.70 fc / 2569.30 LUX
9.8ft / 3M	106.09 fc / 1141.91 LUX
13.1ft / 4M	59.67 fc / 642.33 LUX
16.4ft / 5M	38.19 fc / 411.09 LUX
19.7ft / 6M	26.52 fc / 285.48 LUX

## DIMENSIONS


### NO REFLECTOR

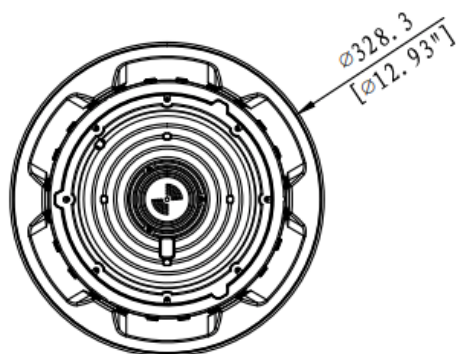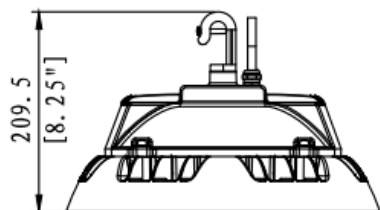


### ALUMINUM REFLECTOR




### PRISMATIC REFLECTOR



### PRISMATIC REFLECTOR + DROP LENS

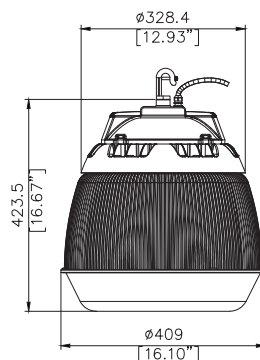

### PRISMATIC REFLECTOR + CONE LENS

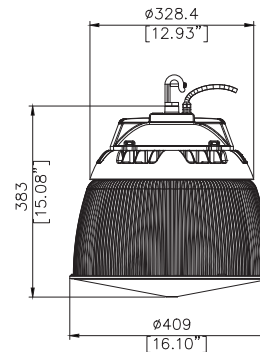

## REFLECTOR OPTIONS

	<b>HB-AR1X1</b>	Aluminum Reflector 80° (for 100W, 150W, 230W)		<b>HB-PR1X1</b>	Prismatic Reflector 75° (for 100W, 150W, 230W)
	<b>HB-CLX1</b>	Cone Lens Attachment for HBX1 Prismatic Reflectors		<b>HB-DLX1</b>	Drop Lens Attachment for HBX1 Prismatic Reflectors

## ACCESSORIES

	<b>HB-JB1X1</b>	Junction Box for HBX1 High Bays (100W, 150W, 230W models)		<b>HB-WG1X1</b>	Wire Guard for HBX1 High Bays 100W, 150W, 230W models
	<b>HB-MSX1-1</b>	Integrated Motion Sensor for 120-277V HBX1 High Bays		<b>HB-34NPTAX1</b>	3/4\" NPT Adaptor for HBX1 High Bays
	<b>HB-RCX1</b>	Remote Control for 120-277V Integrated Motion Sensors (HBX1 High Bays)		<b>HB-YKX1</b>	Yoke Mount for HBX1 High Bays
	<b>HB-24EBX1</b>	24W Emergency Battery for 120-277 HBX1 High Bays		<b>HB-EYEBOLT</b>	Eyebolt for HBX1 High Bays
				<b>HB-CARABINER</b>	Carabiner for HBX1 High Bays

## PRODUCT KEY

HBX1

-

-

-

-

Adders

**Product Series**

**Wattage**

- ☐ 100
- ☐ 150
- ☐ 230
- ☐ 300

**Voltage**

- ☐ 1 - 120-277V
- ☐ 2 - 270-480V

**CCT**

- ☐ 4 - 4000K
- ☐ 5 - 5000K

Example: **HBX1-1505-1-M1EB2**

**FACTORY INSTALLED ADDERS**

**Cord End Adders**

- ☐ N01 5-15P 120V 15A Straight Plug
- ☐ N02 6-15P 240V 15A Straight Plug
- ☐ N04 L5-15P 120V 15A Locking Plug
- ☐ N05 L6-15P 240V 15A Locking Plug
- ☐ N06 L7-15P 277V 15A Locking Plug
- ☐ N07 5-20P 120V 20A Straight Plug
- ☐ N08 6-20P 240V 20A Straight Plug
- ☐ N09 7-20P 277V 20A Straight Plug
- ☐ N10 L5-20P 120V 20A Locking Plug
- ☐ N11 L6-20P 240V 20A Locking Plug
- ☐ N12 L7-20P 277V 20A Locking Plug
- ☐ N13 L24-20P 347V 20A Locking Plug
- ☐ N14 L8-20P 480V 20A Locking Plug

**Motion Sensor Adders**

- ☐ M2 Integrated Motion Sensor 120-277V
- ☐ M3 Motion Sensor and Arm 347-480V

**Emergency Battery Adders**

- ☐ EB2 24W Emergency Battery Backup  
(100-277V only, not compatible with motion sensor)

1. Due to the special conditions of manufacturing, the typical data of optical specifications can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from the typical data.  
2. Exceeding maximum ratings for input voltage and current will cause hazardous overload and will likely destroy the LED fixture.  
3. Refer to Warranty Terms & Conditions available at [premiseled.com/warranty](http://premiseled.com/warranty)