




LED Paddle Retrofit Kits Specification




Red LED Candelabra
Base Retrofit Kit,
2 adaptors

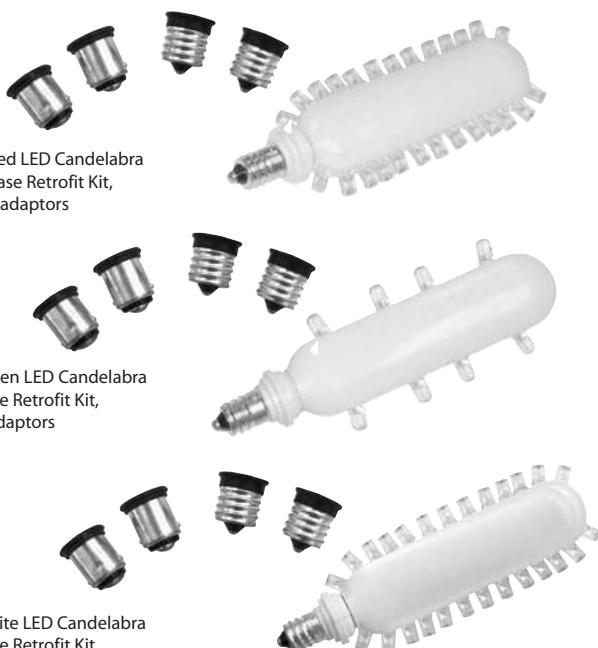

Green LED Candelabra
Base Retrofit Kit,
2 adaptors



White LED Candelabra
Base Retrofit Kit,
2 adaptors

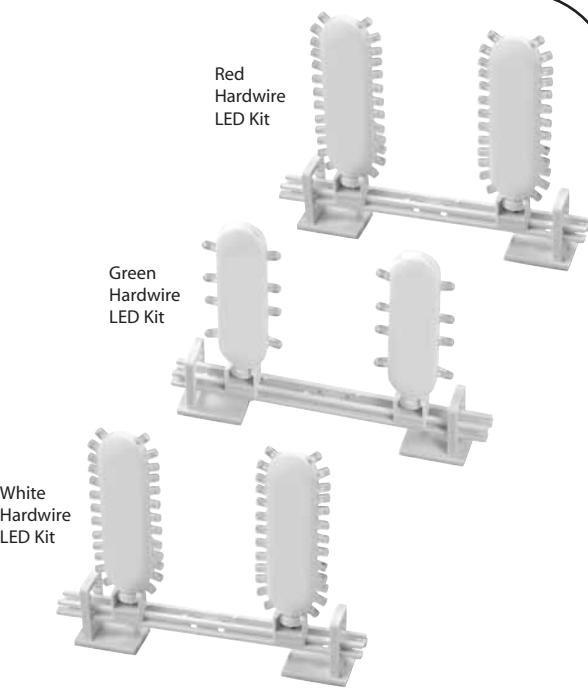

Red
Hardwire
LED Kit

Green
Hardwire
LED Kit

White
Hardwire
LED Kit

Features

- New, brighter LEDs
- Solid construction, made to retrofit into existing exit signs
- More compact design allows unit to fit into more applications
- Available with white, green or red LEDs
- Zero maintenance & easy installation
- Excellent energy efficiency!
- ETL Listed, conforms to UL924
- 20715, 20716, 20717 & 20718 CUL Listed.
- Innovative concave LED design directs light output where you need it the most in existing exit signs!
- Hardwire version is both 120V and 277V and comes complete with mounting bracket
- LED Lamp Dimensions 4.75" x 1.65" x 0.6"
- Life expectancy 10 years at full lumen output

Ordering Information:

Catalog Model #	Description	M.O.L. (Inches)	Width (Inches)	Depth (Inches)	Input Voltage	Watts per lamp
20715	Red LED Candelabra Base Retrofit Kit, 2 Adapt.	4.75"	1.65"	.60"	120V	1.2W
20716	Red Hardwire LED Kit 120 / 277V	5.63"	6.9"	1.0"	120 / 277V	1.2W
20717	Green LED Candelabra Base Retrofit Kit, 2 Adapt.	4.75"	1.65"	.60"	120V	0.7W
20718	Green Hardwire LED Kit 120 / 277V	5.63"	6.9"	1.0"	120 / 277V	0.7W
20719	White LED Candelabra Base Retrofit Kit, 2 Adapt.	4.70"	1.65"	.60"	120V	1.7W
20721	White Hardwire LED Kit 120 / 277V	4.75"	6.9"	1.0"	120 / 277V	1.8W



TCP, Inc.

325 Campus Drive | Aurora, Ohio 44202 | P: 800-324-1496 | F: 330-995-6188 | tcp.com

©TCP, Inc. 2009/40999