



# CEILING LIGHT

FM-5  
02/05

## QUESTIONS OR CONCERNS CONTACT CANARM AT:

1-800-265-1833 (English)


1-800-567-2513 (French)

Monday through Friday 8:00 AM to 5:00 PM E.S.T.

## TOOLS AND MATERIALS REQUIRED:



Phillips  
Screwdriver



Wire Cutters

Wiring supplies  
as required by  
electrical code



Pliers




Wrench

## SAFETY PRECAUTIONS:


- 1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.  
DO NOT REMOVE INSULATION FROM FIXTURE.**
- 2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**
- 3. CAUTION – RISK OF FIRE. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.**

**NOTE: Product May Not Look Exactly As Shown In Figures.**


## INSTALLATION:



**1.** Install nipple to mounting bracket and lock in place with hex nut. Nipple must be adjusted to clear the hole in the center of the fixture.




**2.** Attach mounting bracket to wiring box with wiring box screws, start ground screw into mounting bracket.

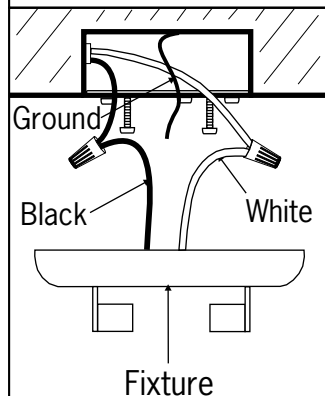


**3.** Connect the ground wire to the ground screw in the electrical box. Connect the black wire (or wire marked "SPT-1") from the fixture to the black wire in the electrical box and connect the white wire from the fixture to the white wire in the electrical box.


**Note:** Your fixture may have either one or two sockets depending on the model.

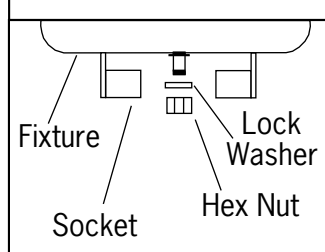


**4.** Install the pan through the centre screw stud. Secure the pan using a lock washer and hex nut.

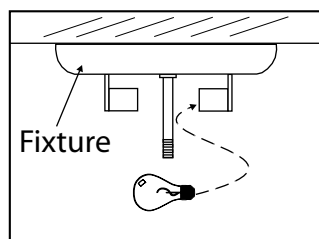

**5.** Install proper bulb type and wattage.

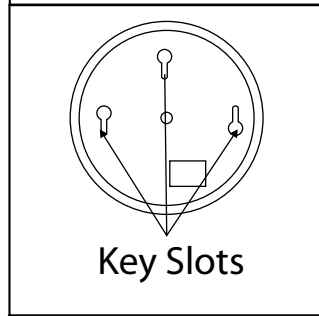

**6.** Line up the screws in the glass with the key slots in the pan. Push the screws and glass onto the pan and turn the glass to secure in place.

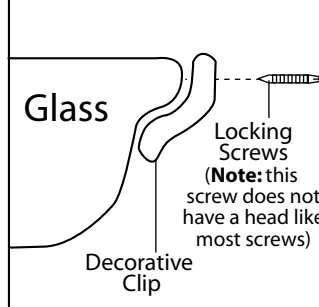

**7. Note: You must lock the glass in place using the locking screw using the tool provided.**