

CEILING LIGHT

FM-1 09/10

QUESTIONS OR CONCERNS CONTACT CANARM AT:

1-800-265-1833 (English) / 1-800-567-2513 (French) Monday through Friday 8:00 AM to 5:00 PM E.S.T.

\i\

"INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS"
"READ ALL INSTRUCTIONS"

"IMPORTANT SAFETY INSTRUCTIONS" "SAVE THESE INSTRUCTIONS"

TOOLS AND MATERIALS REQUIRED:





Wiring supplies as required by electrical code





SAFETY PRECAUTIONS:


- 1.TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.

 DO NOT REMOVE INSULATION FROM FIXTURE.
- 2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- 3. CAUTION RISK OF FIRE. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.
- 4. CONNECT THE GROUND WIRES (BARE COPPER OR GREEN) FROM YOUR FIXTURE TO THE GROUND WIRE (BARE COPPER OR GREEN) OR GROUND SCREW IN THE ELECTRICAL OUTLET BOX.

NOTE: Product May Not Look Exactly As Shown In Figures.

Note: Your fixture may have either one or two sockets depending on the model.

INSTALLATION:

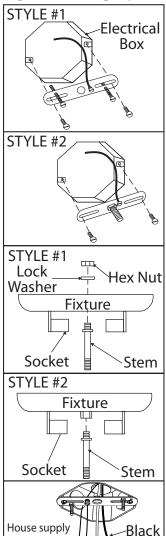

Ground wire

Fixture /

Ground wire

White

NOTE: This product will be style #1 or #2 but you don't have the option of both.

¶ o Style #1: Install the mounting bracket to the electrical box using two electrical box screws (not included). (Note: Do not adjust the two support screws at this time.)


Style #2: Attach mounting bracket to wiring box with wiring box screws.

Note: Your fixture may have either one or two sockets depending on the model.

2. **Style #1**: Attach the stem to the fixture using a lock washer and hex nut.

Style #2: Secure the centre stem onto the screw stud.

3. Connect the ground wires (bare copper or green) from your fixture to the ground wire (bare copper or green) or ground screw in the electrical outlet box. Connect the black wire (or wire with marking) from the fixture to the black wire in the electrical box and connect the white wire from the fixture to the white wire in the electrical box.

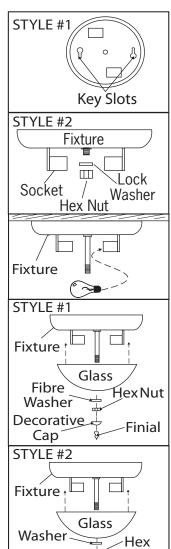

Style #1: Tuck the electrical wires into the electrical box and position the "key slots" over the support screws. Turn and lock the support screws into the "key slots". Tighten the support screws into place.

Style #2: Install the pan through the centre screw stud. Secure the pan using a lock washer and hex nut.

- 5. Install the proper bulb type and wattage (not included).
- **6. Note:** Refer to the style of assembly that matches the style of your fixture.

Style #1: Secure the glass in place using the decorative cap, hex nut, fibre washer and finial.

Style #2: Secure the glass in place using the fiber washer, hex nut and button.

Style #3: Attach the glass shade to the fixture using the thumb screws (tighten with fingers only).

Imported By: CANARM LTD., 2157 Parkedale Ave., Brockville, Ontario, K6V 5V6, Tel: (613) 342-5424, Fax: (613) 342-8437

Button

STYLE#3

Thumb Screws Nut

Fixture