


MINILUX

3-1/2" Series - Contractor Pack

Project	_____
Notes	_____
Fixture Type	_____
Date	_____

Complete Unit: Insulated Housing, Trim and LED lamp (4 units per Contractor Pack)

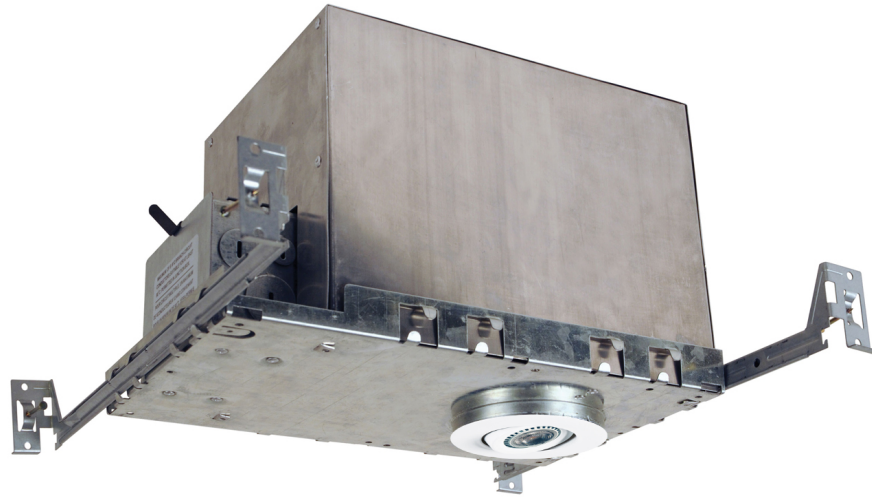

DESCRIPTION

Insulated Housing, Airtight, can be installed in damp locations, indoor and outdoor. Insulated housings are only available in Contractor Pack of 4 complete units.

HOUSING SPECIFICATIONS

HOUSING DETAILS

MAX 50W
23 gauge galvanized steel and aluminum
(0,030" / 0,76 mm).
Below-ceiling accessible.

MOUNTING

Perfect fit into ceiling.
No light leakage.
Mounting bars extend from 10" (254 mm) to 24 1/2"
(622 mm) to fit in most ceiling structures.

CEILING FINISH



Cutout	Thickness
Ø 3-5/8" (92 mm)	Installs in ceilings up to 1-3/8" (35 mm) thick.

VOLTAGE

120 Volts (CAN & USA)

CERTIFICATIONS

- cULus Listed for damp locations **E252582**
- Energy Star® certified lamp included
- Certified AirTight ASTM E283

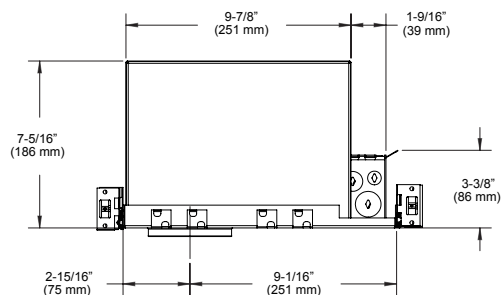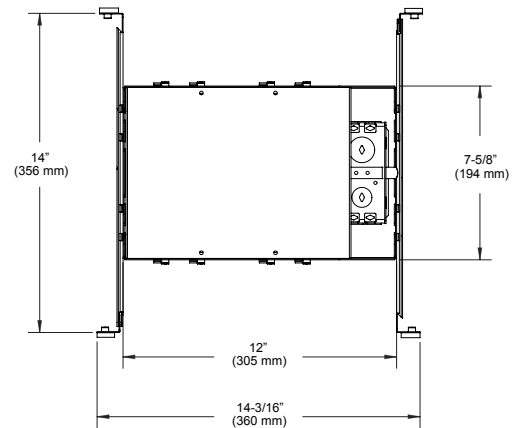

MINILUX

3-1/2" Series - Contractor Pack

TRIM SPECIFICATIONS

LIGHT SOURCE **High Brightness GU10 LED**
 Color: Warm White (3,000K)
 500 Lumen output
 CRI: 80 +
 Beam Angle: 40°
 Lifespan: 50,000 hours
 Power Consumption: 7W
 Compatible with most Incandescent, Magnetic Low Voltage (MLV) and Electronic Low Voltage (ELV) dimmers.




Due to constant evolution of LED lamps and associated dimmers we must test them regularly. We invite you to visit our Web site to consult our dimmer compatibility list: www.contrastlighting.com

TRIM TYPES **GU10**
 Adjustable up to 30° White Trim (-G01)
 Adjustable up to 30° Satin Nickel Trim (-G13)


WARRANTY

- Housing and Trim: 1 year
- GU10 lamp, 50,000 hours (5 years)

GU10 Adjustable

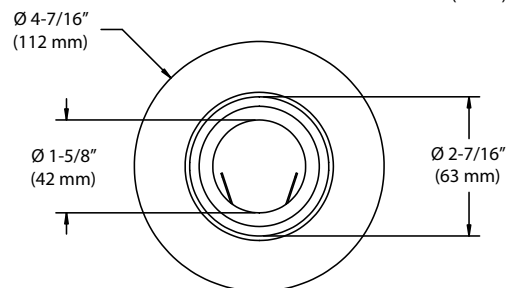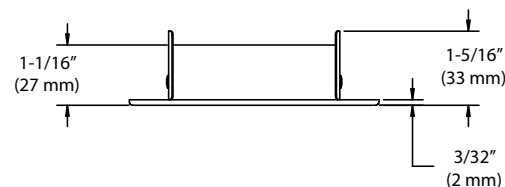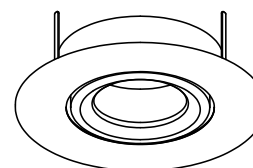

CODIFICATION EXAMPLE

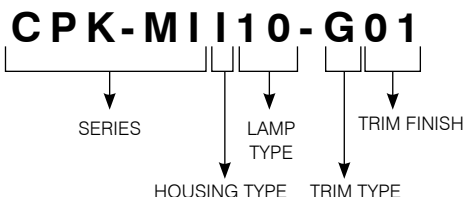

ORDERING CODE for Contractor Pack (4 complete units)

SERIES	HOUSING TYPE	LAMP TYPE	TRIM TYPE	TRIM FINISH
CPK-MI	I	10	-G	
CPK-MI	I IC Box	10 GU10	-G Adjustable	01 White 13 Satin Nickel

