


PRILUX


4" Series

Project	
Notes	
Fixture Type	
Date	

Complete Unit: IC Air Tight Remodeler, Trim and LED lamp

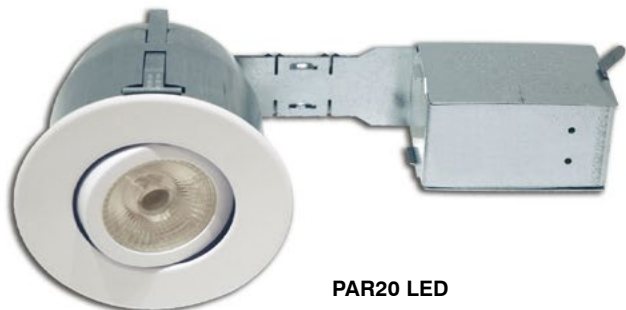

PAR20 LED

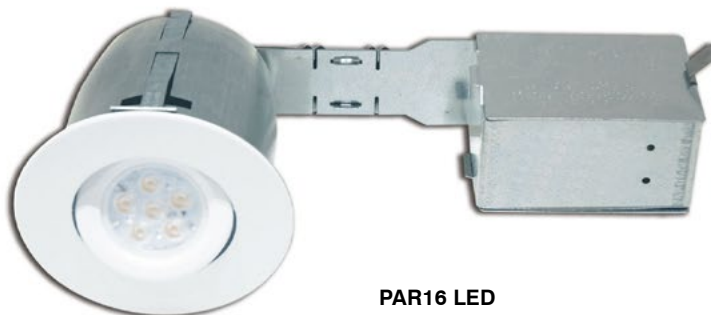

PAR16 LED

DESCRIPTION

IC (except polyurethane) and Air Tight Remodeler, ASTM E283 certified can be installed in a damp or wet (shower trim only) location, indoor and outdoor.

HOUSING SPECIFICATIONS

HOUSING DETAILS

LED Lamp MAX 10W

Flexible channel wire bracket made of steel, bending up to 45° vertically for ease of installation in confined spaces

0,051" (1,3 mm) thickness galvanized steel
Below-ceiling accessible

MOUNTING

Perfect fit to ceiling. No light leakage
Requires a 7" (178 mm) clearance beyond the ceiling level.

CEILING FINISH

Cutout	Thickness
Ø 4-1/4" (108 mm)	Installs to ceilings up to 7/8" (22 mm) thick.

Approved for use in insulated ceilings in direct contact with the insulating material (except polyurethane).

THERMAL PROTECTOR



TC 194°F (90°C)

VOLTAGE

120 Volts

CERTIFICATIONS

- cULus Listed for damp or wet (shower trim only) locations **E174023**
- Energy Star® certified lamp included
- Certified Air Tight ASTM E283

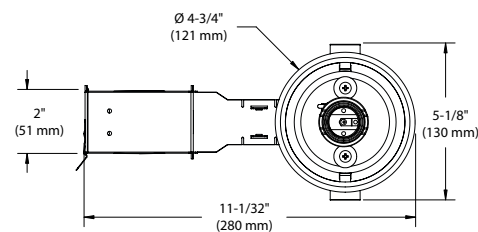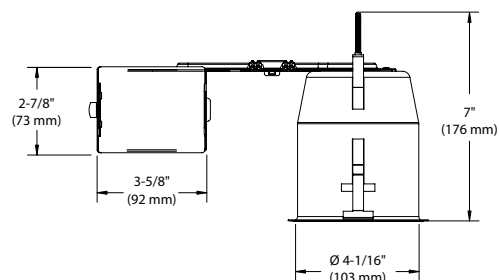

PRILUX

4" Series


TRIM SPECIFICATIONS

LIGHT SOURCE	PAR16 LED High Brightness Color: Warm white (3,000K) 500 Lumens output CRI: 90 + Beam Angle: 40° Lifespan: 50,000 hours Power Consumption: 6.5W Compatible with most incandescent, Magnetic Low Voltage (MLV) and Electronic Low Voltage (ELV) dimmers.	PAR20 LED High Brightness Color: Warm white (3,000K) 600 Lumens output CRI: 90 + Beam Angle: 40° Lifespan: 50,000 hours Power Consumption: 7W Compatible with most incandescent, Magnetic Low Voltage (MLV) and Electronic Low Voltage (ELV) dimmers.
--------------	---	---

Due to constant evolution of LED lamps and associated dimmers we must test them regularly. We invite you to consult frequently our Web site to find our dimmer compatibility list: www.contrastlighting.com

TRIM TYPES	Round Adjustable Trim up to 20° for PAR16 LED and PAR20 LED in White (-G01) , Matte White (-G11) or Satin Nickel (-G13) and for PAR20 LED only Matte Black (-G22)
	Round Adjustable Trim up to 20° for PAR16 LED White with Black Step Baffle (-B01B) and for PAR20 LED White with White Step Baffle (-B01W) or Black Step Baffle (-B01B)
	Round Shower Trim for PAR16 LED and PAR20 LED in White (-S01) and for PAR20 LED only Matte White (-S11) and Satin Nickel (-S13)


WARRANTY	• Housing and Trims: 1 year
	• PAR16 LED and PAR20 LED lamps, 50,000 hours (5 years)

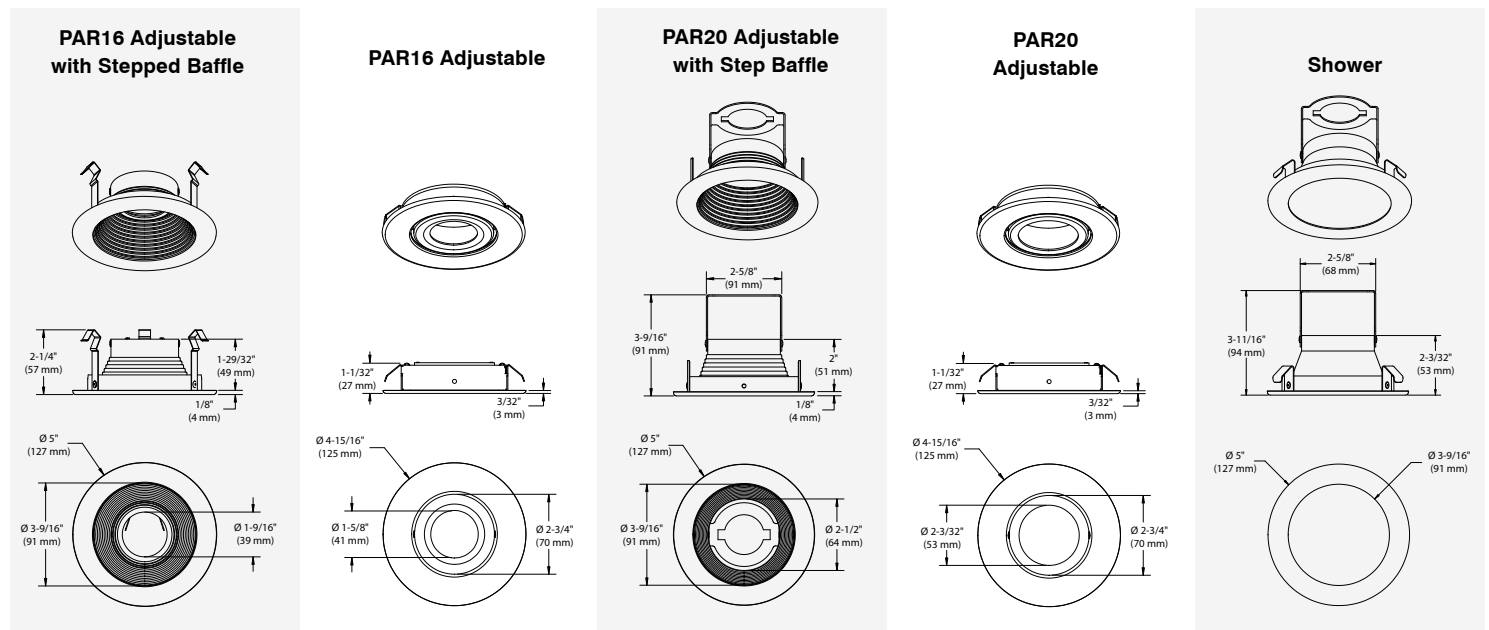

PRILUX

4" Series

CODIFICATION EXAMPLE

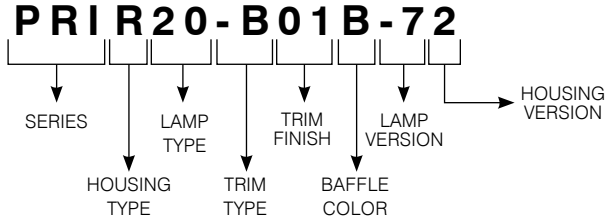

ORDERING CODE for Complete Unit

SERIES	HOUSING TYPE	LAMP TYPE	TRIM TYPE	TRIM FINISH	BAFFLE COLOR	LAMP VERSION	HOUSING VERSION			
PRI	R					-7	2			
PRI	R	IC Remodel	16	PAR16	-G	Adjustable	01 White 11 Matte White 13 Satin Nickel	N/A	-7 Generation 7	2 Generation 2
		16	PAR16	-B	Adjustable with Stepped Baffle	01 White	B Black			
		16	PAR16	-S	Shower	01 White	N/A			
		20	PAR20	-G	Adjustable	01 White 11 Matte White 13 Satin Nickel 22 Matte Black	N/A			
		20	PAR20	-B	Adjustable with Stepped Baffle	01 White	W White B Black			
		20	PAR20	-S	Shower	01 White 11 Matte White 13 Satin Nickel	N/A			

Note: For Contractor Pack (6 Complete Units), add **CPK** at the beginning of the ordering code.

Ex.: **CPKPRIR20-G01-72 (PAR20)**

CPKPRIR16-G01-72 (PAR16)



CONTRASTE

1009, rue du Parc Industriel
Lévis (Québec) G6Z 1C5 Canada
Tel.: 1-888-839-4624 Fax: 1-877-839-7057
info@contrastlighting.com
www.contrastlighting.com

© 2017 Contrast Lighting M.L. Inc.
All rights reserved

Contrast Lighting reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.