FL04B Flood / Area Light

60W | 4000K | 120-347V






*CSCLED

TRUE UNIVERSAL POWER INPUT FROM 120-347V!

A versatile, clean, and modern appearance that brings a pleasing aesthetic to any project

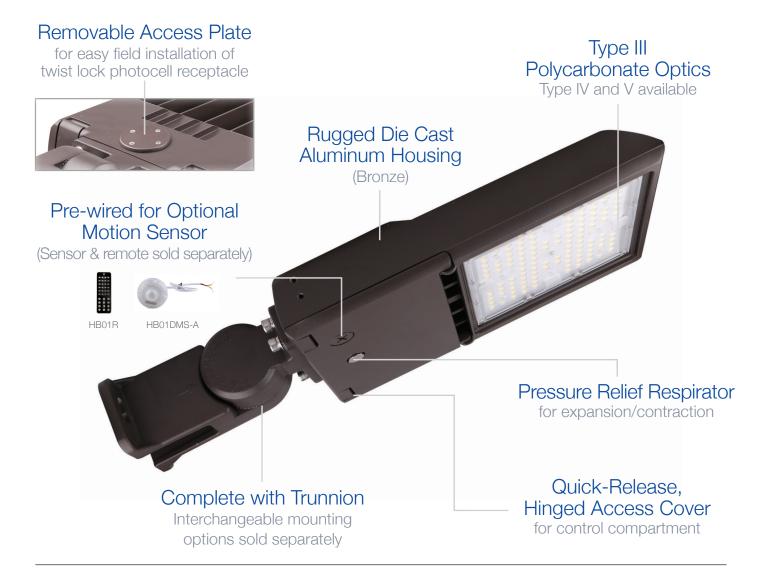

Accessories (Ordered Separately): Slip Fit, Pole Mount, Multi Mount, Motion Sensor Remote, Motion Sensor, Photocell and Receptacle











FL04-SF

FL04-PM

FL04-MM

HB01R

HB01DMS-A

TECHNICAL DATA






LIGHT SPECIFICATIONS

Lumens	8,123 lm	
Efficacy	136 lm/W	
CCT	4000K	
CRI	73	
L70 Life	50,000 hrs	
Dimmable	0-10V	
Warranty	10-year	

APPROVALS AND LISTINGS

cUL	E482965
DLC	PLY9N8AJ8IOL

ISOCANDELA



ILLUMINANCE AT A DISTANCE

	Illuminance at a Distance				
	Center Beam fc	Beam Wi	dth		
17.0R	6.63 fc	58.4 ft	168.4 ft		
34.0ft	1.66 fc	116.9 ft	336.8 ft		
51.0R	0.74 fc	175.3 ft	505.1 ft		
68.0R	0.41 fc	233.7 ft	673.5 ft		
85.0ft	0.27 fc	292.2 ft			
102.0R	0.18 fc	350.6 ft 1	1,010.3 ft		
■ Vert. Spread: 119.6° ■ Horiz. Spread: 157.2°					

ELECTRICAL

Wattage	60W
Voltage	120-347V
Power Factor	0.9
THD	15%
Operating Temp	-30 to 50°C

CONSTRUCTION

Housing	Aluminum
Cover	Polycarbonate
Finish	Bronze
IP Rating	IP65
EPA	2.37 ft ²
Net Weight	4.26 kg
Gross Weight	5.26 kg
Carton Qty	1
Carton Dimensions	710 x 295 x 155 mm

ACCESSORIES (SOLD SEPARATELY)

Slip Fit	FL04-SF
Pole Mount	FL04-PM
Multi Mount	FL04-MM
Motion Sensor	HB01DMS-A
Motion Sensor Remote	HB01R
Photocell and Receptable for 120-277V site	JL-200 and JL-205LV
Photocell and Receptable for 277-480V site	JL-200 and JL-207E

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com