

FL04B Flood / Area Light

80W | 4000K | 120-347V




TRUE UNIVERSAL POWER INPUT FROM 120-347V!

A versatile, clean, and modern appearance that brings a pleasing aesthetic to any project

Removable Access Plate

for easy field installation of twist lock photocell receptacle

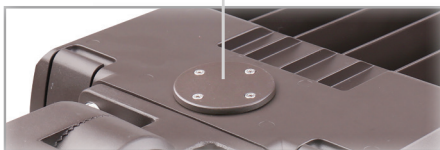

Type III
Polycarbonate Optics
Type IV and V available

Rugged Die Cast Aluminum Housing
(Bronze)


Pre-wired for Optional Motion Sensor
(Sensor & remote sold separately)



HB01R



HB01DMS-A

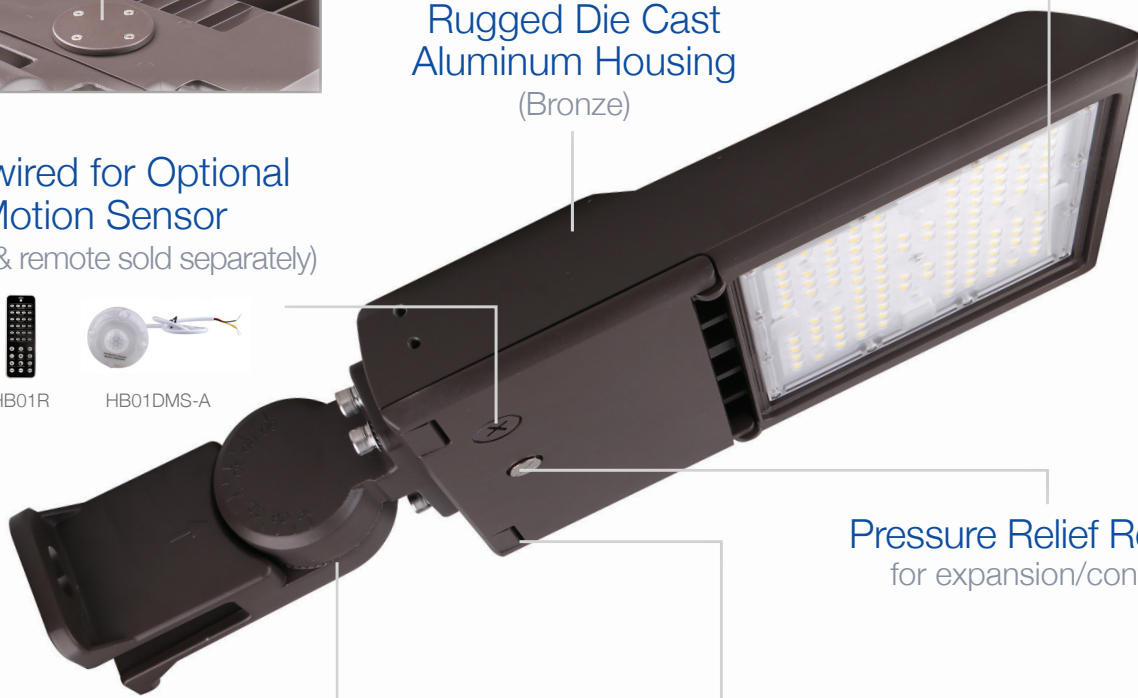

Pressure Relief Respirator
for expansion/contraction

Complete with Trunnion
Interchangeable mounting options sold separately

Quick-Release, Hinged Access Cover
for control compartment

Accessories (Ordered Separately):
Slip Fit, Pole Mount, Multi Mount, Motion Sensor Remote, Motion Sensor, Photocell and Receptacle



FL04-SF



FL04-PM



FL04-MM



HB01R



HB01DMS-A

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	10,606 lm
Efficacy	138 lm/W
CCT	4000K
CRI	73
L70 Life	50,000 hrs
Dimmable	0-10V
Warranty	10-year

APPROVALS AND LISTINGS

cUL	E482965
DLC	PLPAT5X2W04M

ISOCANDELA

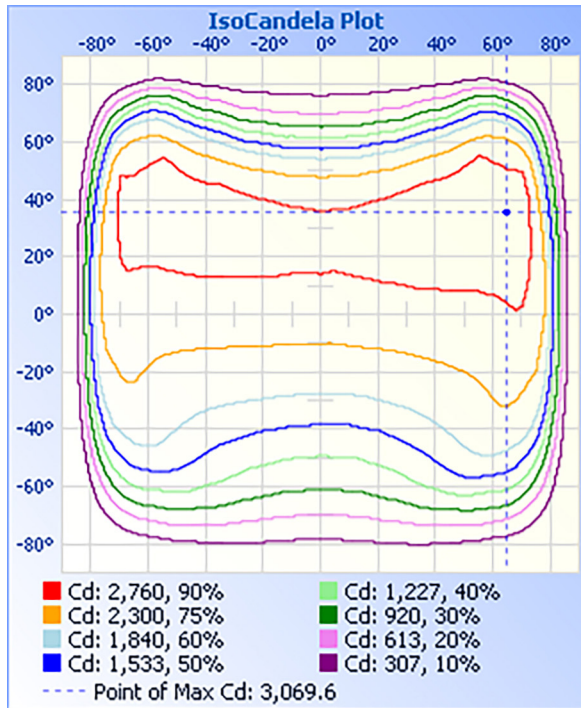

ELECTRICAL

Wattage	80W
Voltage	120-347V
Power Factor	0.9
THD	20%
Operating Temp	-30 to 50°C

CONSTRUCTION

Housing	Aluminum
Cover	Polycarbonate
Finish	Bronze
IP Rating	IP65
EPA	2.37 ft ²
Net Weight	4.43 kg
Gross Weight	5.43 kg
Carton Qty	1
Carton Dimensions	710 x 295 x 155 mm

ACCESSORIES (SOLD SEPARATELY)

Slip Fit	FL04-SF
Pole Mount	FL04-PM
Multi Mount	FL04-MM
Motion Sensor	HB01DMS-A
Motion Sensor Remote	HB01R
Photocell and Receptacle for 120-277V site	JL-200 and JL-205LV
Photocell and Receptacle for 277-480V site	JL-200 and JL-207E

ILLUMINANCE AT A DISTANCE

