

Assembly Instruction Sheet #S-1043W12 For Style 1043W12


Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.
Light Source: (1) 120V LED 14W DIMMABLE (4000K)
Estimated Assembly Time: 15-30 minutes

Preparation: Identify and label all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents

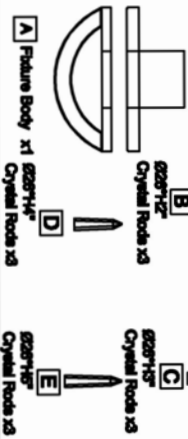

Hardware Contents

PART NUMBER	DESCRIPTION	QUANTITY
AA	Cap Nut	3ea
DD	Backplate	3ea
DD	Mounting Screws	3ea
DD	Lock Washers	3ea
EE	Mounting Bracket	3ea

STEP 1 - Attach Mounting Screws, Lock Washers and Hex Nuts to Mounting Bracket.

A. Line up a set of holes on the Mounting bracket (EE) and Holes on the Backplate. Thread Mounting Screws (DD) into the holes on the Mounting bracket (EE). Pass Lock Washers and Thread Hex Nuts onto the Mounting Screws (DD). Hand tighten until snug.




Figure 1

STEP 2 - Attach Mounting Bracket to Outlet Box

A. Pass the supply wires through the Mounting bracket (EE). Attach the Mounting bracket (EE) to the Outlet Box with the Head of the Green Ground Screw facing you. Secure it with Outlet Box Screws. Tighten until snug.




Figure 2

STEP 3 - Fit Backplate to Mounting Bracket Assembly

A. Fit the backplate to Mounting Screws (DD) and secure with Cap nut (AA). Note: The backplate should be snug against the ceiling and the Cap nut (AA). If not, adjust the length of the Mounting Screws (DD) by unscrewing the Hex Nut and Lock Washer and then reinserting Mounting Screws (DD) in or out of the Mounting bracket (EE) until the correct length is achieved. Once the backplate is secure, remove the Cap nut (AA) and backplate and proceed to Step 4




Figure 3

STEP 4 - Wire Connections

A. Use standard wire connections to make all wire connections. Twist connections until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully slide all the connected wires into the Outlet Box.

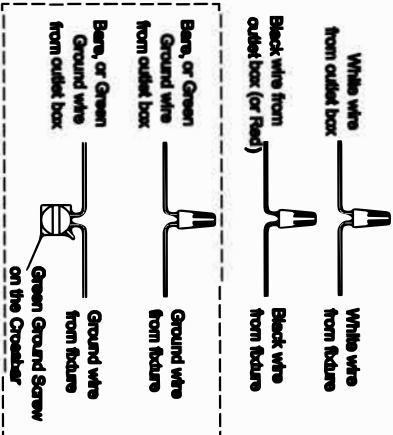


Figure 4

STEP 5 - Install Backplate to Ceiling

A. Carefully push all wires into the outlet box and position the backplate of the Fixture Body (A) over the outlet box. Align the holes in the backplate with the Mounting Screws (DD). Secure with Cap nut (AA) and hand tighten until snug.





Figure 5

STEP 6 - Install Oval Crystal.

A. Put the Crystal Rods (B) (C) (D) (E) on the Fixture Body etc.



- B 6267H2 Crystal Rods x3
- C 6267H3 Crystal Rods x3
- D 6267H4 Crystal Rods x3
- E 6267H5 Crystal Rods x3

Figure 6