


Assembly Instruction Sheet #IS-9601P42 For Style 9601P42

Tools Required: Flathead screwdriver, Pliers screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.
Light Source: (9) E26 Candelabra Base Bulbs 60W (Manufacturer Included).
Estimated Assembly Time: 30-40 minutes.
Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.


⚠ Warnings and Cautions
 Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents

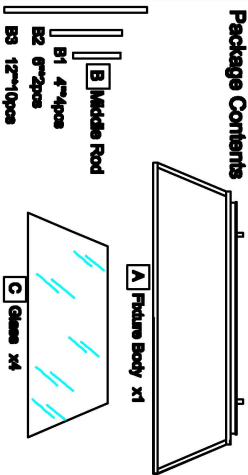

PART	DESCRIPTION	QUANTITY
AA	Cap Nut	One
BB	Wire Nut	One
CC	Outlet Box	One
DD	Mounting Bracket	One
EE	Hex Nut	One
FF	Lock Washer	One
GG	Thread Mounting Screw	One
HH	Hex Nuts	One
II	Washers	One
JJ	Pass Lock Nuts	One
KK	Pass Lock Nuts	One
LL	Pass Lock Nuts	One
MM	Pass Lock Nuts	One
NN	Pass Lock Nuts	One
OO	Pass Lock Nuts	One
PP	Pass Lock Nuts	One
QQ	Pass Lock Nuts	One
RR	Pass Lock Nuts	One
SS	Pass Lock Nuts	One
TT	Pass Lock Nuts	One
UU	Pass Lock Nuts	One
VV	Pass Lock Nuts	One
WW	Pass Lock Nuts	One
XX	Pass Lock Nuts	One
YY	Pass Lock Nuts	One
ZZ	Pass Lock Nuts	One

STEP 1 - Install Rods to Fixture Body
 A. Thread the power cord to the Middle Rods, fit the Middle Rods with the fixture body then the same to connect the other pieces of Rods, finally fit the Canopy with the Rods.

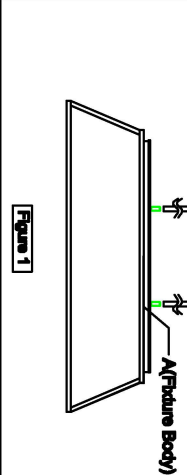

STEP 2 - Attach Mounting Screws, Lock Washers and Hex Nuts to Mounting Bracket.

A. Line up a set of holes on the Mounting bracket (EE) and Holes on the ceiling canopy. Thread Mounting Screws (DD) into the holes on the Mounting bracket (EE). Pass Lock Nuts onto the Mounting Screws (DD). Hand tighten until snug.

Figure 2

STEP 3 - Attach Mounting bracket to Outlet Box

A. Pass the supply wires through the Mounting bracket (EE). Attach the Mounting bracket (EE) to the Outlet Box with the head of the Green Ground Screw ready you. Secure it with Outlet Box Screws (CC). Tighten until snug.

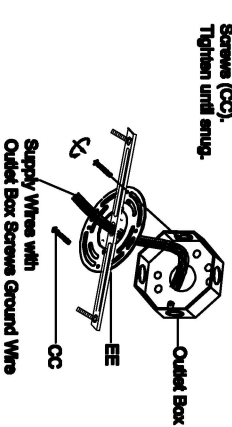


Figure 3

STEP 4 - Fit Ceiling Canopy to Mounting bracket Assembly
 A. Fit the ceiling canopy to Mounting Screw (DD) and secure with Cap nut (AA). Note: The ceiling canopy should be snug against the ceiling and the Mounting Bulb (AA). If not, adjust the length of the Mounting Screws (DD) by unscrewing the Hex Nut and Lock Washer and then screwing Mounting Screws (DD) in or out of the Mounting bracket (EE) until the correct length is achieved. Once the ceiling canopy is secure, remove the Cap nut (AA) and ceiling canopy and proceed to Step 5.

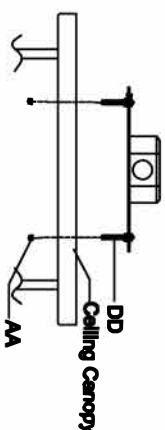


Figure 4

STEP 5 - Wire Connections

A. Use standard wire connectors to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

White wire from outlet box
 White wire from fixture
 Black wire from fixture
 Black wire from outlet box (or Red)

Bar, or Green Ground wire from outlet box
 Ground wire from fixture
 Bar, or Green Ground wire from outlet box
 Ground wire from fixture
 Green Ground Screw on the Connector

Figure 5

STEP 6 - Install Ceiling Canopy to Ceiling
 A. Carefully tuck all wires into the outlet box and position the ceiling canopy of the Fixture Body (A) over the outlet box. Align the holes in the ceiling canopy with the Mounting Screws (DD). Secure with Cap nut (AA) and hand tighten until snug.

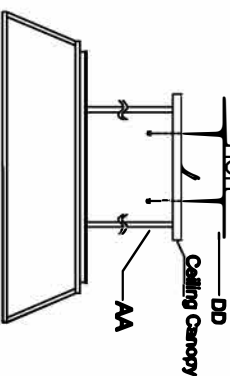


Figure 6

STEP 7 - Install Glass Sheet

A. Please fix part (1) with part (2)

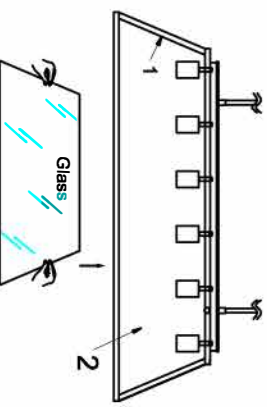


Figure 7

STEP 8 - Install Bulbs.

A. Install bulbs (Not include) onto sockets and push snug into place.

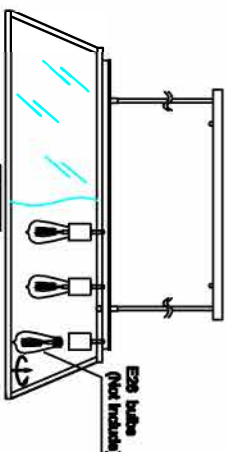


Figure 8