

Date:	Fixture:
Qty:	Client/ Project:



Airflex High Bay

FEATURES

- Steel construction
- High gloss white finish
- 2 and 4 foot length options
- Dry and damp rated
- Commercial, industrial applications



**10 Year
Warranty**

SPECIFICATIONS

Efficacy:

2': Up to 138 Lm/W
4': Up to 157 Lm/W

CRI:

83

Color Temperature:

4000K, 5000K

Lumen Maintenance:

200,000+ Life Hours (L70)

Voltage:

120/277V | 347/480V

Control Options:

0-10V Dimming

Operating Temperature:

-20°C to +55°C

Mounting Options:

Suspended (V Clips)

Wiring Options:

Black, White Flexible Cord

Accessories:

Occupancy Sensor, Bi-Level Dimming,
10kV Surge Protection

OUTPUT PERFORMANCE

Model	Watts	Lm/W	Delivered Lumens
Airflex 2 80	80	144	11331
Airflex 2 110	105	142	14910
Airflex 2 135	135	146.5	19837

Model	Watts	Lm/W	Delivered Lumens
Airflex 4 80	80	156.7	12,348
Airflex 4 110	105	151	15,845
Airflex 4 135	135	147	19,854
Airflex 4 160	160	142.5	22,940
Airflex 4 190	190	145	27,550
Airflex 4 240	240	142.5	34,411
Airflex 4 320	320	142.5	45,881
Airflex 4 400	400	142.5	57,352
Airflex 4 480	480	142.5	68,822

Note: Not all products are qualified on the DLC QPL.

To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.

delviro energy



94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018



Specifications subject to change without notice.

DIMENSIONS

Airflex 2

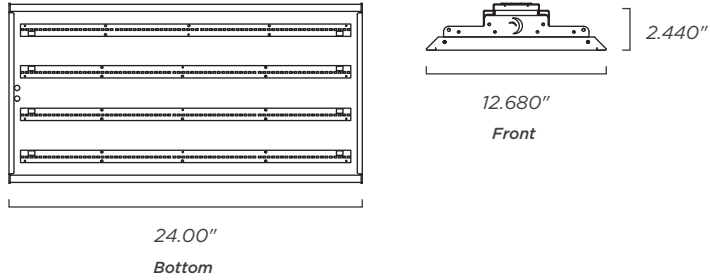


Airflex 4

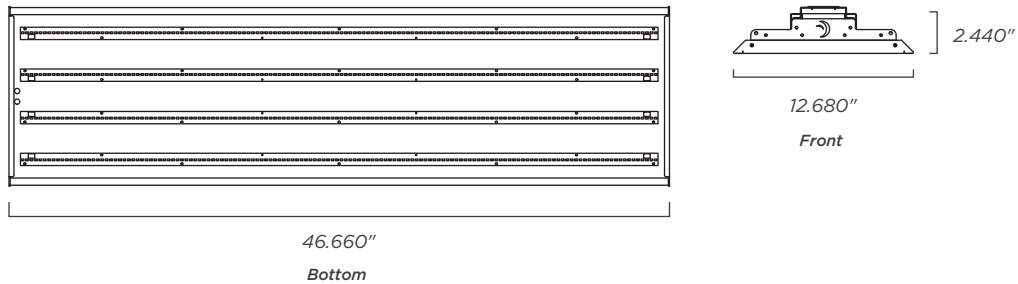


DIMENSIONS


Airflex 4 - 320W

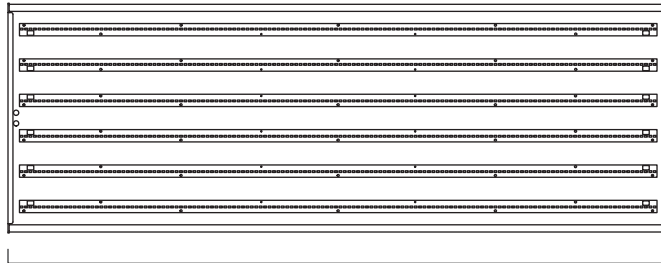

46.660"
Bottom




18.7"
Front




Side

3.250"


Airflex 4 - 400W, 480W

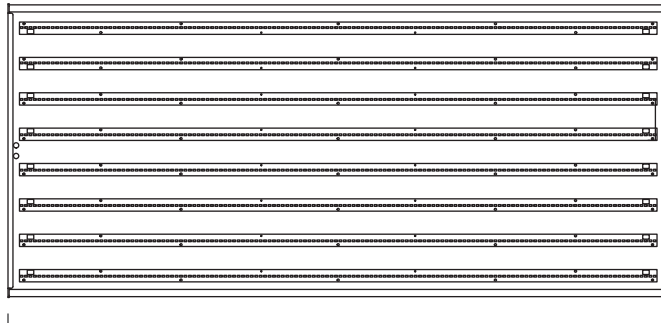

46.660"
Bottom

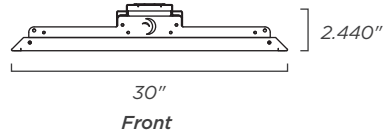

30"
Front



Side

3.250"

ORDERING GUIDE

MODEL	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
Airflex 2	80, 110, 135	4K 4000K 5K 5000K	U 120/277V H 347/480V	NL No Lens Standard FR Frosted CL Clear	WH White	V V Clips
Airflex 4	80, 110, 135, 160, 240, 190 320, 400, 480				WH	V

WIRING	ACCESSORIES	PLUG
BFC Black Flexible Cord WFC White Flexible Cord	N None OCC Occupancy Sensor (on/off) BLD Bi Level Dimming (100%/10%) 10kV 10kV Surge Protection	N None *See Plug Options

PLUG OPTIONS

5-15P - 125V 15A T-Slot Plug
L5-15P - 125V 15A Locking Plug
5-20P - 125V AC 20A T-Slot Plug
L5-20P - 125V 20A Locking Plug
6-15P - 250V AC 15A 3W/2P Plug NEMA 6-15
L6-15P - 250V 15A Locking Plug
6-20P - 250V AC 20A Plug
L6-20P - 250V 20A Locking Plug
7-15P - 277V 15A 3W/2P NEMA 7-15 Plug
L7-15P - 277V 15A Locking Plug
7-20P - 277V AC 20A Plug
L7-20P - 277V 20A Locking Plug
24-20P - 347V AV 20A 3W/2P Plug NEMA 24-20
L24-20P - 347V 20A Locking Plug
24-15P - 347V AC 15A 3W/2 Plug NEMA 24-15