

Date:	Fixture:
Qty:	Client/ Project:



## Airflex C

### High Bay

#### FEATURES

- Steel construction
- High gloss white finish
- 2 and 4 foot length options
- Dry and damp rated
- Commercial, industrial applications



**10 Year**  
Warranty

EMI Compliance: FCC Part 15 Class A

#### SPECIFICATIONS

**Efficacy:**

2': Up to 181 Lm/W  
4': Up to 195 Lm/W

**CRI:**

83

**Color Temperature:**

4000K, 5000K

**Lumen Maintenance:**

200,000+ Life Hours (L70)

**Voltage:**

120/277V | 347/480V

**Control Options:**

0-10V Dimming

**Operating Temperature:**

-20°C to +55°C

**Mounting Options:**

Suspended (V Clips)

**Wiring Options:**

Black, White Flexible Cord

**Accessories:**

Occupancy Sensor, Bi-Level Dimming,  
10kV Surge Protection

#### OUTPUT PERFORMANCE

Model	Watts	Lm/W	Delivered Lumens	Model	Watts	Lm/W	Delivered Lumens
Airflex 2 80c	76	181	13756	Airflex 4 80c	74	195	14551
Airflex 2 95c	90.5	178	16122	Airflex 4 110c	105	181	18909
Airflex 2 110c	105	178	18690	Airflex 4 135c	128	181	23206
Airflex 2 135c	128	176	22528	Airflex 4 160c	154	174	26830
				Airflex 4 190c	183	174	31861
				Airflex 4 240c	234	166	39110
				Airflex 4 320c	315	164	51473
				Airflex 4 400c	394	163	64090
				Airflex 4 480c	473	162	76705
				Airflex 4 600c	600	162	97200

*Airflex 4 600c - not DLC Listed*

**Note:** Not all products are qualified on the DLC QPL.

To view our DLC qualified products, please consult the DLC qualified products list at [www.designlights.org/qpl](http://www.designlights.org/qpl).

**delviro energy**



94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | [info@delviro.com](mailto:info@delviro.com) | [www.delviro.com](http://www.delviro.com)

© delviro energy 2018



Specifications subject to change without notice.

## DIMENSIONS

### Airflex 2

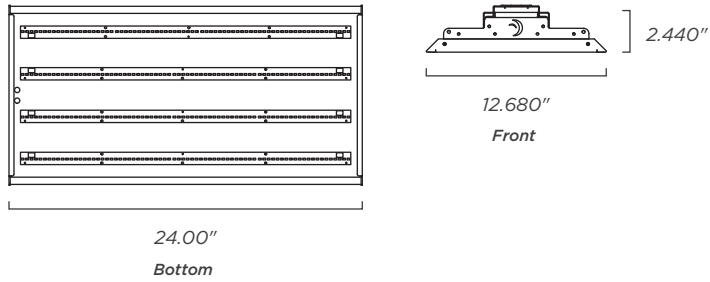


### Airflex 4

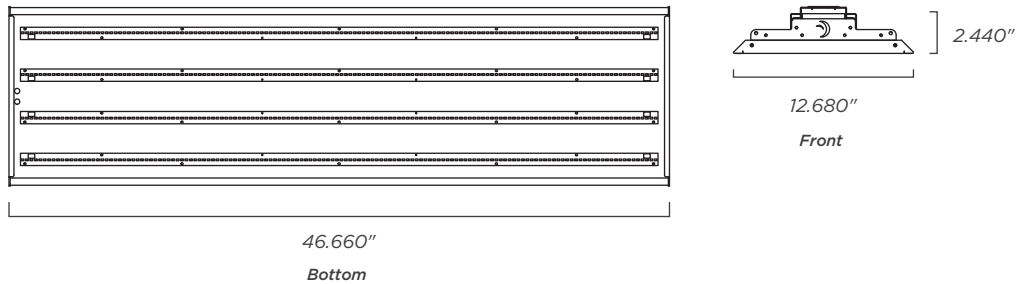


**DIMENSIONS**


**Airflex 4 - 320W**

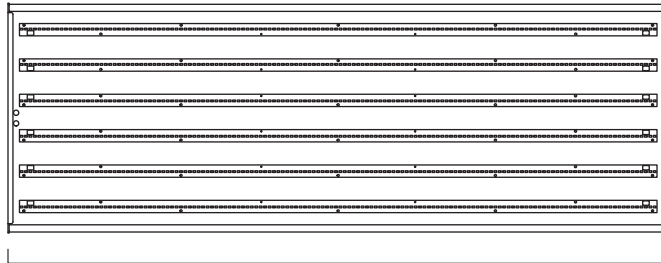

46.660"  
*Bottom*

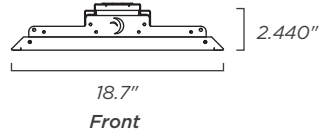


18.7"  
*Front*




*Side*


**Airflex 4 - 400W, 480W, 600W**

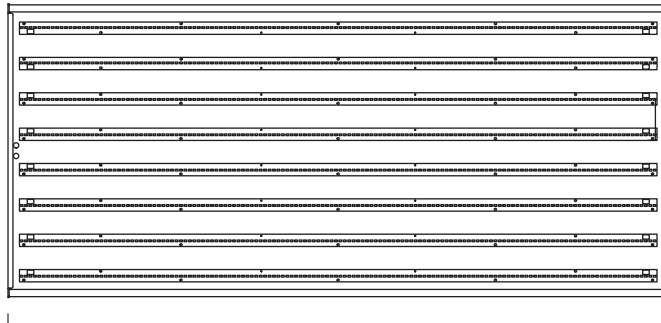

46.660"  
*Bottom*

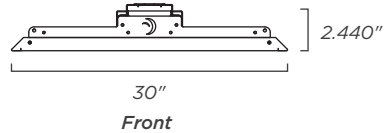

30"  
*Front*



*Side*

## ORDERING GUIDE

MODEL	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
<b>Airflex 2</b>	<b>80c, 95c, 110c, 135c</b>	<b>4K</b> 4000K <b>5K</b> 5000K	<b>U</b> 120/277V <b>H</b> 347/480V	<b>NL</b> No Lens Standard <b>FR</b> Frosted <b>CL</b> Clear	<b>WH</b> White	<b>V</b> V Clips
<b>Airflex 4</b>	<b>80c, 110c, 135c, 160c, 240c, 190c 320c, 400c, 480c 600c</b>				<b>WH</b>	<b>V</b>

WIRING	ACCESSORIES	PLUG
<b>BFC</b> Black Flexible Cord <b>WFC</b> White Flexible Cord	<b>N</b> None <b>OCC</b> Occupancy Sensor (on/off) <b>BLD</b> Bi Level Dimming (100%/10%) <b>10kV</b> 10kV Surge Protection	<b>N</b> None <b>•See Plug Options</b>

## PLUG OPTIONS

**5-15P** - 125V 15A T-Slot Plug  
**L5-15P** - 125V 15A Locking Plug  
**5-20P** - 125V AC 20A T-Slot Plug  
**L5-20P** - 125V 20A Locking Plug  
**6-15P** - 250V AC 15A 3W/2P Plug NEMA 6-15  
**L6-15P** - 250V 15A Locking Plug  
**6-20P** - 250V AC 20A Plug  
**L6-20P** - 250V 20A Locking Plug  
**7-15P** - 277V 15A 3W/2P NEMA 7-15 Plug  
**L7-15P** - 277V 15A Locking Plug  
**7-20P** - 277V AC 20A Plug  
**L7-20P** - 277V 20A Locking Plug  
**24-20P** - 347V AV 20A 3W/2P Plug NEMA 24-20  
**L24-20P** - 347V 20A Locking Plug  
**24-15P** - 347V AC 15A 3W/2 Plug NEMA 24-15