

Date:	Fixture:
Qty:	Client/ Project:



VTS C

Vapor Tight Fixture

FEATURES

- 4 and 8 foot length options
- Enclosed and gasketed body protects electronics from harsh weather elements
- Moisture, Vapor, Chemical Resistant, Corrosion Free
- Dust and Moisture protective
- Frosted and Clear lens options
- IP 65
- IP 67
- NFS Available



10 Year
Warranty

SPECIFICATIONS

Efficacy:

4': Up to 155 Lm/W | 8': Up to 152 Lm/W

CRI:

85

Color Temperature:

3000K, 3500K, 4000K, 5000K

Lumen Maintenance:

200,000+ Life Hours (L70)

Watts:

4': 30W, 40W, 60W, 80W

8': 40W, 60W, 80W, 120W

Voltage:

120/277V | 347/480V

Control Options:

0-10V Dimming

Operating Temperature:

-40°C to +40°C

+55°C - option available

Mounting Options:

Suspended

Wiring Options:

Black Flexible Cord

White Flexible Cord

Accessories:

Occupancy Sensor (waterproof option available), Bi-Level Dimming (waterproof option available), Photo Control, 10kV Surge Protection

OUTPUT PERFORMANCE

Model	Input Watts	Lm/W	Delivered Lumens
VT4s 30c	29.4	155	4650
VT4s 40c	39.5	152	6080
VT4s 60c	59.6	150	9000
VT4s 80c	83.9	139	11120

VT4s - 4' Vapor Tight

Model	Input Watts	Lm/W	Delivered Lumens
VT8s 40c	37	150	5550
VT8s 60c	56	148	8288
VT8s 80c	79	152	12160
VT8s 120c	115	150	18000

VT8s - 4' Vapor Tight

Note: Not all products are qualified on the DLC QPL.

To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.

delviro energy


94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018


Specifications subject to change without notice.

DIMENSIONS


Vapor Tight 4s

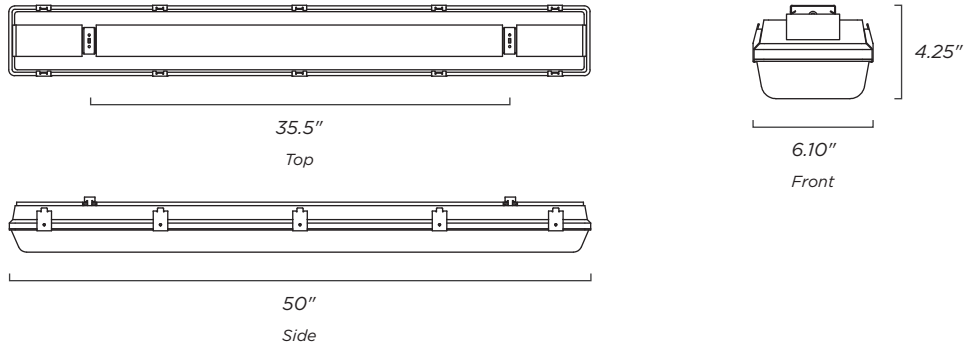

Vapor Tight 8s

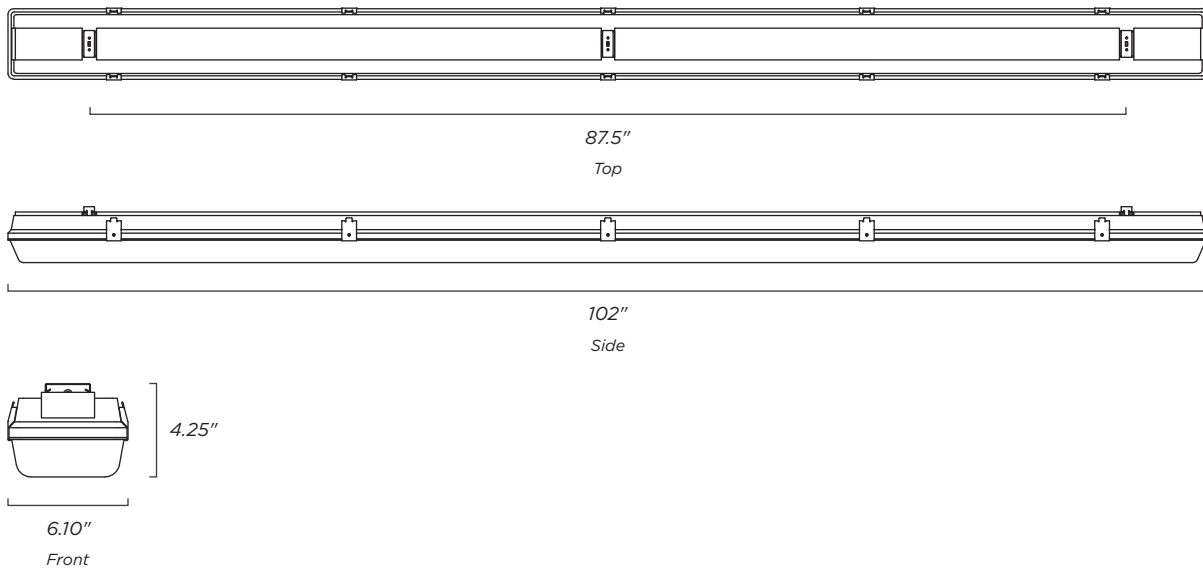

STANDARD MOUNTING BRACKET

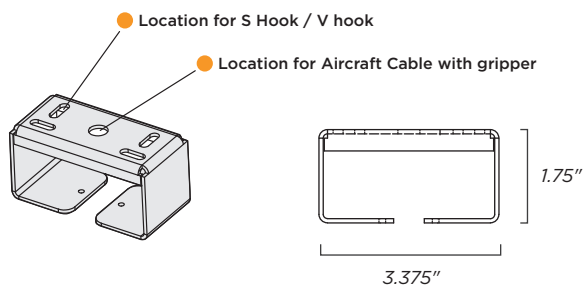

delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.

ORDERING GUIDE

MODEL	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
VT4S	30c, 40c, 60c, 80c	3K 3000K	U 120/277V	*FR Frosted	GRY Grey	AC Aircraft Cable
VT8S	40c, 60c, 80c, 120c	35K 3500K	H 347V	CL Clear	CU Custom	V V Hooks
		4K 4000K				
		5K 5000K				

WIRING	ACCESSORIES	PLUG
BFC Black Flexible Cord	N None	N None
WFC White Flexible Cord	OCC Occupancy Sensor (on/off)	*See Plug Options
	BLD Bi Level Dimming (100%/10%)	
	WBD Waterproof Bi-Level Dimming (100%/10%)	
	WOC Waterproof Occupancy Sensor (on/off)	
	PC Photo Control	
	HT High Temperature +55°C	
	10kV 10kV Surge Protection	

NOTE

FR - Frosted lens for VT4S model only
CU - Custom finishes - Please contact factory
PC - Photo Control - Please specify voltage (120V, 208-277V, 347V, 480V)
HT - High Temperature +55°C - Specify if dimming required - Please consult factory

PLUG OPTIONS

5-15P - 125V 15A T-Slot Plug
L5-15P - 125V 15A Locking Plug
5-20P - 125V AC 20A T-Slot Plug
L5-20P - 125V 20A Locking Plug
6-15P - 250V AC 15A 3W/2P Plug NEMA 6-15
L6-15P - 250V 15A Locking Plug
6-20P - 250V AC 20A Plug
L6-20P - 250V 20A Locking Plug
7-15P - 277V 15A 3W/2P NEMA 7-15 Plug
L7-15P - 277V 15A Locking Plug
7-20P - 277V AC 20A Plug
L7-20P - 277V 20A Locking Plug
24-20P - 347V AV 20A 3W/2P Plug NEMA 24-20
L24-20P - 347V 20A Locking Plug
24-15P - 347V AC 15A 3W/2 Plug NEMA 24-15