

Date:	Fixture:
Qty:	Client/ Project:



# Zip Light

## Linear Square

### FEATURES

- Frosted acrylic lens shields the LEDs from direct view
- Wall mountable option
- Screw in LED pan single ground screw for easy installation
- Enclosed lens prevents penetration of dust, insects, and other debris into the lamp compartment
- Glass free polycarbonate shatter-proof lens safe for food plants
- Dry and Damp rated
- 2, 4, 8 foot length options



### SPECIFICATIONS

<b>Efficacy:</b> Zip 2: Up to 135 Lm/W   Zip 4: Up to 140 Lm/W   Zip 8: Up to 156 Lm/W	<b>Voltage:</b> 120/277V   347V	<b>Wiring Options:</b> Black Flexible Cord White Flexible Cord
<b>CRI:</b> 86	<b>Control Options:</b> 0-10V Dimming	<b>Accessories:</b> Occupancy Sensor, Ultrasonic BLD sensor, Battery Backup, Bi Level Dimming, 5 min 50% Sensor, Emergency Backup, 10kV Surge Protection
<b>Color Temperature:</b> 3000K, 3500K, 4000K, 5000K	<b>Operating Temperature:</b> -30°C to +45°C	
<b>Lumen Maintenance:</b> 200,000+ Life Hours (L70)	<b>Mounting Options:</b> Suspended, Flush Mount	

### OUTPUT PERFORMANCE

Model	Input Watts	Lm/W	Delivered Lumens
Zip 2 15	13.65	134.5	1836
Zip 2 20	22.1	135.1	2999
Zip 2 30	30.67	135.7	4161

Model	Input Watts	Lm/W	Delivered Lumens
Zip 4 15	15	140	1766
Zip 4 20	20.3	140	2885
Zip 4 30	29.8	140	4003
Zip 4 40	41.6	140	5378
Zip 4 60	59.7	140	8272
Zip 4 80	77.0	140	10965
Zip 4 100*	97.8	139	13659

Model	Input Watts	Lm/W	Delivered Lumens
Zip 8 40	38	156	5911
Zip 8 60	57	156	8765
Zip 8 80	75	155	11602
Zip 8 100*	99.2	155	15400
Zip 8 120	116	152	17830




**Note:** Zip 8 100 - 120/277V

**Note:** Zip 4 100 - 120/277V

**Note:** Not all products are qualified on the DLC QPL.  
 To view our DLC qualified products, please consult the DLC qualified products list at [www.designlights.org/qpl](http://www.designlights.org/qpl).

## DIMENSIONS

---

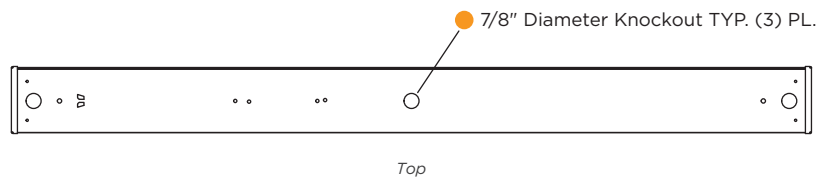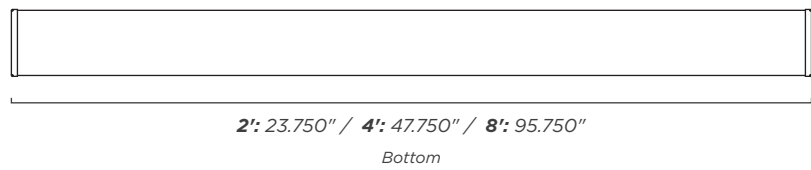

## ORDERING GUIDE

MODEL	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
Zip 2	15, 20, 30	3K 3000K	U 120/277V	FR Frosted	WH White	FM Flush Mount
Zip 4	15, 20, 30, 40, 60, 80, 100	35K 3500K 4K 4000K 5K 5000K	H 347V	CL Clear		V V Hook
Zip 8	40, 60, 80, 100, 120				WH	

WIRING	ACCESSORIES	TYPE	PLUG
<b>BFC</b> Black Flexible Cord <b>WFC</b> White Flexible Cord	<b>N</b> None <b>OCC</b> Occupancy Sensor (on/off) <b>UOCC</b> Ultrasonic BLD Sensor <b>BAT</b> Battery Backup <b>BLD</b> Bi Level Dimming (100%/10%) - Programmable <b>DELBLD</b> 5 Min 50% Delviro Sensor <b>EM</b> Emergency Battery <b>10kV</b> 10kV Surge Protection	<b>SQ</b> Square	<b>N</b> None <b>*See Plug Options</b>
		SQ	

### NOTE

**BAT** - Battery Backup limited to 120/277V

### PLUG OPTIONS

**5-15P** - 125V 15A T-Slot Plug  
**L5-15P** - 125V 15A Locking Plug  
**5-20P** - 125V AC 20A T-Slot Plug  
**L5-20P** - 125V 20A Locking Plug  
**6-15P** - 250V AC 15A 3W/2P Plug NEMA 6-15  
**L6-15P** - 250V 15A Locking Plug  
**6-20P** - 250V AC 20A Plug  
**L6-20P** - 250V 20A Locking Plug  
**7-15P** - 277V 15A 3W/2P NEMA 7-15 Plug  
**L7-15P** - 277V 15A Locking Plug  
**7-20P** - 277V AC 20A Plug  
**L7-20P** - 277V 20A Locking Plug  
**24-20P** - 347V AV 20A 3W/2P Plug NEMA 24-20  
**L24-20P** - 347V 20A Locking Plug  
**24-15P** - 347V AC 15A 3W/2 Plug NEMA 24-15