

Date:	Fixture:
Qty:	Client/ Project:



Zip Light

Linear

FEATURES

- Frosted acrylic lens shields the LEDs from direct view
- Wall mountable option
- Screw in LED pan single ground screw for easy installation
- Enclosed lens prevents penetration of dust, insects, and other debris into the lamp compartment
- Glass free polycarbonate shatter-proof lens safe for food plants
- Dry and Damp rated
- 2, 4, 8 foot length options



10 Year
Warranty

SPECIFICATIONS

Efficacy:

Up to 156 Lm/W

CRI:

86

Color Temperature:

3000K, 3500K, 4000K, 5000K

Lumen Maintenance:

200,000+ Life Hours (L70)

Voltage:

120/277V | 347V

Control Options:

0-10V Dimming

Operating Temperature:

-30°C to +45°C

Mounting Options:

Suspended, Flush Mount

Wiring Options:

Black Flexible Cord
White Flexible Cord

Accessories:

Occupancy Sensor, Ultrasonic BLD sensor,
Battery Backup, Bi Level Dimming,
5 min 50% Sensor, Emergency Backup,
10kV Surge Protection

OUTPUT PERFORMANCE

Model	Input Watts	Lm/W	Delivered Lumens
Zip 2 15	13.65	134.5	1836
Zip 2 20	22.1	135.1	2999
Zip 2 30	30.67	135.7	4161

Model	Input Watts	Lm/W	Delivered Lumens
Zip 4 15	15	140	1766
Zip 4 20	20.3	140	2885
Zip 4 30	29.8	140	4003
Zip 4 40	41.6	140	5378
Zip 4 60	59.7	140	8272
Zip 4 80	77.0	140	10965
Zip 4 100*	97.8	139	13659

Note: Zip 4 100 - 120/277V

Model	Input Watts	Lm/W	Delivered Lumens
Zip 8 40	38	156	5911
Zip 8 60	57	156	8765
Zip 8 80	75	155	11602
Zip 8 100*	99.2	155	15400
Zip 8 120	116	152	17830

Note: Zip 8 100 - 120/277V

Note: Not all products are qualified on the DLC QPL.

To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.


delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.

DISTRIBUTION






CANDLE POWER SUMMARY

ALONG	22.5	45	67.5	ACROSS	OUTPUT LUMENS	ANGLE	ZONE	LUMENS	% LAMP	% LUMINAIRE
1575	1575	1575	1575	1575		0	0 - 30	1200	27.07	27.07
1560	1568	1562	1570	1576	151	5	0 - 40	1930	43.55	43.55
1485	1498	1499	1507	1516	422	15	0 - 60	3296	74.36	74.36
1336	1350	1365	1380	1390	637	25	0 - 90	4291	96.80	96.80
1125	1144	1174	1198	1209	731	35	40 - 90	2361	53.26	53.26
877	903	952	990	1003	729	45	60 - 90	994	22.44	22.44
624	657	732	770	785	637	55	90 - 180	141	3.20	3.20
392	430	504	559	557	490	65	0 - 180	4434	100.00	100.00
199	240	317	373	391	325	75				
52	98	175	229	245	179	85				
0	51	122	172	187	83	90				
0	22	80	125	139	35	95				
0	3	31	60	71	14	105				
0	1	11	27	33	6	115				
0	0	5	13	16	2	125				
0	0	2	6	7	1	135				
0	0	0	3	3	0	145				
0	0	0	0	0	0	155				
0	0	0	0	0	0	165				
0	0	0	0	0	0	175				
0	0	0	0	0	0	180				

ELECTRICAL CONSUMPTION

- Input Voltage: 120 VRMS
- Input Voltage: 0.328 ARMS
- Input Wattage: 38.92
- Power Factor: 0.989

DIMENSIONS

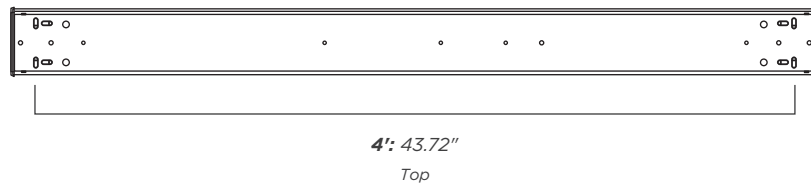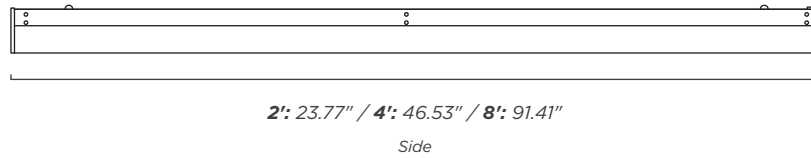

ORDERING GUIDE

MODEL	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
Zip 2	15, 20, 30	3K 3000K	U 120/277V	FR Frosted	WH White	FM Flush Mount
Zip 4	15, 20, 30, 40, 60, 80, 100	35K 3500K 4K 4000K 5K 5000K	H 347V	CL Clear		V V Hook
Zip 8	40, 60, 80, 100, 120				WH	

WIRING	ACCESSORIES	PLUG
BFC Black Flexible Cord WFC White Flexible Cord	N None OCC Occupancy Sensor (on/off) UOCC Ultrasonic BLD Sensor BAT Battery Backup BLD Bi Level Dimming (100%/10%) - Programmable DELBLD 5 Min 50% Delviro Sensor EM Emergency Battery 10kV 10kV Surge Protection	N None *See Plug Options

NOTE

BAT - Battery Backup limited to 120/277V

PLUG OPTIONS

5-15P - 125V 15A T-Slot Plug
L5-15P - 125V 15A Locking Plug
5-20P - 125V AC 20A T-Slot Plug
L5-20P - 125V 20A Locking Plug
6-15P - 250V AC 15A 3W/2P Plug NEMA 6-15
L6-15P - 250V 15A Locking Plug
6-20P - 250V AC 20A Plug
L6-20P - 250V 20A Locking Plug
7-15P - 277V 15A 3W/2P NEMA 7-15 Plug
L7-15P - 277V 15A Locking Plug
7-20P - 277V AC 20A Plug
L7-20P - 277V 20A Locking Plug
24-20P - 347V AV 20A 3W/2P Plug NEMA 24-20
L24-20P - 347V 20A Locking Plug
24-15P - 347V AC 15A 3W/2 Plug NEMA 24-15