



Zoom
High Bay 16

Date:	Fixture:
Qty:	Client/ Project:



Zoom

High Bay 16

FEATURES

- Aluminum construction
- White finish
- Custom finishes available
- Aluminum and acrylic reflector options
- Retail applications
- Industrial and commercial application



SPECIFICATIONS

Efficacy:

Up to 138 Lm/W

CRI:

86 | 93 Available

Color Temperature:

3000K, 3500K, 4000K, 5000K

Lumen Maintenance:

150,000+ Life Hours (L70)

Voltage:

120/277V | 347/480V

Control Options:

0-10V Dimming

Operating Temperature:

-20°C to +40°C

Mounting Options:

Suspended (Hook)


Wiring Options:

Black and White Flexible Cord,

OUTPUT PERFORMANCE

Models	Input Watts	Lm/W	Delivered Lumens
Zoom 70	75.6	138.1	10,709
Zoom 90	87.4	132.9	11,617
Zoom 120	120.1	114.7	15,405
Zoom 150	152.3	122.9	18,722
Zoom 180	178.7	121.0	21,623
Zoom 195	199.8	119.7	23,911

DIMENSIONS

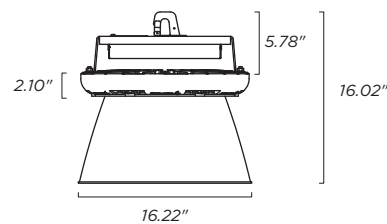

Note: Not all products are qualified on the DLC QPL.

To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.

delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.

ORDERING GUIDE

MODEL	WATTS	COLOR TEMP	VOLTAGE	DOME TYPE	FINISH	MOUNTING
Zoom	70	3K 3000K	U 120/277V	16AC 16" Clear Acrylic	WH White	H Hook
	90	35K 3500K	H 347/480V	16AL 16" Aluminum	CU Custom	
	120	4K 4000K		Reflector		
	150	5K 5000K				
	180					
195						
Zoom						H

WIRING	ACCESSORIES	LENS	CRI
BFC Black Flexible Cord	N None	NL No Lens	ST Standard
WFC White Flexible Cord	D Dimming Wire Accessible	CLD Clear Diffused	HD High Definition
	10kV 10kV Surge Protection		
	DIMOFF 0-10 1% Dim to off Driver		

NOTE

CU - Please consult factory