



## **Zoom**

High Bay

**delviro energy**

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | [info@delviro.com](mailto:info@delviro.com)

[www.delviro.com](http://www.delviro.com)

Date:	Fixture:
Qty:	Client/ Project:



## Zoom

### High Bay

#### FEATURES

- Retail, Industrial, Commercial applications
- Aluminum construction
- Aluminum and acrylic reflector options



**10 Year**  
Warranty

#### SPECIFICATIONS

**Efficacy:**

Up to 138 Lm/W

**CRI:**

80

**Color Temperature:**

3000K, 3500K, 4000K, 5000K

**Lumen Maintenance:**

150,000+ Life Hours (L70)

**Voltage:**

120/277V | 347/480V

**Control Options:**

0-10V Dimming

**Operating Temperature:**

-20°C to +40°C

**Mounting Options:**

Hook, Diecast Mounting Plate,  
Custom Options Available


**Wiring Options:**

Black and White Flexible Cord,

#### OUTPUT PERFORMANCE

Models	Input Watts	Lm/W	Delivered Lumens
Zoom 70	77.6	138.1	10,709
Zoom 90	87.4	132.9	11,617
Zoom 120	120.8	130	15,704
Zoom 150	150	130	19,500

#### PHOTOMETRICS

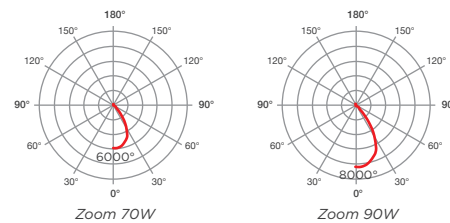

**Note:** Not all products are qualified on the DLC QPL.

To view our DLC qualified products, please consult the DLC qualified products list at [www.designlights.org/qpl](http://www.designlights.org/qpl).


**delviro energy**

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | [info@delviro.com](mailto:info@delviro.com) | [www.delviro.com](http://www.delviro.com)

© delviro energy 2018

Specifications subject to change without notice.

## ORDERING GUIDE

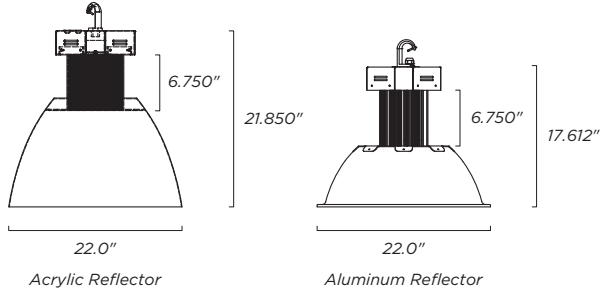

## ORDERING GUIDE

MODEL	WATTS	COLOR TEMP	VOLTAGE	DOME TYPE	FINISH	MOUNTING
<b>Zoom</b>	<b>70</b>	<b>3K</b> 3000K	<b>U</b> 120/277V	<b>22AC</b> 22" Acrylic	<b>ALUM</b> Aluminum	<b>H</b> Hook
	<b>90</b>	<b>35K</b> 3500K	<b>H</b> 347/480V	<b>22AL</b> 22" Aluminum		<b>1/2 NPT</b> Diecast Mounting Plate w/ 1/2" NPT
	<b>120</b>	<b>4K</b> 4000K			<b>3/4 NPT</b> Diecast Mounting Plate w/ 3/4" NPT	
	<b>150</b>	<b>5K</b> 5000K			<b>CU</b> Custom	

<b>ZOOM</b>					<b>ALUM</b>	
-------------	--	--	--	--	-------------	--

WIRING	ACCESSORIES	LENS
<b>BFC</b> Black Flexible Cord	<b>N</b> None	<b>NL</b> No Lens
<b>WFC</b> White Flexible Cord	<b>DI</b> Dimming Wire Accessible	<b>CLD</b> Clear Diffused
	<b>10kV</b> 10kV Surge Protection	
	<b>DIMOFF</b> 0-10 1% Dim to off Driver	

--	--	--	--