

SPECIFICATION SHEET

SUBJECT

LED CEILING LIGHT

CUSTOMER PROJECT

Project: _____
 Type: _____
 Cat. No.: _____

 Qty: _____
 Date: _____
 EEL Rep: _____



solutions closer to nature

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

DESCRIPTION

EEL LED Flush Mount Ceiling Light Fixture features a painted white finish and a white acrylic diffuser. This LED Ceiling Light is perfect for commercial and residential applications.

The LED Flush Mount Ceiling Light is ideal for hallways, kitchens, bedrooms and other applications.



LED CEILING LIGHTS
11 inch and 14 inch

SPECIFICATION FEATURES

Construction

Flush mount steel housing painted white, white acrylic lens
 2 sizes: 11-inch and 14-inch
 Rounded or straight edge profile

Electrical

Long life LED system complete with electrical driver to deliver the optimal performance
 LED's available in 3000K with typical CRI: 80
 Dimmable
 Ambient temperature -40°C to 40°C
 LED modules rated for 50,000 hours
 Electronic drivers are available in 120 or 120/277 volt applications

Driver and Module Access

Driver and modules can be accessed by turning the lens, no tools required

Mounting

Surface Mount

Finish

Galvanized steel for durability and a powdered high gloss paint finish

Shielding


White acrylic diffuser

Compliance


cULus (CL-T6113 & CL-T6213)
 cETLus & Energy Star (CL-A6111 & CL-A6211)

Warranty


5 years




CL-A6111-6-LED02
Dimensions
 mm | 279(D) x 95(H)
 inch | 11(D) x 3.8(H)

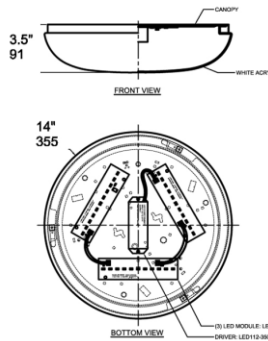

CL-T6113-6-LED03
Dimensions
 mm | 356(W) x 89(H)
 inch | 14(W) x 3.5(H)

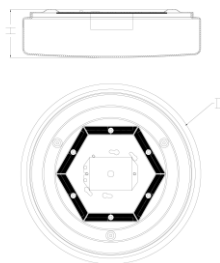



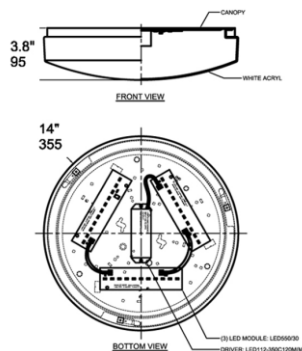





CL-A6211-6-LED02
Dimensions
 mm | 279(D) x 76(H)
 inch | 11(D) x 3(H)



CL-T6213-6-LED03
Dimensions
 mm | 356(W) x 97(H)
 inch | 14(W) x 3.8(H)





	Model No.	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	Colour Temp. (K)	Efficacy (lm/W)	Certification	Type
	CL-A6111-6-LED02 11 inch Round Edge Dimmable	1150	15	120	3000K	77		Standard
	CL-T6113-6-LED03 14 inch Round Edge - End of Life -	1106	14	120-277	3000K	79		
	CL-A6211-6-LED02 11 inch Straight Edge Dimmable	1150	15	120	3000K	77		Special Order
	CL-T6213-6-LED03 14 inch Straight Edge - End of Life -	1148	14	120-277	3000K	82		

NOTE:
Lumens are Estimated

OPTIONAL ACCESSORIES:

ULT - HC419S | On-Off Sensor Control | 120M (applies to CLA6111/ CLA6211 only)
ULT - HC419V | Tri-level Dimming Control | 120M

