

SPECIFICATION SHEET

SUBJECT

EMERGENCY BATTERY PACK

CUSTOMER PROJECT

Project: _____
 Type: _____
 Cat. No.: _____
 Qty: _____
 Date: _____
 EEL Rep: _____



solutions closer to nature

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

Electrical Specifications

Output Power (W)	Output Voltage (V)	Output Current (mA)	Operating Duration Time	Battery Voltage (V)	Battery Charge Current (mA)	Battery Charge Time	Input Power (W)	Input Current (mA)	Operating Temp (°C)
8	80-130	60	Min. 90min	6.4	Max. 185	Max. 24Hrs	Max. 4	Max. 60	0-55



EMP-D3045 EMERGENCY BATTERY PACK


EMERGENCY BATTERY PACK

EMP-D3045


Driver Type	Emergency Battery Driver
Output Mode	Constant Current
Input Voltage	120-347 Vac
Input Frequency	50/60 Hz
IP Rating	30
Surge Rating	3kV

Protection: Short circuit protection, overload protection

Wiring Diagram

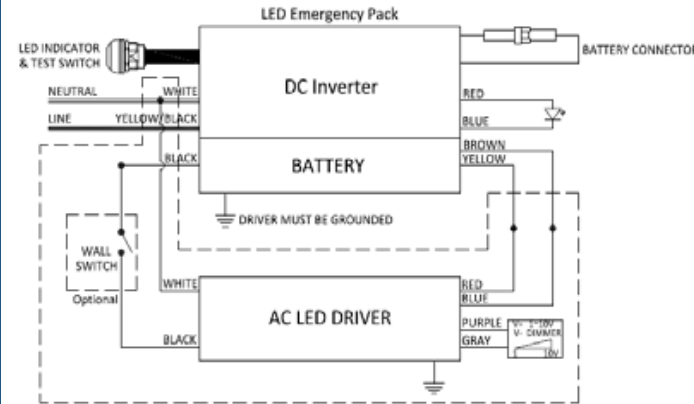


Mounting hole for test switch



Maximum Wiring Distance (at full load) is 18AWG/18Feet

Enclosure

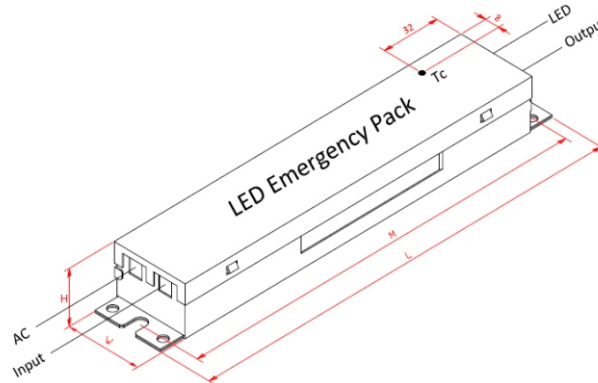

Lead Length	in.	cm.		in.	cm.
Black	5.9	15	Battery Connector	33.07	84
White	22.04	56	Test Switch :ED Indicator	25/6	63.5/15.24
Blue	25.98	66	Brown	32.28	82
Red	25.98	66			
Yellow/Black	19.29	49			
Yellow	32.28	82			

Enclosure	in.	cm.
Length (L)	9.5	24.1
Width (W)	1.7	4.3
Height (H)	1.14	2.9
Mounting (M)	8.9	22.6



www.eelighting.ca

Data is based upon tests performed by Antron Electronics, in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specification are subject to change without notice. All specifications are nominal unless otherwise noted.