

SPECIFICATION SHEET

SUBJECT

LUX RECESSED LIGHT DEEP BAFFLE ACCENT LIGHT

CUSTOMER PROJECT

Project: _____
Type: _____
Cat. No.: _____
Qty: _____
Date: _____
EEL Rep: _____



solutions closer to nature



Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

DESCRIPTION

The 2" Round Recessed LED accent light with Deep Baffle is the perfect solution for generally any ceilings. It also features a regressed design for anti-glare. It is dimmable, IC and air tight rated, suitable for damp locations and Energy Star pending.

SPECIFICATION FEATURES

Construction

Round fixture with integral LEDs. Durable, die cast aluminum trim for optimal heat dissipation
1 size: 2 inch

Controls

Isolated driver factory installed inside connection box

Electrical

Ambient temperature -18°C to 49°C
CRI: 80
120V Triac dimmable
3000K and 4000K
black and white
LED modules rated for greater than 50,000 hours

Mounting

Cut hole in ceiling and snap fixture in opening with attached spring clips

Beam Angle

36°

Finish

White or black finish
Oil based spray painted
Scratch resistant and smooth finish

Compliance


cETLus and Energy Star

Warranty

5 years



LED RECESSED
DEEP BAFFLE
LUX
recessed
ACCENT LIGHT

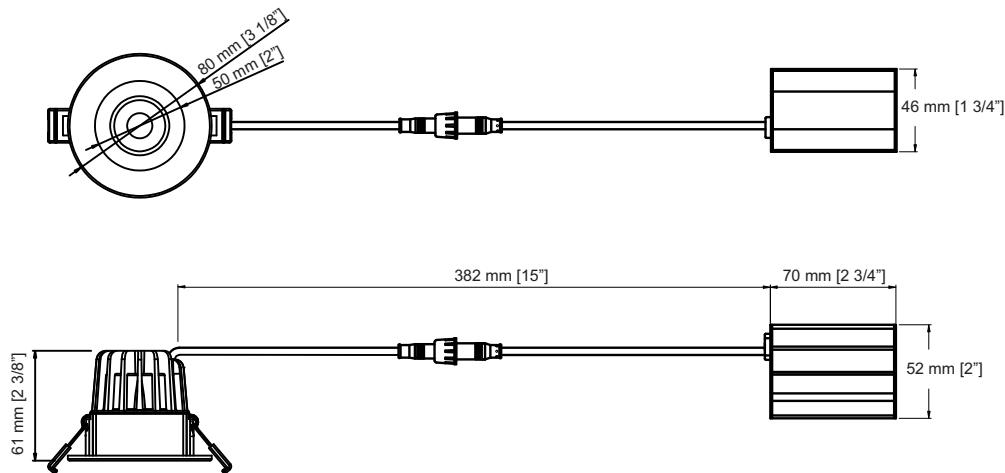

RLALED-2-S8W

Dimensions
OD 3-1/8" (80mm) x ID 2" (50mm)
Cut out 2 1/2" (65mm)
Thickness 2-3/8" (61mm)







www.eelighting.ca

EELSS19W04



ORDERING CODE, ENERGY AND PERFORMANCE DATA

	Model No.	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	Colour Temp. (K)	Certification	Type
	RLALED-2-S8W-3KWH	600	8	120	3000K		Standard
	RLALED-2-S8W-4KWH	680	8	120	4000K		Standard
	RLALED-2-S8W-3KBK	600	8	120	3000K		Standard
	RLALED-2-S8W-4KBK	680	8	120	4000K		Standard

NOTE:

- Lumens are estimated

