

SPECIFICATION SHEET

SUBJECT

LED WALL SCONES

CUSTOMER PROJECT

Project: _____
 Type: _____
 Cat. No.: _____

 Qty: _____
 Date: _____
 EEL Rep: _____



solutions closer to nature

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

DESCRIPTION

The LED Wall Scones Collection from EEL is a work of modern art. It's simple lines, sleek brushed nickel, polished brass finish and bold geometric shapes are contrasted by smooth acrylic and glass shades. This streamlined no-fuss design exemplifies contemporary styling to create a cool clean look.

SPECIFICATION FEATURES

Construction

Brushed nickel and polish brass steel

Electrical

A variety of Lumen options available in 120 or 120-277 Volts
 Ambient temperature -40°C to 40°C
 LED modules rated for 50,000 hours

Driver and Module Access

Drivers are accessible by removing the shade

Mounting

Surface Mount

Finish

Brushed nickel and polish brass




Shielding

Smooth white acrylic and glass

Compliance

Drivers and Modules are UL or ETL recognized components and indoor sconces are cULus or cETLus listed


LED WALL SCONES

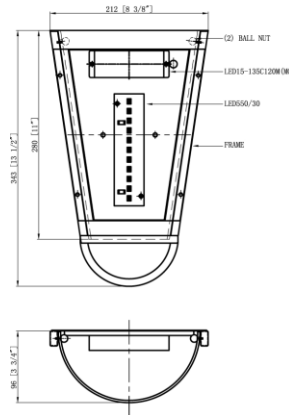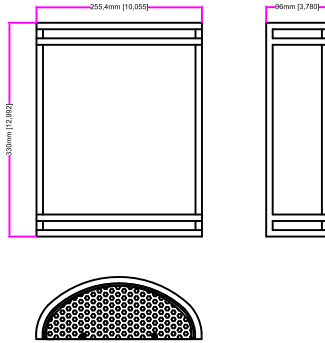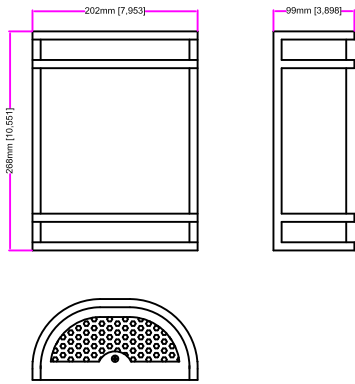


WS-A5422LED02-120 (Triac Dimmable)
Dimension
 mm | 202(W) x 268(L) x 99(D)
 inch | 8(W) x 10.5(L) x 4(D)

WS-A7572LED02-120
Dimension
 mm | 255(W) x 330(L) x 96(D)
 inch | 10(W) x 13(L) x 3.8(D)


WS-T10412ALED01
Dimension
 mm | 212(W) x 343(L) x 104(D)
 inch | 8.4(W) x 13.5(L) x 4.1(D)

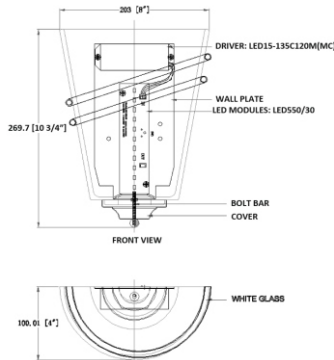

WS-T9806-LED01
Dimension
 mm | 203(W) x 270(L) x 100(D)
 inch | 8(W) x 10.8(L) x 4(D)

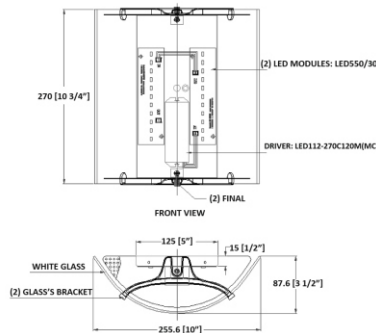











WS-T5464-LED02
Dimension
 mm | 256(W) x 279(L) x 88(D)
 inch | 10(W) x 11(L) x 3.5(D)





ORDERING CODE, ENERGY AND PERFORMANCE DATA

Model No.	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	Colour Temp. (K)	Efficacy (lm/W)	Certification	Type
 <p>WS-A5422-LED02-120 Finish: Brushed Nickel Shade: Smooth White Acrylic 10.5" x 8" x 4" Triac Dimmable</p>	1060	11.5	120	3000K	92		Standard
 <p>WS-T10412LED01 Finish: Brushed Nickel Shade: Etched White Opal Glass 13.5" x 8.35" x 4.1" — End Of Life —</p>	480	6	120 / 120M	3000K	80		Standard
 <p>WS-T9806-LED01 Finish: Polished Brass Shade: White Glass 10.8" x 8" x 4" — End Of Life —</p>	480	6	120 / 120M	3000K	80		Standard
 <p>WS-A7572LED02-120 Finish: Brushed Nickel Shade: White Smooth Acrylic 13" x 10" x 3.8" *Dimmable</p>	2170	23	120	3000K	94		Standard
 <p>WS-T5464-LED02 Finish: Brushed Nickel Shade: White Glass 11" x 10" x 3.5" — End Of Life —</p>	943	11.5	120 / 120M	3000K	82		Standard

NOTE:
Lumens are Estimated

OPTIONAL ACCESSORIES:
ULT - HC419S | On-Off Sensor Control | 120M (except for WS-T10412 / WS-T9806)

