

# LED T5 Direct Fit Replacement Lamps

Electronic Ballast Compatible Tubes



11/25  
watts

50K  
hours

185°  
beam

80+  
CRI

## Features

- Directly replaces T5 fluorescent lamps
- No socket changes
- Operates on most popular electronic programmed start fluorescent T5 ballasts
- No rewiring or modifications of any kind required
- Choice of 3500K, 4000K or 5000K CCT
- Frosted glass lens reduces visual glare
- Environment-friendly, no mercury or lead
- 5 year product warranty



## Performance

- 11W replaces 28W fluorescent
- 25W replaces 54W fluorescent
- 80+ CRI
- R9>20
- Beam Angle: 185°
- THD: <20%
- Power Factor: 0.90
- Rated Lifetime: 50K hours @ L70
- Suitable for use in fixtures where ambient temperature is between -4°F (-20°C) and 113°F (45°C)
- Compatible with select electronic ballasts
- Does not operate on fluorescent battery backup
- Does not operate on magnetic ballasts
- Does not operate on T8 or T12 ballasts
- Does not operate on dimming ballasts
- Refer to ballast compatibility checklist to confirm lamp/ballast system operability
- Contains no mercury or lead; classified as non-hazardous waste

## Applications


- Highbays
- Troffers
- Industrial Strips
- Cove Lighting
- Warehouses
- Stairwells
- Cold Storage



# LED T5 Direct Fit Replacement Lamps

Electronic Ballast Compatible Tubes

## Dimensions

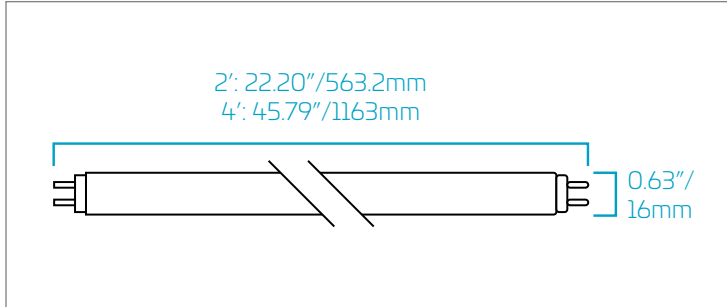

NSF offers the most accepted and trusted certification and verification programs for commercial foodservice equipment, specified by health departments, restaurant buyers and specifiers worldwide. NSF means market access – products with the NSF mark receive guaranteed regulatory acceptance in North America and improved acceptance worldwide. Verification programs, such as HACCP Compliance Verification - EU, demonstrate hygienic quality, independently verified by a trusted source.

## Ordering Information

| Order Code   | Item #                  | Lngh | Lm    | Lamp W | V (Ballast Dependent) | CCT   | CRI | Glass Tube | Bm   | Life/Hrs | Replaces Fluorescent | DLC |
|--------------|-------------------------|------|-------|--------|-----------------------|-------|-----|------------|------|----------|----------------------|-----|
| <b>10128</b> | LED11WT5HO/22/835-G8DR  | 2'   | 1,350 | 11W    | 120-277V              | 3500K | 80+ | Frosted    | 185° | 50K      | 28W                  | ✓   |
| <b>10129</b> | LED11WT5HO/22/840-G8DR  | 2'   | 1,400 | 11W    | 120-277V              | 4000K | 80+ | Frosted    | 185° | 50K      | 28W                  | ✓   |
| <b>10039</b> | LED11WT5HO/22/850-G8DR* | 2'   | 1,400 | 11W    | 120-277V              | 5000K | 80+ | Frosted    | 185° | 50K      | 28W                  | ✓   |
| <b>09928</b> | LED25WT5HO/46/835-G8DR  | 4'   | 3,300 | 25W    | 120-277V              | 3500K | 80+ | Frosted    | 185° | 50K      | 54W                  | ✓   |
| <b>09930</b> | LED25WT5HO/46/840-G8DR  | 4'   | 3,500 | 25W    | 120-277V              | 4000K | 80+ | Frosted    | 185° | 50K      | 54W                  | ✓   |
| <b>09900</b> | LED25WT5HO/46/850-G8DR  | 4'   | 3,500 | 25W    | 120-277V              | 5000K | 80+ | Frosted    | 185° | 50K      | 54W                  | ✓   |

NOTE: Use order code when ordering.

\*Canada only

✓ DesignLights Consortium Qualified

## Watts & Lumens\*

| Lamp                   | CCT (K) | Length (ft) | Bare Lamp (Rated) |                | Bare Lamp Wattage |                 |                | System Wattage |                 |                | Initial Lumens |                 |                |
|------------------------|---------|-------------|-------------------|----------------|-------------------|-----------------|----------------|----------------|-----------------|----------------|----------------|-----------------|----------------|
|                        |         |             | Nominal Wattage   | Nominal Lumens | Low BF = .75      | Normal BF = .88 | High BF = 1.18 | Low BF = .75   | Normal BF = .88 | High BF = 1.18 | Low BF = .75   | Normal BF = .88 | High BF = 1.18 |
| LED25WT5HO/46/835-G8DR | 3500    | 4           | 25                | 3300           | /                 | 25.0            | /              | /              | 28.0            | /              | /              | 3350            | /              |
| LED25WT5HO/46/840-G8DR | 4000    | 4           | 25                | 3500           | /                 | 25.0            | /              | /              | 28.0            | /              | /              | 3500            | /              |
| LED25WT5HO/46/850-G8DR | 5000    | 4           | 25                | 3500           | /                 | 25.0            | /              | /              | 28.0            | /              | /              | 3500            | /              |

\* Watts and lumens will vary by ballast and fixture.

Visit [eiko.com](http://eiko.com) to view complete ballast compatibility information.

watch > like > follow

