



## LED T5 Direct Fit Replacement Lamps

Electronic Ballast Compatible Tubes

### Features

- Directly replaces T5 fluorescent lamps
- No socket changes; for use with non-shunted socketed fixtures
- Operates on most popular electronic
   programmed start fluorescent T5 ballasts
- No rewiring or modifications of any kind required
- Choice of 3500K, 4000K or 5000K CCT
- Frosted glass lens reduces visual glare
- Environment-friendly, no mercury or lead
- 5 year product warranty



### Performance

- 80+ CRI
- R9>20
- Beam Angle: 185°
- THD: <20%
- Power Factor: 0.90
- Rated Lifetime: 50K hours @ L70
- Suitable for use in fixtures where ambient temperature is between -4°F (-20°C) and 113°F (45°C)
- Compatible with select electronic ballasts
- Does not operate on fluorescent battery backup

 Does not operate on magnetic ballasts

25/ 11/12.5

watts

50K

<u>1</u>85°

beam

80+ <sub>CRI</sub>

- Does not operate on T8 or T12 ballasts
- Does not operate on dimming ballasts
- Refer to ballast compatibility checklist to confirm lamp/ballast system operability
- Contains no mercury or lead; classified as non-hazardous waste

## Applications

- Highbays
- Troffers
- Industrial Strips
- Cove Lighting
- Warehouses
- Stairwells
- Cold Storage



# selection. solutions. simplicity. eiko.com






# LED T5 Direct Fit Replacement Lamps

Electronic Ballast Compatible Tubes

### Dimensions

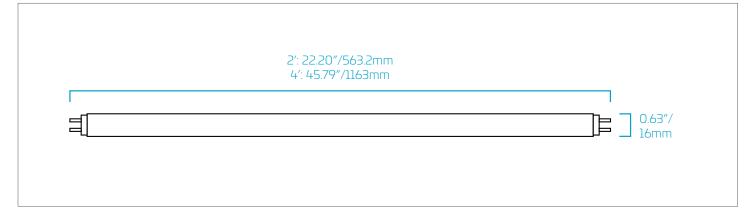

## Ordering Information

Order Code	Item #	Lngth	Lm	Lamp W	V (Ballast Dependent)	ССТ	CRI	Glass Tube	Bm	Life/ Hrs	Replaces Fluorescent	DLC	
09549	LED25WT5H0/46/835-G7DR	4′	3,200	25W	120-277V	3500K	80+	Frosted	185°	50K	54W	<ul> <li>Image: A start of the start of</li></ul>	
09550	LED25WT5H0/46/840-G7DR	4′	3,500	25W	120-277V	4000K	80+	Frosted	185°	50K	54W	<ul> <li>Image: A start of the start of</li></ul>	
09551	LED25WT5H0/46/850-G7DR	4′	3,500	25W	120-277V	5000K	80+	Frosted	185°	50K	54W	<ul> <li>Image: A start of the start of</li></ul>	
09553	LED11WT5H0/22/835-G7DR	2′	1,350	11W	120-277V	3500K	80+	Frosted	185°	50K	24W		
09554	LED11WT5H0/22/840-G7DR	2′	1,400	11W	120-277V	4000K	80+	Frosted	185°	50K	24W		
09555	LED11WT5H0/22/850-G7DR	2′	1,400	11W	120-277V	5000K	80+	Frosted	185°	50K	24W		
09556	LED12.5WT5HE/46/835-G7DR	4′	1,700	12.5W	120-277V	3500K	80+	Frosted	185°	50K	28W		
09557	LED12.5WT5HE/46/840-G7DR	4′	1,800	12.5W	120-277V	4000K	80+	Frosted	185°	50K	28W		
09558	LED12.5WT5HE/46/850-G7DR	4′	1,800	12.5W	120-277V	5000K	80+	Frosted	185°	50K	28W		
NOTE													

NOTE: Use order code when ordering.

✓ DesignLights Consortium Qualified

### NSF Listed



NSF offers the most accepted and trusted certification and verification programs for commercial foodservice equipment, specified by health departments, restaurant buyers and specifiers worldwide. NSF means market access – products with the NSF mark receive guaranteed regulatory acceptance in North America and improved acceptance worldwide. Verification programs, such as HACCP Compliance Verification - EU, demonstrate hygienic quality, independently verified by a trusted source.

watch > like > follow

23220 W. 84<sup>th</sup> St, Shawnee, KS 66227 · (P) 1.800.852.2217 · (F) 1.800.492.8975 Canada: 81 King St, Barrie, ON L4N 6B5 · (P) 1.888.410.8151 · (F) 1.888.705.1335