

LED PAR38

Features



13-20
watts

1,050-
1,700
lumens

up to
85
lpw

2700-
5000K
CCT

- Direct replacement for halogen PARs
- Compatible with a wide array of dimmers
- +25,000 hour rated life for ENERGY STAR® Approved lamps*
- 50,000 hour design life**
- Up to 80% electricity savings vs. halogen
- Choice of 2700K, 3000K, 4000K and 5000K color temperatures
- ENERGY STAR® Approved
- 25°/30°/40°/45° beam angles available
- No mercury or UV/IR emissions
- Shatter-resistant for reduced risk of injury and breakage



Performance

- 13/15/17W PAR38 replaces 120W PAR38 Halogen
- 20W PAR38 replaces 150W PAR38 Halogen
- 80+ CRI
- 120V @ 60Hz
- Operating temperature range from -40°F to 104°F (-40°C to 40°C)
- Not for use in enclosed fixtures
- Not for use with electronic timers, photocells, or motion/occupancy sensors
- Contains no mercury or lead; classified as non-hazardous waste

Applications

- Recessed / Track Lighting
- Property Management
- Accent / Display Lighting
- Retail / Residential
- Hospitality
- Houses of Worship
- Healthcare
- Task Lighting


* Early initial qualification for ENERGY STAR allows for directional lamp life claims of 25,000 hours (L70) with 3,000 hour actual test data, LM80 data and in-situ temperature measurements. As the lamps pass ENERGY STAR requirements, manufacturers may increase the lifetime of a product as dictated by ENERGY STAR guidelines. See http://www.energystar.gov/index.cfm?fuseaction=products_for_partners.showLightbulbs for further details.

** Design life is based on engineering testing and probability analysis



LED PAR38

Dimensions

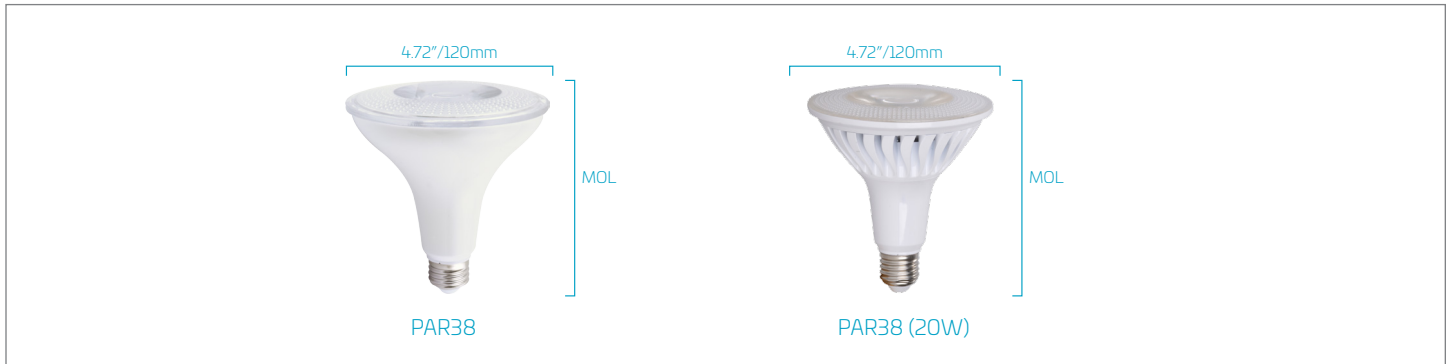

Ordering Information

Order Code	Item #	Lm	W	CBCP	CCT	CRI	Bm	MOL	Life/Hrs	Replaces Incandescent	WET	ES
09161	LED13WPAR38/FL/827K-DIM-G6	1,050	13W	2802	2700K	80+	40°	5.16"	25K	120W PAR38		★
09162	LED13WPAR38/FL/830K-DIM-G6	1,050	13W	3298	3000K	80+	40°	5.16"	25K	120W PAR38		★
09163	LED13WPAR38/FL/840K-DIM-G6	1,050	13W	3094	4000K	80+	40°	5.16"	25K	120W PAR38		★
09164	LED13WPAR38/NFL/827K-DIM-G6	1,050	13W		2700K	80+	25°	5.16"	25K	120W PAR38		★
09165	LED13WPAR38/NFL/830K-DIM-G6	1,050	13W		3000K	80+	25°	5.16"	25K	120W PAR38		★
09166	LED13WPAR38/NFL/840K-DIM-G6	1,050	13W		4000K	80+	25°	5.16"	25K	120W PAR38		★
10069	LED15WPAR38/FL/827-DIM-G8	1,250	15W		2700K	80+	40°	5.16"	25K	120W PAR38	💧	★
09990	LED15WPAR38/FL/830-DIM-G8	1,250	15W		3000K	80+	40°	5.16"	25K	120W PAR38	💧	★
09991	LED15WPAR38/FL/840-DIM-G8	1,250	15W		4000K	80+	40°	5.16"	25K	120W PAR38	💧	★
09992	LED15WPAR38/FL/850-DIM-G8	1,250	15W		5000K	80+	40°	5.16"	25K	120W PAR38	💧	★
10064	LED15WPAR38/NFL/827-DIM-G8	1,250	15W		2700K	80+	25°	5.16"	25K	120W PAR38	💧	★
10065	LED15WPAR38/NFL/830-DIM-G8	1,250	15W		3000K	80+	25°	5.16"	25K	120W PAR38	💧	★
10066	LED15WPAR38/NFL/840-DIM-G8	1,250	15W		4000K	80+	25°	5.16"	25K	120W PAR38	💧	★
09513	LED15WPAR38/FL/827-DIM-G7	1,250	15W		2700K	80+	40°	5.16"	25K	120W PAR38	💧	★
09514	LED15WPAR38/FL/830-DIM-G7	1,250	15W		3000K	80+	40°	5.16"	25K	120W PAR38	💧	★
09515	LED15WPAR38/FL/840-DIM-G7	1,250	15W		4000K	80+	40°	5.16"	25K	120W PAR38	💧	★
09516	LED15WPAR38/FL/850-DIM-G7	1,250	15W		5000K	80+	40°	5.16"	25K	120W PAR38	💧	★
09770	LED15WPAR38/NFL/827-DIM-G7	1,300	15W		2700K	80+	25°	5.16"	25K	120W PAR38	💧	
09769	LED15WPAR38/NFL/830-DIM-G7	1,300	15W		3000K	80+	25°	5.16"	25K	120W PAR38	💧	★
09730	LED15WPAR38/NFL/840-DIM-G7	1,300	15W		4000K	80+	25°	5.16"	25K	120W PAR38	💧	★
90044	LED17WPAR38/FL/827K-DIM-G4A	1,300	17W	3156	2700K	80+	40°	5.12"	25K	120W PAR38	💧	
09326	LED17WPAR38/FL/850K-DIM-G4A	1,300	17W		5000K	80+	40°	5.12"	25K	120W PAR38	💧	
90039	LED17WPAR38/NFL/840K-DIM-G4A	1,300	17W	7162	4000K	80+	25°	5.12"	25K	120W PAR38		
09170	LED20WPAR38/FL/827K-DIM-G6	1,700	20W	3179	2700K	80+	45°	5.16"	25K	150W PAR38		★
09171	LED20WPAR38/FL/830K-DIM-G6	1,700	20W	3021	3000K	80+	45°	5.16"	25K	150W PAR38		★
09172	LED20WPAR38/FL/840K-DIM-G6	1,700	20W	3535	4000K	80+	45°	5.16"	25K	150W PAR38		★
09173	LED20WPAR38/NFL/827K-DIM-G6	1,700	20W	6140	2700K	80+	30°	5.16"	25K	150W PAR38		
09174	LED20WPAR38/NFL/830K-DIM-G6	1,700	20W	5638	3000K	80+	30°	5.16"	25K	150W PAR38		
09175	LED20WPAR38/NFL/840K-DIM-G6	1,700	20W	6739	4000K	80+	30°	5.16"	25K	150W PAR38		★

NOTE: Use order code when ordering.

* 25,000-40,000 hour ENERGY STAR® rated life. 50,000 hour design life. See note on obverse.

💧 Wet Location Rated ★ ENERGY STAR® Approved

watch > like > follow



23220 W. 84th St, Shawnee, KS 66227 · (P) 1.800.852.2217 · (F) 1.800.492.8975
 Canada: 81 King St, Barrie, ON L4N 6B5 · (P) 1.888.410.8151 · (F) 1.888.705.1335