




LED Bypass/Line Voltage T5HO Tube Lights : Double-Ended

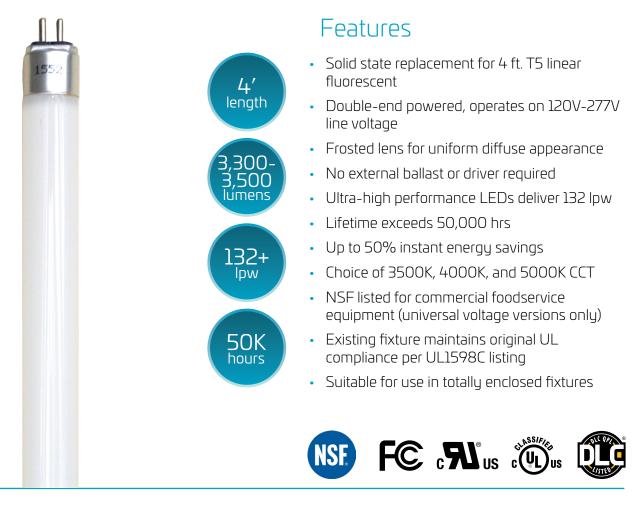

Performance

- 4ft. 3,300lm @25W = 132lpw
- 4ft. 3,500lm @25W = 140+lpw
- Long life: 50,000 hours
- 80+ CRI
- Integral 120~277V drivers provide easy installation
- Wide ambient temperature range from -20°C (-4°F) to 45°C (113°F)

- Use with T5 lamp holders
- <20% Total Harmonic Distortion
- Non-dimmable
- Contains no mercury or lead; classified as non-hazardous waste

Applications

- Commercial
- Industrial
- Hospitality
- Education
- Healthcare
- Retail



selection. solutions. simplicity. eiko.com






watch > like > follow

LED Bypass/Line Voltage T5HO Tube Lights : Double-Ended

Wiring Diagram

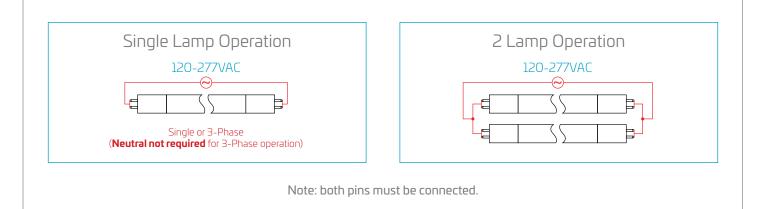

Ordering Information

Order Code	Item #	Lngth	W	Lm	Lpw	ССТ	CRI	Envelope	Life/ Hrs	DLC
09949	LED25WT5H0/46/835-G8D	4′	25W	3,300	132	3500K	80+	Glass	50,000	1
09947	LED25WT5H0/46/840-G8D	4′	25W	3,500	140	4000K	80+	Glass	50,000	 Image: A second s
09948	LED25WT5H0/46/850-G8D	4′	25W	3,500	140	5000K	80+	Glass	50,000	✓
10047	LED25WT5H0/46/835-G8D-347V*	4′	25W	3,375	135	3500K	80+	Glass	50,000	1
10048	LED25WT5H0/46/840-G8D-347V*	4′	25W	3,375	135	4000K	80+	Glass	50,000	1
10049	LED25WT5H0/46/850-G8D-347V*	4′	25W	3,375	135	5000K	80+	Glass	50,000	1
NOTE: L	Jse order code when ordering.	*Canada only					✓ DesignLights Consortium [®] Qualified			

NSF Certification



NSF offers the most accepted and trusted certification and verification programs for commercial foodservice equipment, specified by health departments, restaurant buyers and specifiers worldwide. NSF means market access – products with the NSF mark receive guaranteed regulatory acceptance in North America and improved acceptance worldwide. Verification programs, such as HACCP Compliance Verification - EU, demonstrate hygienic quality, independently verified by a trusted source.

23220 W. 84th St, Shawnee, KS 66227 · (P) 1.800.852.2217 · (F) 1.800.492.8975 Canada: 81 King St, Barrie, ON L4N 6B5 · (P) 1.888.410.8151 · (F) 1.888.705.1335