



# SWP1 Slim Wall Pack

## HIGHLIGHTS

- Slim profile wallpack suitable for many applications
- 4 - 1/2" knockouts ensures easy installation
- Wall mount with or without junction box
- Integrated photocell for dusk-to-dawn operation; can be relocated to top or opposite side
- Internal level simplifies installation without the need for additional tools
- Hinged removable door housing makes installation easier
- Glass lens
- PowerSet feature allows for multiple lumen stops out of the box
- FieldCCeT features provides multiple color temperature settings in one fixture

## CERTIFICATIONS

- UL Listed for US & Canada
- RoHS Compliant
- FCC Compliant
- ICES-005 Compliant
- IP65 Rated
- DesignLights Consortium® Premium Qualified - meets the requirements for the highest DLC qualification for efficacy and lumen maintenance

## PERFORMANCE

- High efficacy, up to 135 lm/W
- Available in PowerSet models: power-selectable 120/100/80W; 60/45/30W
- Available in FieldCCeT models: field-selectable CCT 30/40/5000K
- CRI: >80
- Estimated L70: 100,000 Hours

## ELECTRICAL

- Input voltage: 120-277V
- 0-10 V dimming, dim-to-off
- Surge protection: 6kV
- Power factor: >0.9
- THD: <20%

## THERMAL

- -40°F to 122°F (-40°C to 50°C) ambient operating temperature
- -13°F to 122°F (-25°C to 50°C) ambient operating temperature with photocell


## CONSTRUCTION

- Bronze powder coated, die-cast aluminum housing
- Glass Lens

## WARRANTY

- 5 Year limited warranty available [online](#). Contact your EiKO sales rep for additional details.

project name	type
catalog number	voltage
approved by	date

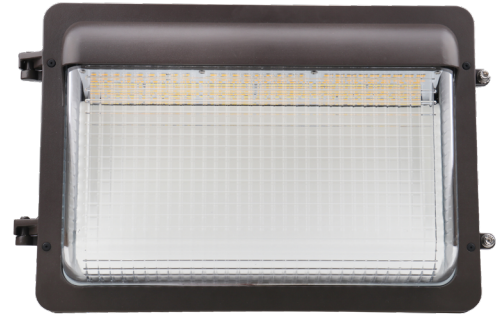

## APPLICATIONS

- Industrial Parks
- Loading Docks
- Utility Sheds
- Entryways
- Walkways
- Storage Areas
- Security
- Perimeter Lighting

## KEY FEATURES

### SELECTABLE CCT AND WATTAGE

Choose your CCT and Wattage upon installation; great for SKU reduction and job site flexibility

### SLIM PROFILE


Large enough to cover the opening of a traditional wallpack, but the slim design gives this basic wallpack a more modern look

### INTEGRATED PHOTOCELL

Photocell can be moved to another knockout or disabled

### INSTALLATION

4 - 1/2" Knockouts, internal level, hinged door and can be mounted with or without junction Box

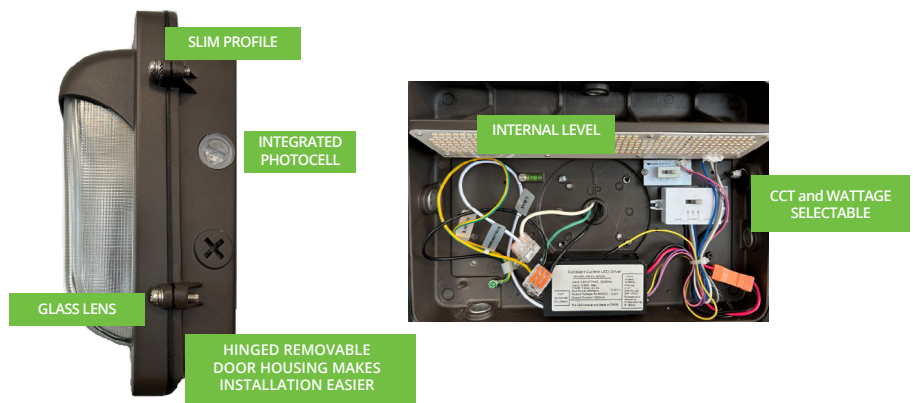

## ORDERING GUIDE

### MODEL CONFIGURATOR

MODEL	WATTS	CCT	VOLTAGE & DIMMING
<b>SWP 1:</b> Slim Wall Pack	<b>PS120:</b> 120/100/80W <b>PS60:</b> 60/45/30W	<b>FCCT:</b> 3000/4000/5000K	<b>U:</b> 120-277V, 0-10V dimming

### FACTORY INSTALLED OPTIONS

MODEL	-	POWER	-	CCT	-	VOLTS & DIMMING
<b>SWP1</b>	-		-		-	

EXAMPLE PART NUMBER: SWP1-PS60-FCCT-U


## AVAILABLE MODELS

ORDER CODE	ITEM #	WATTS*	CCT**	LUMENS	EFFICACY (lm/W)	VOLTAGE	TRADITIONAL WATTAGE EQUIVALENT	DLC ID #
								PREMIUM
13411	SWP1-PS60-FCCT-U	60/45/30W	3000/4000/5000K	8100/6075/4050 lm	135 lm/W	120-277V	Up to 150W HID	S-UHSIW1
13410	SWP1-PS120-FCCT-U	120/100/80W	3000/4000/5000K	16,200/13,500/10,800 lm	135 lm/W	120-277V	Up to 400W HID	S-FHMON3

\* All power-selectable fixtures ship at the highest wattage setting


\*\* All CCT-selectable fixtures ship at 5000K

## PRODUCT DIMENSIONS

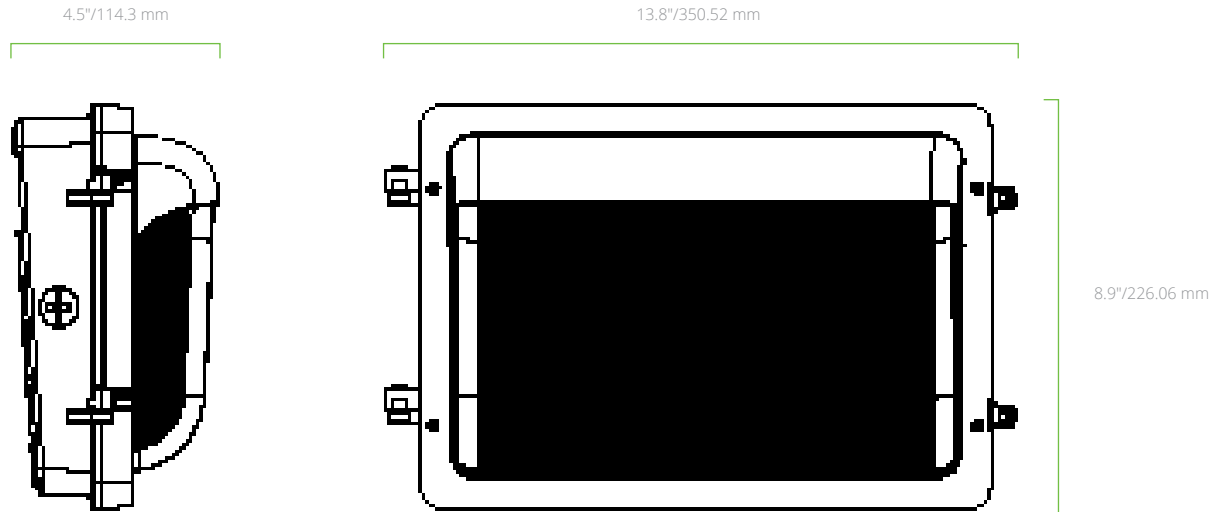

### 60W MODELS

Weight: 7.7 lbs / 3.5 kg

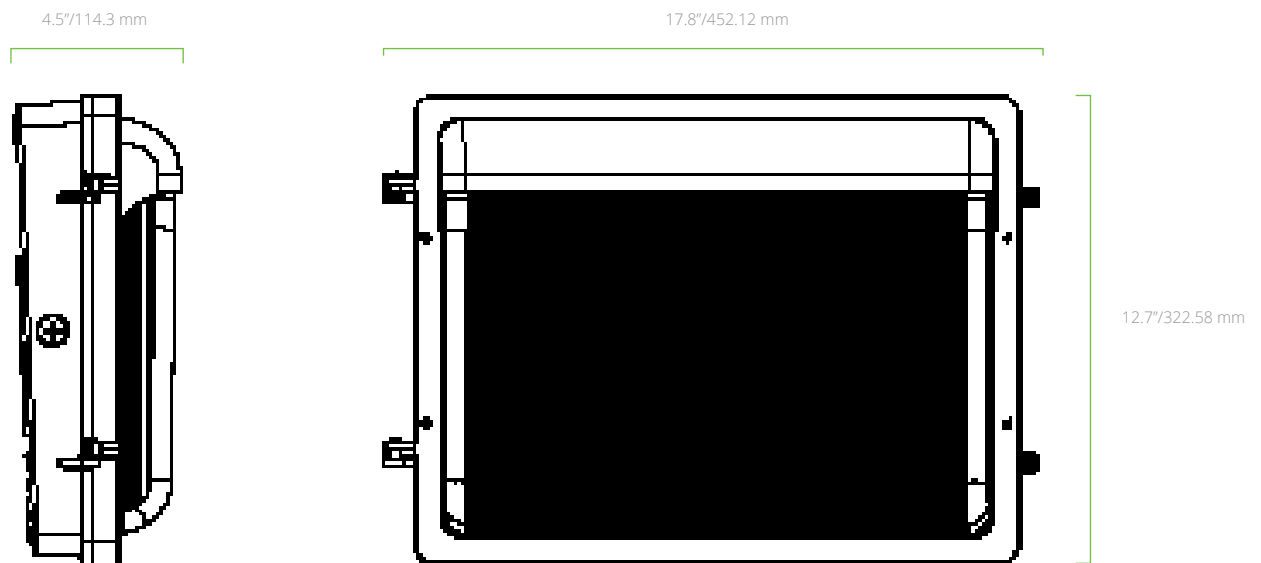

### 120W MODELS

Weight: 8.4 lbs / 3.8 kg