

NEW

DESCRIPTION

Designed for remodel applications. For fast and easy installation in existing plaster or mechanical ceilings. Four remodel clips are easily retractable for fixture removal if necessary.

1. LAMP HOLDER - Aluminum lamp holder effectively provides heat dissipation and ventilation. Unitized optics guarantees proper trim to housing installation. Tool-less installation adjustability from either outside the housing or inside the housing.

2. JUNCTION BOX/BALLAST - UL listed for through-branch circuit wiring and has four 1/2" KO's, one 3/4" KO and four Romex knockouts with pry-out slots and strain clamps. Ballast and Junction Box are accessible from below, no tools required. Ballast supplied is manufactured by Philips Advance, Universal Technologies or Lutron Electronics.

3. MOUNTING FRAME - Die-formed construction for maximum heat dissipation and rust protection. Four pre-installed spring clips which secure the housing firmly into ceiling to accommodate ceiling thickness from 1/2" to 1-3/8".

OPTICS

4. REFLECTOR - Self-flanged .050" aluminum reflector with low iridescent finish. Reflector provides 45-degree lamp-to-reflector image cutoff.

5. GROOVE BAFFLE - Self-flanged one-piece aluminum with concentric rings.

6. LENS - Choice of either tempered clear, tempered prismatic or tempered frosted lens fastened with two torsion springs for easy re-lamping. UL listed for wet or damp location.

LISTING



UL listed for through-branch circuit wiring and damp locations. Wet location only with lens trims.

Please visit our website for the most updated information on each product.



REMODEL HOUSING

TRIM: 8501 REFLECTOR

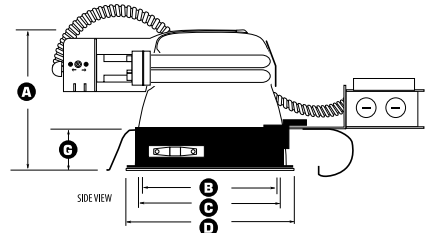

- A. Height = 6-3/8"
- B. Trim Aperture = 7-7/8"
- C. Cut-out = 8-1/8"
- D. Trim Outside Diameter = 9"
- E. Width = 8-3/4"
- F. Length = 14-1/8"
- G. Flange = 2-1/4"

LAMP BASE GUIDE (Sockets will accept all designated lamp bases listed.)				
13W	18W	26W	32W	42W
G24q-1 GX24q-1	G24q-2 GX24q-2	G24q-3 GX24q-3 GX24q-4	GX24q-3 GX24q-4	GX24q-4



HHR8PL - ITEM SELECTOR: (Please check the boxes below for the option desired)

WATTAGE		BALLAST	VOLTAGE	EMERGENCY OPTIONS	TRIM TYPE & DESCRIPTION		REFLECTOR	BAFFLE	GLASS
1 LAMP	2 LAMPS	<input type="checkbox"/> (E) Electronic ¹	<input type="checkbox"/> MVOLT	<input type="checkbox"/> EMG 750 (750 lm) ⁶	<input type="checkbox"/> 8501 Reflector	<input type="checkbox"/> 8517 Baf./Pris. Plas. Lns.	<input type="checkbox"/> CL-WH	<input type="checkbox"/> W-CL-WH	<input type="checkbox"/> Blue
<input type="checkbox"/> 1X13	<input type="checkbox"/> 2X13	<input type="checkbox"/> (S) Energy Star ²	<input type="checkbox"/> (120/277)	<input type="checkbox"/> EMG 1300 (1300 lm) ⁶	<input type="checkbox"/> 8502 Baffle/Reflector	<input type="checkbox"/> 8518 Ref./Tem. Clr. Plas.	<input type="checkbox"/> CL-SCH	<input type="checkbox"/> P-CL-WH	<input type="checkbox"/> Green
<input type="checkbox"/> 1X18	<input type="checkbox"/> 2X18		<input type="checkbox"/> 120	<input type="checkbox"/> ICE-1300 (1300 lm) ¹⁰	<input type="checkbox"/> 8503 Ref./Fres. Gls. Lns.	<input type="checkbox"/> 8519 Baf./Tem. Clr. Plas.	<input type="checkbox"/> SHZ-SHZ	<input type="checkbox"/> W-WH	<input type="checkbox"/> Red
<input type="checkbox"/> 1X26	<input type="checkbox"/> 2X26		<input type="checkbox"/> 277	<input type="checkbox"/> EMG-SD-1300 (1300 lm) ¹⁴	<input type="checkbox"/> 8504 Ref./Pris. Gls. Lns.	<input type="checkbox"/> 8509 Deco Glass Ring	<input type="checkbox"/> SHZ-WH	<input type="checkbox"/> P-WH	<input type="checkbox"/> Frost
<input type="checkbox"/> 1X32	<input type="checkbox"/> 2X32		<input type="checkbox"/> 347		<input type="checkbox"/> 8505 Baf./Fres. Gls. Lns.	<input type="checkbox"/> 8510 Double Ring	<input type="checkbox"/> WT-WH		
<input type="checkbox"/> 1X42	<input type="checkbox"/> 2X42				<input type="checkbox"/> 8506 Baf./Pris. Gls. Lns.	<input type="checkbox"/> 8511 Triple Ring	<input type="checkbox"/> W-WH		
		DIMMING			<input type="checkbox"/> 8507 Wall Wash Ref.	<input type="checkbox"/> 8521 Startdust Deco Ring Gls.	<input type="checkbox"/> MB-WH		
		<input type="checkbox"/> Mark 7 ³		OTHER OPTIONS	<input type="checkbox"/> 8508 Crossblade Ref.	<input type="checkbox"/> 8522 Euro Deco Ring Gls.			
		<input type="checkbox"/> Mark 10 ⁴		<input type="checkbox"/> FUSE ¹¹	<input type="checkbox"/> 8512 Baf./Frost Gls. Lns.	<input type="checkbox"/> 8523 Prism Deco Ring Gls.			
		<input type="checkbox"/> Lut-E (EC3D) ⁵		<input type="checkbox"/> RIF ¹²	<input type="checkbox"/> 8513 Baf./Tem. Clr. Gls.	<input type="checkbox"/> 8524 Geo Deco Ring Gls.			
					<input type="checkbox"/> 8514 Ref./Frost Gls. Lns.	<input type="checkbox"/> 8525 Central Etched Float Gls.			
					<input type="checkbox"/> 8515 Ref./Tem. Clr. Gls.	<input type="checkbox"/> 8526 Diff. Screen Wall Wash			
					<input type="checkbox"/> 8516 Ref./Pris. Plas. Lns.	<input type="checkbox"/> 8527 Geo Deco Ring Gls.			

REFLECTOR	BAFFLE	GLASS
CL Clear	WH White	Only available on XX09, XX10 and XX11 series.
SHZ Satin Haze (Low Intensity)	P Black	
WT Wheat	RING Self-Flange White	
MB Black	SCH Self-Flange Chrome	
W White	SHZ Satin Haze	

*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.

¹ - Electronic = Not available on 9W only • ² - (S) Energy Star = Available on selected fixtures only, please see list above • ³ - MARK 7 = Must specify voltage, not compatible with Emergency Options • ⁴ - MARK 10 = Not available on 9W, 13W, 57W, 70W, must specify voltage, not compatible with Emergency Options • ⁵ - LUT-E (EC3D) = Not available on 9W, 13W, 57W, 70W, must specify voltage • ⁶ - EMG = Emergency battery pack w/ remote test switch • ⁷ - INTG = Emergency battery pack w/ integral (reflector) test switch • ⁸ - EMG-D = Emergency battery pack w/ remote test switch for damp location • ⁹ - INTG-D = Emergency battery pack w/ integral(reflector) test switch for damp location • ¹⁰ - ICE = Emergency battery pack w/ remote test switch operating between -18°C and 55°C • ¹¹ - FUSE = Single slow-blow fuse • ¹² - RIF = Radio interference filter • ¹³ - Magnetic = Available on 9W, 13W, 18W & 26W fixtures only • ¹⁴ - SD = Emergency battery pack w/ Self-Diagnostic

Specifications:

HHR8PL WATT BALLAST VOLTAGE EMERGENCY OPTIONS TRIM TYPE REFLECTOR BAFFLE GLASS

Sample of Catalog Number: HHR8PL-1X32-E-MVOLT-EMG750-8501-CL-WH

Due to the changes of constant improvement in lighting technology, all details are subject to change without notice. Consult factory for up to date information.



8"

ARCHITECTURAL CFL HORIZONTAL REMODEL DOWNLIGHT