




**EASY 3 COLORS**  
**SELECTOR**  
3500K • 4000K • 5000K

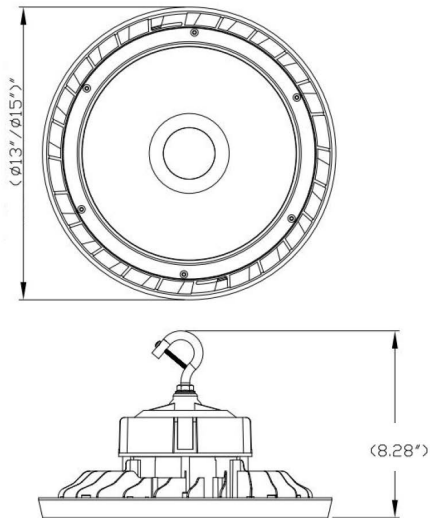

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
26000	24931	200 W
19000	19115	150 W

Based on 4000K, 85+ CRI. Actual wattage may vary +/- 5%

**FEATURES**

The Oracle LED UFO High Bay is a round high bay designed to withstand high temperatures, wet environments, airborne contaminants, and electrical shock. High lumen output and circular form factor leave no dark corners. Built-in hanging hook included for easy installation. Applications include warehouses, commercial facilities, retail, roadways, campuses, garages with high ceilings, and gymnasiums.

LUMENS	19000, 26000
CCT	35K/40K/50K
CRI	80+ Standard
MOUNTING	Suspended
DISTRIBUTION	Wide (WD)
EMERGENCY	10W - Up to 1000L Output 20W - Up to 2000L Output
WORKING TEMPERATURE	-40C to 40C
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21

WD: WIDE  
Candlepower Distribution Curve



**PERFORMANCE**

Efficacy up to 130lm/W, designed to replace 400W metal halide (MH) bulbs while consuming 200W. Increase energy savings with optional bi-level motion sensor.

**OPTICS**

A .16" thick clear tempered glass lens protects LEDs. Reflector and lens options provide maximum versatility and uniformity.

**CONSTRUCTION**

One-piece, sealed die-cast aluminum housing requires no additional parts. Heat sink included in casting, preventing high bay from heating up during use. Wet location rating serves both indoor and outdoor applications.

**INSTALLATION**

Included: Hook mount, safety cable and 0-10V dimming cord.

Surge Protection Level: Built-in 6kV surge protection; class 2 product (shock-resistant).

**ELECTRICAL**

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120-347V, produce less than 20% THD, and have a power factor of .90 to 1.00.

**DIMMING & DRIVER INFORMATION**

**DIM10** - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120, 347V.

**RATINGS**

cULus wet location rated  
IP65-rated; completely sealed to protect against water and dirt  
DLC Premium-listed  
RoHS reach

Example: **ORHB4-LED-26000L-MVOLT-35/40K/50K-WD-BK**

<b>ORHB4</b>	<b>LED</b>						
<b>SERIES</b>	<b>TYPE</b>	<b>LUMENS</b>	<b>VOLTAGE</b>	<b>CCT</b>	<b>OPTICS</b>	<b>FINISH</b>	<b>EMERGENCY</b>
ORHB4-Oracle LED Round High Bay Series	LED	19000L - (19000 lumens) 26000L - (26000 lumens)	MVOLT	35/40K/50K	WD - WIDE	BK - Black	0-EMG-LED-10W 0-EMG-LED-20W