

OWP-FC-201-LED

LED Medium Full Cut-Off Wall Pack Series

up to 61 Wattage / up to 6000 Lumens

Catalog Number:

Project Name:

Note:

Type:




APPLICATIONS:

This rugged medium size full cut-off LED die-cast aluminum wall pack provides long lasting, energy efficient lighting with a variety of options to customize fixture performance to the required task. Easily mounts to building and is ideal for industrial, educational, multi-family, institutional, and government applications.


FEATURES:

- Full cut-off and compliance to Dark Sky requirement
- Lumen output from 4900-6900lm with efficacy up to 93lm/W
- 43W-63W power consumption, to replace 150W-250W MH
- Type II distribution with frosted tempered flat glass integrated lens
- Operating temperature is -40°C to 50°C (-40°F to 122°F)
- Dimmable
- UL/cUL wet location
- DLC qualified**

DIMENSION:

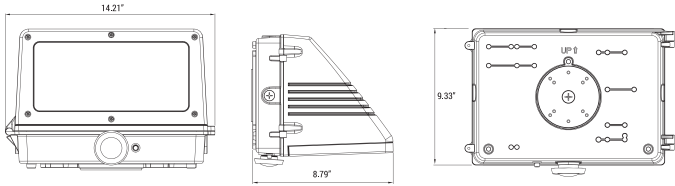

PHOTOMETRICS:

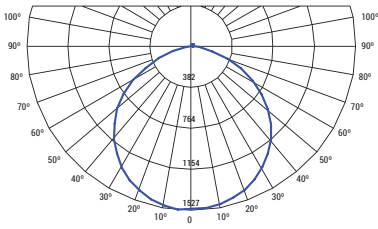

B	U	G
2	1	1

SPECIFICATIONS:

LUMENS	4500 / 6000 lumens
WATTAGE	45W / 58W
CCT	40K, 50K
CRI	80
LIGHT EFFICIENCY	100 lumens/watt
VOLTAGE	120-277 VAC
POWER FREQUENCY	50/60 Hz
FINISH	Bronze
APPLICABLE ENVIRONMENT	Dry/Damp/Wet location
WORKING TEMPERATURE	-40°C to 50°C



Ordering Guide > Example: OWP-FC-201-LED-6000L-MVOLT-40K-BZ

SERIES	PERFORMANCE	VOLTAGE	CCT	FINISH	EMERGENCY	ACCESSORIES
OWP-FC-201-LED	4500L - 4500 lumens 6000L - 6000 lumens	MVOLT - 120-277V 347	40K - 4000K 50K - 5000K	BZ SI WH RAL	0-EMG-LED	PHC - Photocell FS-305RC - Wattstopper Motion Sensor

* For more lumen package option, consult factory

* For more CCT option, consult factory

** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.



Submittal form is available @ www.oraclelighting.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions subject to change without notice.

Issued-H2418-Rev. 2