




EASY 3 COLORS
SELECCTOR
3000K • 4000K • 5000K

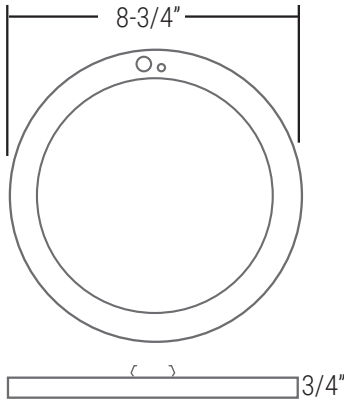

PIR SENSOR CONFIGURATION

Daylight Sensor	Hold Time	Soft ON/OFF										
<table border="1"> <tr><td>1</td><td>2</td></tr> <tr><td><input type="checkbox"/></td><td><input type="checkbox"/></td></tr> </table> 10Lux	1	2	<input type="checkbox"/>	<input type="checkbox"/>	<table border="1"> <tr><td>3</td><td>4</td></tr> <tr><td><input type="checkbox"/></td><td><input type="checkbox"/></td></tr> </table> 5 Sec.	3	4	<input type="checkbox"/>	<input type="checkbox"/>	<table border="1"> <tr><td>5</td></tr> <tr><td><input type="checkbox"/></td></tr> </table> NO	5	<input type="checkbox"/>
1	2											
<input type="checkbox"/>	<input type="checkbox"/>											
3	4											
<input type="checkbox"/>	<input type="checkbox"/>											
5												
<input type="checkbox"/>												
<table border="1"> <tr><td>1</td><td>2</td></tr> <tr><td><input type="checkbox"/></td><td><input type="checkbox"/></td></tr> </table> 20Lux	1	2	<input type="checkbox"/>	<input type="checkbox"/>	<table border="1"> <tr><td>3</td><td>4</td></tr> <tr><td><input type="checkbox"/></td><td><input type="checkbox"/></td></tr> </table> 30 Sec.	3	4	<input type="checkbox"/>	<input type="checkbox"/>	<table border="1"> <tr><td>5</td></tr> <tr><td><input type="checkbox"/></td></tr> </table> YES	5	<input type="checkbox"/>
1	2											
<input type="checkbox"/>	<input type="checkbox"/>											
3	4											
<input type="checkbox"/>	<input type="checkbox"/>											
5												
<input type="checkbox"/>												
<table border="1"> <tr><td>1</td><td>2</td></tr> <tr><td><input type="checkbox"/></td><td><input type="checkbox"/></td></tr> </table> 40Lux	1	2	<input type="checkbox"/>	<input type="checkbox"/>	<table border="1"> <tr><td>3</td><td>4</td></tr> <tr><td><input type="checkbox"/></td><td><input type="checkbox"/></td></tr> </table> 1 Min.	3	4	<input type="checkbox"/>	<input type="checkbox"/>			
1	2											
<input type="checkbox"/>	<input type="checkbox"/>											
3	4											
<input type="checkbox"/>	<input type="checkbox"/>											
<table border="1"> <tr><td>1</td><td>2</td></tr> <tr><td><input type="checkbox"/></td><td><input type="checkbox"/></td></tr> </table> 24Hrs	1	2	<input type="checkbox"/>	<input type="checkbox"/>	<table border="1"> <tr><td>3</td><td>4</td></tr> <tr><td><input type="checkbox"/></td><td><input type="checkbox"/></td></tr> </table> 3 Min.	3	4	<input type="checkbox"/>	<input type="checkbox"/>			
1	2											
<input type="checkbox"/>	<input type="checkbox"/>											
3	4											
<input type="checkbox"/>	<input type="checkbox"/>											

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
1500	1506	18W

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

INSTALLATION

You MUST seal all gaps between the ceiling and fixture with weatherproof silicone sealant. This deters moisture and water from damaging fixtures and other mechanical ceiling elements.

FEATURES

The Elite LED Slim Surface Mount has been engineered to install into most standard junction boxes. Up to 1500 usable lumens are directed from the luminaire to the work surface. Easy to install, applicable to junction box or recessed can installation. The Elite Lights turns ON/OFF when movement is detected.

LUMENS	1500
CCT	30K/40K/50K
CRI	90+
COLOR QUALITY	3-Step MacAdam Ellipse
FINISH	WH (White)
LIFETIME	50,000 Hours

OPTICS

The Elite LED Module system is much more than just a simple LED retrofit. The Elite LED system is a highly engineered work of design and optical science which produces up to 1500 lumens. Our meticulously crafted optics gather the light scattered by the LED chip and shape it into a functional beam with uniform light distribution.

COMPLIANCE

Non-conductive fixture for shower light application. Product complies with the requirements of the California Energy Commission regulated under Title 24.

LISTING

ETL listed for damp location (wet location - with covered ceilings)
Energy Star certified

WARRANTY

The Elite LED lighting system carries a five-year carefree warranty for parts and components. (Labor not included)

EXAMPLE: **RL993-1500L-120-30K/40K/50K-90-WH**

TYPE	LUMEN	CCT	CRI	FINISH
RL993	<input type="checkbox"/> 1500L-120	<input type="checkbox"/> 30K/40K/50K	<input type="checkbox"/> 90+	<input type="checkbox"/> WH-White

