



Designed.  
Manufactured.  
In the USA

landscape • architectural • hospitality • entertainment • illumination

# INTRODUCING AL08 SERIES 2 LED BOLLARDS W/ ACRYLIC ACCENTS



Model Shown  
AL08LGMS2L24CPR



Model Shown  
AL08SMDMS2L74COP



Model Shown  
AL08MDDMS2L24WHT



Model Shown  
AL08LGMS2L24BRS




NEW

# AL08 SERIES **2** Bollards SMALL



Model Shown  
**AL08SMDMS2L74COP**

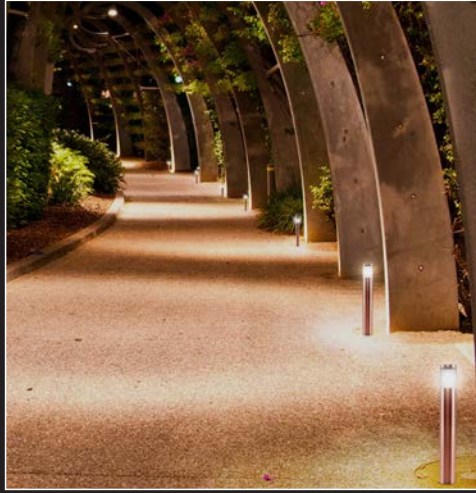

Model Shown  
**AL08SMDMS2L4COP**



Model Shown  
**AL08SMDMS2L4COP**



Model Shown  
**AL08SMDMS2BL4COP**  
Shown with Blue Accent

TO PLACE ORDERS – TOLL FREE (888)882.1350  
ORDERS@FOCUSINDUSTRIES.COM

## AL08SMDMS2L4COP

SMALL

### SPECIFICATIONS

**CONSTRUCTION:** 1.50" Dia. 12" Above grade

Seamless tube body made of Copper, with matching copper spun cap

**LENS:** Frosted / High impact acrylic Snoot

**LED SUPPLIED:** 2W Omni Mini SSBP Super Saver (L4), 3000K, 40,000 hrs

**LAMP OPTIONS:** 3W Omni G2 Bi-Pin (L14), 3000K, 50,000 hrs

1.5w G4 BP MR8 Arrow Super Saver (L74) 3000K, 25,000 hrs

**SOCKET:** High temperature ceramic G4 bi-pin with 250°C silicone lead wires

**WIRING:** Black 3 foot 18/2 zip cord from base of fixture

For 25 foot 16/2 fixture lead wire add -25F to catalog number.

**CONNECTION:** FA05 Quick Connector (not supplied) from fixture to main cable


**MOUNTING:** Deck Mount (-DM) supplied with FA03 black ABS 9" Stake, Taped 1/2" NPS

**FINISH:** Unfinished Copper


**POWDER COAT OPTIONS AVAILABLE**

\*Powder coat finishes over Copper are custom and Non-Returnable

**GLASS COLOR LENS OPTIONS:**

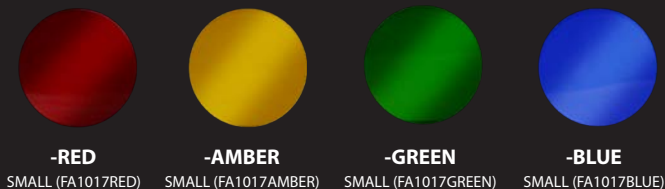

### LIGHT DISTRIBUTION

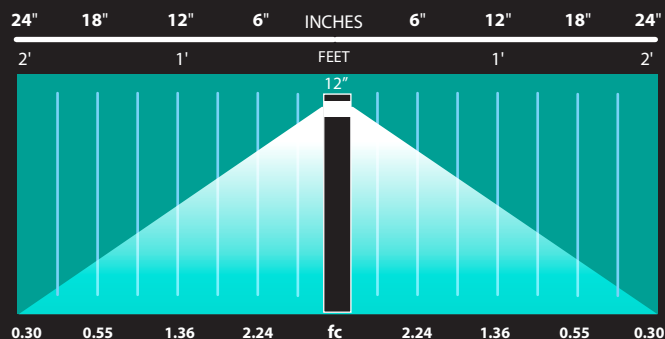

### ORDERING INFORMATION


### LAMP SHIP WEIGHT

AL08SMDMS2L4COP	1.5" Copper Bollard, Deck Mount	2w LED	2.0 lbs.
AL08SMDMS2L74COP	1.5" Copper Bollard, Deck Mount	1.5w LED	2.0 lbs.

### ACCESSORIES

FA03	9" Black ABS Stake, 1/2" Female NPS
FA03RXBRS	RX Remedy 7" Brass Stake 1/2" Female NPS
FA032PBLK	2 Prong Stake, Stainless Steel, 1/2" Female NPS, Black
FA24BRS	Brass, Single 1/2" NPS Threaded Round Mini Canopy,
FA24MDCSTBRS	Cast Brass 2.6" Round Canopy, 1/2" NPS
FA24LP3BRS	Brass 3" Round Low Profile Canopy, 1/2" NPS

### DIMENSIONAL DRAWINGS

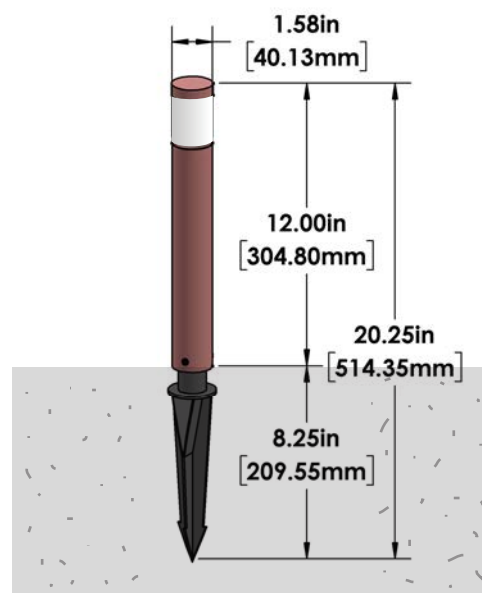

**AL08SMDMS2L4COP (12V)**  
(SHOWN WITH FA03 MOUNTING STAKE)



NEW

# AL08 SERIES **2** Bollards MEDIUM



Model Shown  
**AL08MDDMS2L24WHT**



Model Shown  
**AL08MDDMS2L24BRT**



Model Shown  
**AL08MDDMS2L24COP**



Model Shown  
**AL08MDDMS2AL24BR SBKM**  
Shown with Amber Accent

TO PLACE ORDERS – TOLL FREE (888)882.1350  
ORDERS@FOCUSINDUSTRIES.COM

## AL08MDDMS2L24BRS

## MEDIUM

### SPECIFICATIONS

#### CONSTRUCTION: 2.56" Dia. 18" Above grade

Seamless tube body made of Aluminum, Brass, or Copper, with matching spun cap

**LENS:** Frosted / High impact acrylic Snoot

**LED SUPPLIED:** 3W MR16 Super Saver LED 36° (L24), 3000K, 40,000 hrs

**LAMP OPTIONS:** 5w Super Saver 36° (L36), 3000K, 40,000 hrs

7w Super Saver 36° (L48), 3000K, 40,000 hrs

**SOCKET:** High temperature ceramic GU5.3 Bi-Pin with 250°C silicone lead wires

**WIRING:** Black 3 foot 18/2 zip cord from base of fixture

For 25 foot 16/2 fixture lead wire add -25F to catalog number.

**CONNECTION:** FA-05 Quick Connector (not supplied) from fixture to main cable

**MOUNTING:** Deck Mount (-DM) available with FA03LG black ABS 9" Stake, Taped 1/2" NPS

**FINISH:** Aluminum, Brass, and Copper unfinished

#### POWDER COAT OPTIONS AVAILABLE

\*Powder coat finishes over Brass and Copper are custom and Non-Returnable

#### 120V GU10 OPTION: 120V Standard Wiring

3W GU10 Base 36° (L108), 3000K, 40,000 hrs

5W GU10 Base 36° (L116), 3000K, 40,000 hrs

7W GU10 Base 36° (L126), 3000K, 40,000 hrs

**SOCKET:** High Temperature Ceramic GU10 twist & lock base with 250° Silicone lead wires

**MOUNTING:** Standard Angle cut model with 4 Black ABS stabilizing fins (-FA42FIN)

Deck Mount model (-DM) with ABS mounting base screws

#### 277V OPTION: Use LTF LED Driver - HW1260LED277R1

60W 277V 12AC Output Electronic LED Driver, Class 2 (See mounting accessories in back)

#### GLASS COLOR LENS OPTIONS:



-RED

MEDIUM (FA1133RED)



-AMBER

MEDIUM (FA1133AMBER)



-GREEN


MEDIUM (FA1133GREEN)



-BLUE

MEDIUM (FA1133BLUE)

### LIGHT DISTRIBUTION

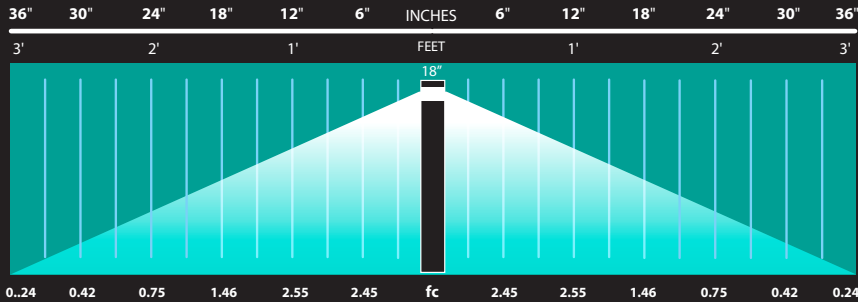

### ORDERING INFORMATION

### LAMP SHIP WEIGHT


AL08MDDMS2L24BLT	2.5" Aluminum Bollard, Deck Mount	3w LED	3.0 lbs.
AL08MDDMS2L24BRS	2.5" Brass Bollard, Deck Mount	3w LED	4.0 lbs.
AL08MDDMS2L24COP	2.5" Copper Bollard, Deck Mount	3w LED	4.0 lbs.
AL08MDS2L24BRS	2.5" Brass Bollard, Angle Cut	3w LED	5.0 lbs.
AL08MDS2L24COP	2.5" Copper Bollard, Angle Cut	3w LED	5.0 lbs.

### ACCESSORIES


FA03LG	Large Black ABS Stake, 1/2" NPS Female Thread
FA033PBLK	3 Prong Stake, Stainless Steel, 1/2" NPS Female, Black
FAJBOX	Brass Junction Box, 1/2" NPS Female on Cover
FA42FIN	Plastic Mounting Fins (Pack of 4)
FA25BLT	12V PVC Mounting Pedestal, Alum Cap, Black Texture
FA25BRS	12V PVC Mounting Pedestal, Brass Cap
FA26BLT	120V PVC Mounting Pedestal, Alum Cap, Black Texture
FA26BRS	120V PVC Mounting Pedestal, Brass Cap



### DIMENSIONAL DRAWINGS

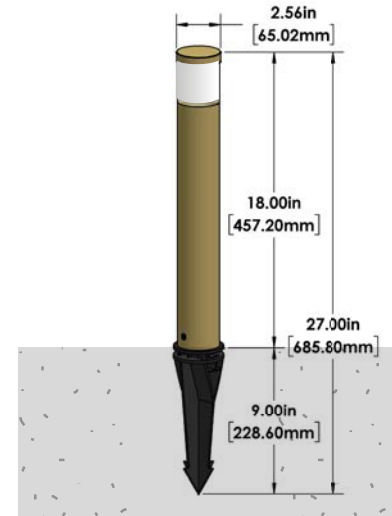

**AL08MDDMS2L24BRS (12V)**  
(SHOWN WITH FA03LG MOUNTING STAKE)

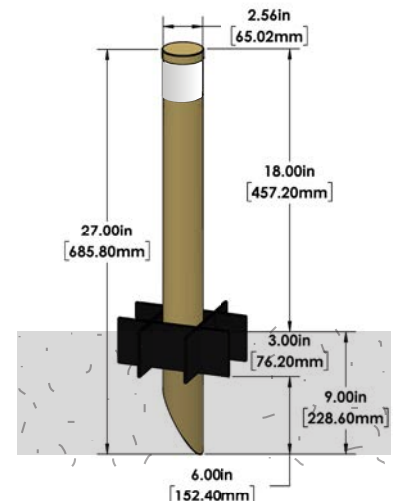

**AL08MDS2L24BRS (12V)**  
(SHOWN WITH FA42FIN STABILIZING FIN)



NEW

# AL08 SERIES **2** Bollards LARGE



Model Shown  
**AL08LGDMSS2L24BRS**



Model Shown  
**AL08LGDMSS2L24BRT**



Model Shown  
**AL08LGDMSS2L24BRWHT**



Model Shown  
**AL08LGDMSS2L24WHT**

TO PLACE ORDERS – TOLL FREE (888)882.1350  
ORDERS@FOCUSINDUSTRIES.COM

# AL08LGMS2L24BRS

LARGE

## SPECIFICATIONS

### CONSTRUCTION: 3.14" Dia. 24" Above grade

Seamless tube body made of Aluminum or Brass with matching spun cap

**LENS:** Frosted / High impact acrylic Snoot

**LED SUPPLIED:** 3W MR16 Super Saver LED 36° (L24), 3000K, 40,000 hrs

**LAMP OPTIONS:** 5w MR16 Super Saver 36° (L36) 3000K, 40,000 hrs

7W MR16 Super Saver 36° (L48), 3000K, 40,000 hrs

**SOCKET:** High temperature ceramic GU5.3 Bi-Pin with 250°C silicone lead wires

**WIRING:** Black 3 foot 18/2 zip cord from base of fixture (12V ONLY)

For 25 foot 16/2 fixture lead wire add -25F to catalog number

**CONNECTION:** FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2, or 8/2 ONLY)

**MOUNTING:** Deck Mount (-DM) U Bracket with 4 screws

Stake Mount (-S) 18" X 2.875" OD ABS Stake with 4 screws and 4 Black ABS stabilizing fins (-FA42FIN)

**FINISH:** Aluminum, or Brass unfinished

**POWDER COAT OPTIONS AVAILABLE**

\*Powder coat finishes over Brass are custom and Non-Returnable

### 120V GU10 OPTION: 120V Standard Wiring

3W GU10 Base 36° (L108), 3000K, 40,000 hrs

5W GU10 Base 36° (L116), 3000K, 40,000 hrs

7W GU10 Base 36° (L126), 3000K, 40,000 hrs

**SOCKET:** High Temperature Ceramic GU10 twist & lock base with 250° Silicone lead wires

**MOUNTING:** Deck Mount model (-DM) with ABS mounting base screws

### 277V OPTION: Use LTF LED Driver - HW1260LED277R1

60W 277V 12AC Output Electronic LED Driver, Class 2 (See mounting accessories in back)

### GLASS COLOR LENS OPTIONS:



-RED

LARGE (FA1133RED)



-AMBER

LARGE (FA1133AMBER)



-GREEN


LARGE (FA1133GREEN)



-BLUE

LARGE (FA1133BLUE)

## LIGHT DISTRIBUTION

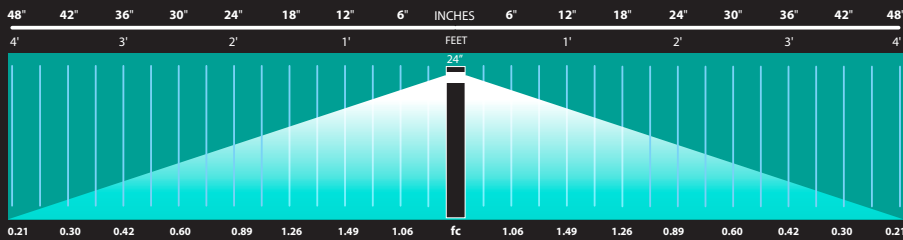

## ORDERING INFORMATION

## LAMP SHIP WEIGHT

Part Number	Description	LAMP	SHIP WEIGHT
AL08LGDMS2L24BLT	3" Aluminum Bollard, Stake Deck Mount	3w LED	4.0 lbs.
AL08LGDMS2L24BRS	3" Brass Bollard, Stake Deck Mount	3w LED	7.0 lbs.
AL08LGDMS2L24BLT	3" Aluminum Bollard, Deck Mount	3w LED	4.0 lbs.
AL08LGDMS2L24BRS	3" Brass Bollard, Deck Mount	3w LED	7.0 lbs.


## ACCESSORIES

Part Number	Description
FACPUSS	Stainless Steel U Bracket for Deck Mount 3" DIA. Posts
FA033PBLK	3 Prong Stake, Stainless Steel, 1/2" NPS Female, Black
FAJBOX	Cast Brass Junction Box, 1/2" NPS Female on Cover
FA25BLT	12V PVC Mounting Pedestal, Alum Cap, Black Texture
FA25BRS	12V PVC Mounting Pedestal, Brass Cap
FA26BLT	120V PVC Mounting Pedestal, Alum Cap, Black Texture
FA26BRS	120V PVC Mounting Pedestal, Brass Cap
FA42FIN	4 Black Stabilizing fins
FAS25	3" Dia. Black ABS 18" Stake Mount for AL08LG




AL08LGMS2L24BRS (12V)  
(SHOWN IN BRASS UNFINISHED)

## DIMENSIONAL DRAWINGS

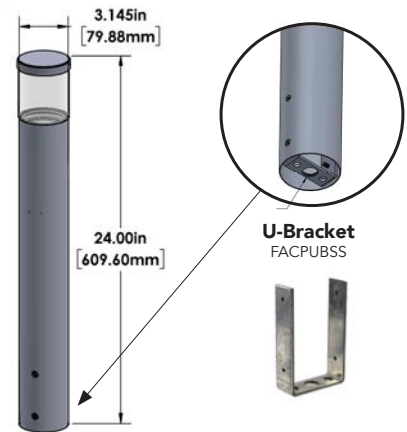

AL08LGMS2L24BRS (12V)  
(SHOWN IN FACPUSS U-BRACKET)

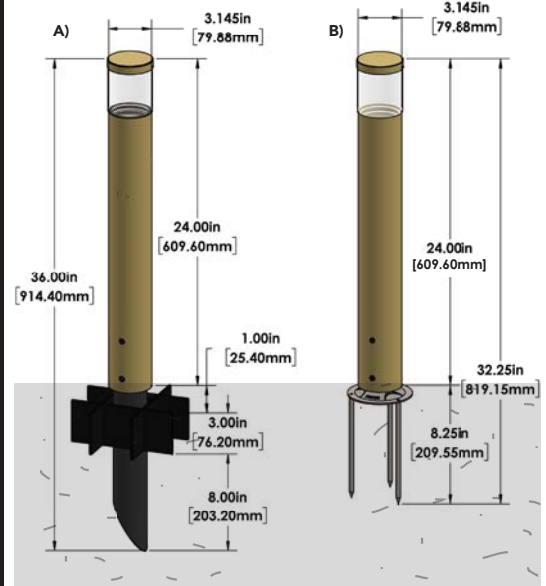

A) AL08LGDMS2L24BRS (12V)  
(SHOWN WITH FA24FIN STABILIZING FIN)

B) AL08LGDMS2L24BRS (12V)  
(SHOWN WITH FA033PBLK 3 Prong Stake)



# MOUNTING AND ACCESSORIES

## MOUNTING ACCESSORIES:

SMALL		MEDIUM		LARGE	
(SUPPLIED: FA03) STAKE MOUNT 12V	(FA032PBRZ) PRONG STAKE 12V	(SUPPLIED: FA03LG) STAKE MOUNT 12V	(FA033PBRZ) PRONG STAKE 12V	(SUPPLIED: FACPUBSS) U-BRACKET 12V - 277V	(FA033PBRZ) PRONG STAKE 12V
(FA03RXBRS) RX STAKE MOUNT 12V		(FAJBOX) JBOX 120V / 277V	(FA25/FA26BRS) MOUNTING POST 12V - 277V	(FAJBOX) JBOX 120V / 277V	(FA25/FA26BRS) MOUNTING POST 12V - 277V
(FA24BRS) CANOPY MOUNT 12V	(FA24LP3BRS) CANOPY MOUNT 12V				
(FA24MDCSTBAR) CANOPY MOUNT 12V			STAKE MOUNT USE (FA42FIN) STABILIZING FINS 12V-277V	STAKE MOUNT USE (FAS25) ABS STAKE MOUNT 12V-277V	STAKE MOUNT USE (FA42FIN) STABILIZING FINS 12V-277V

## GLASS COLOR LENS OPTIONS:

RED (-R)	AMBER (-A)	GREEN (-G)	BLUE (-B)
SMALL (FA1017RED) MEDIUM (FA1133RED) LARGE (FA1133RED)	SMALL (FA1017AMBER) MEDIUM (FA1133AMBER) LARGE (FA1133AMBER)	SMALL (FA1017GREEN) MEDIUM (FA1133GREEN) LARGE (FA1133GREEN)	SMALL (FA1017BLUE) MEDIUM (FA1133BLUE) LARGE (FA1133BLUE)

## LTF LED DRIVER - HW1260LED277R1

60W 277V 12AC Output Electronic LED Driver  
Class 2 (Fits inside junction box, or mounting post)

IP65



## FINISH OPTIONS

POWDER COAT FINISHES												BRASS & COPPER FINISHES				
BLACK SEMI GLOSS	BLACK TEXTURE	BRONZE TEXTURE	CAMEL	CHROME POWDER	HUNTER GREEN TEXTURE	RUBBED VERDE	RUST	WHITE TEXTURE	WEATHER BROWN	WEATHER IRON	WHITE STUCCO	BLACK MAGIC	DARK BRONZE	BRASS ACID RUST	BRASS ACID VERDE	BLACK ACID TREATMENT
-BLK	-BLT	-BRT	-CAM	-CPR	-HTX	-RBV	-RST	-WTX	-WBR	-WIR	-STU	-BKM	-DBZ	-BAR-CAR	-BAV-CAV	-BAT
														COPPER ACID RUST	COPPER ACID VERDE	

\* Powder Coat Finishes over Brass / Copper are custom and Non-Returnable



25301 Commercentre Drive, Lake Forest, CA. 92630  
(949) 830-1350 | (888)882-1350 | www.focusindustries.com