




SLS-05 SERIES SIGN LIGHT

TYPE

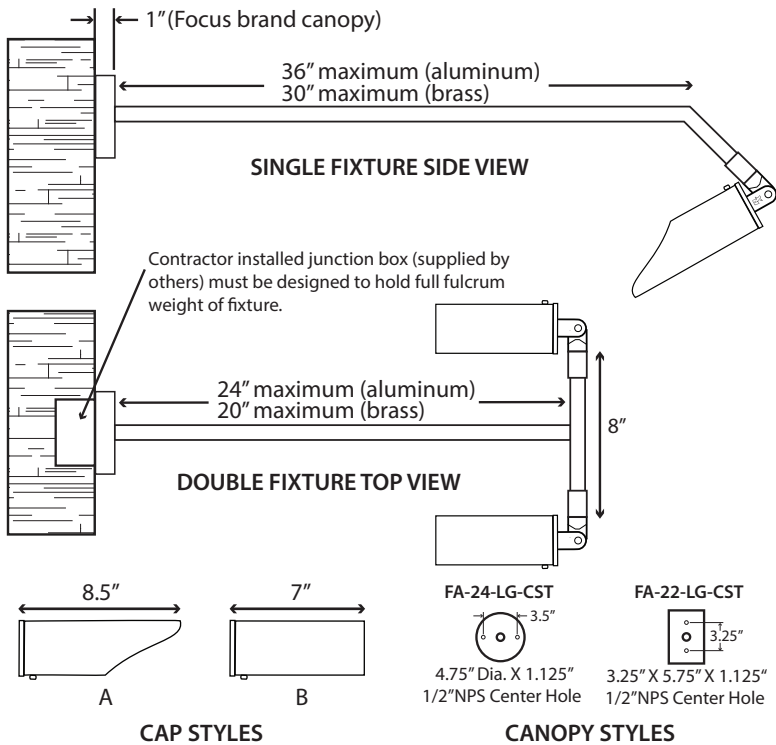

SPECIFICATIONS
 Aluminum: Extruded housing; Die cast base and canopy; adjustable die cast swivel; extruded aluminum extension pole
 Brass: Extruded housing; Die cast base and canopy; adjustable die cast swivel; extruded brass extension pole

Max Wattage:
50w

Lamp Options: PAR20 LED

Socket:
120v - High temperature brass nickle plated medium base with 150° C silicone lead wires


Wiring:
Standard 120v black, white & green

Power Supply:
120v - No transformer required

Finish: See color options in ordering information below

Note: 45° bend required for full rotation of single fixture towards wall.

IP55

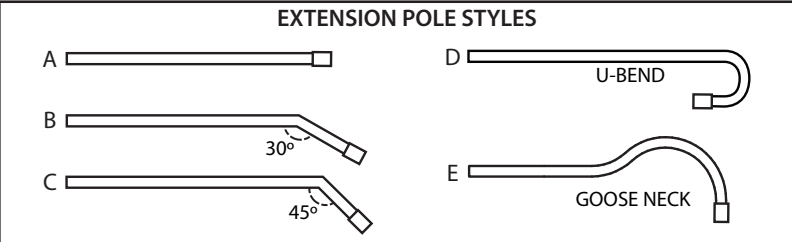

SLS-05- _____
 1 2 3 4 5 6 7 8 9 10 11

ORDERING INFORMATION

1. MATERIAL	
A: ALUMINUM RXD05	
B: BRASS RXD05	
2. FIXTURE TYPE	
1: SINGLE	
2: DOUBLE (ALUMINUM)	
3: DOUBLE (BRASS)	
3. LIGHT SOURCE	
NL: NO LAMP, MED BASE SOCKET	
1: 8W 120V PAR20 ARROW SS LED 15°	L140
2: 8W 120V PAR20 ARROW SS LED 40°	L142
4. CAP STYLE	
A: ANGLE CAP	
B: TUBE SHIELD CAP	
5. LENS TYPE	
1: CONVEX	
2: FLAT	
6. LENS ENHANCEMENT	
0: NO LENS ENHANCEMENT	
A: LINEAR SPREAD	
B: WIDE SOFTENER	
C: BLUE	
D: GREEN	
7. GLARE SHIELDING	
0: NO SHIELDING	
H: HEX CELL LOUVER	

8. EXTENSION POLE LENGTH	
12: 12 INCHES	
18: 18 INCHES	
24: 24 INCHES (MAX FOR DOUBLE)	
30: 30 INCHES (SINGLE ONLY / MAX BRS)	
36: 36 INCHES (MAX ALUM SINGLE)	
CUSTOM: (ADDER PER INCH)	
9. EXTENSION POLE STYLE	
A: STRAIGHT	
B: 30° BEND	
C: 45° BEND	
D: U BEND (PROVIDE SPEC)	
E: GOOSE NECK (PROVIDE SPEC)	
F: CUSTOM BEND (PROVIDE SPEC)	
10. CANOPY	
0: NO CANOPY (1/2" NPS REQUIRED)	
1: FA-24-LGCST ALUM ROUND	
2: FA-24-LGCST BRASS ROUND	
3: FA-22-CST ALUM RECTANGLE	
4: FA-22-CST BRASS RECTANGLE	
11. COLOR	
BLT/BRT: BLACK OR BRONZE TEXTURE (STANDARD, ALUMINUM ONLY)	
OTHER POWDER COLOR FIXTURE	
OTHER POWDER COLOR POLE	
OTHER POWDER COLOR CANOPY	
BRS: UNFINISHED BRASS (STANDARD)	
OTHER ACID TREATMENT FIXTURE	
OTHER ACID TREATMENT POLE	
OTHER ACID TREATMENT CANOPY	