




# SLS-20 SERIES SIGN LIGHT

TYPE

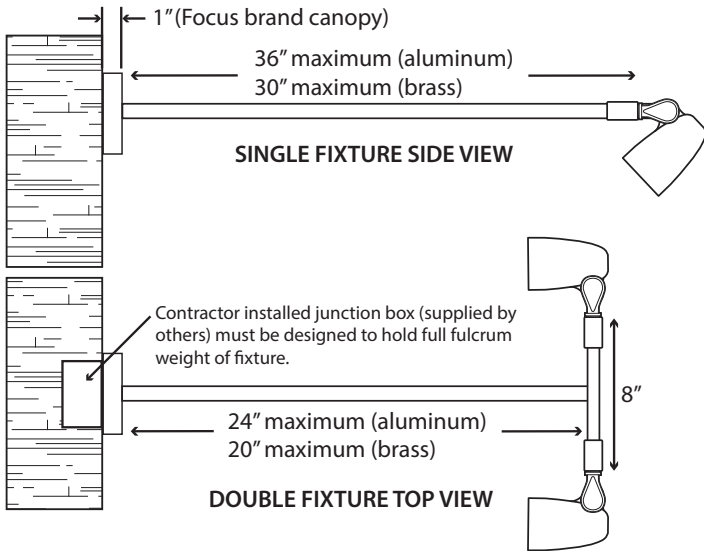

### SPECIFICATIONS

**Aluminum:** Die cast bullet and canopy; adjustable die cast swivel; extruded aluminum extension pole  
**Brass:** Die cast bullet and canopy; adjustable die cast swivel; extruded brass extension pole

**Max Wattage:** 50w (both 12v and 120v)

**Lamp Options:** PAR20 LED, MR16 LED

### Socket:

12v - High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires  
 120v - High temperature brass nickel plated medium base with 150°C silicone lead wires



### Wiring:

12v - Black 18/2 SPT-1W 8" from base of fixture  
 120v - Standard 120v black, white & green

### Power Supply:

12v - Remote 12v transformer or internal hard wire transformer (not included)  
 120v - No transformer required

**Finish:** See color options in ordering information below

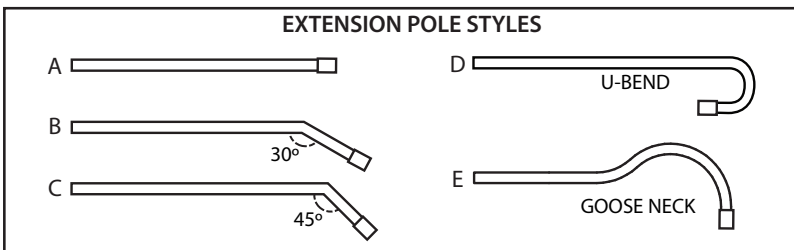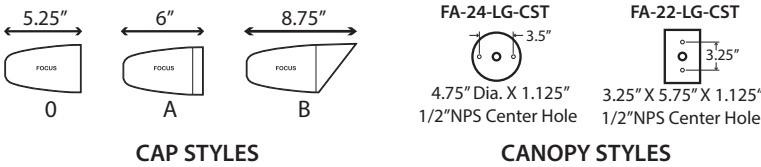

IP55 (with cap)



SLS-20- \_\_\_\_\_  
 1      2      3      4      5      6      7      8      9      10      11

ORDERING INFORMATION

1. MATERIAL		
A: ALUMINUM DL20 BI-PIN 12 VOLT		
B: ALUMINUM DL20 GU10 120 VOLT		
C: ALUMINUM DL20 MED BASE 120 VOLT		
D: BRASS DL20 BI-PIN 12 VOLT		
E: BRASS DL20 GU10 120 VOLT		
F: BRASS DL20 MED BASE 120 VOLT		
2. FIXTURE TYPE		
1: SINGLE		
2: DOUBLE (ALUMINUM)		
3: DOUBLE (BRASS)		
3. LIGHT SOURCE		
NL: NO LAMP		
1: 8W 120V PAR20 ARROW SUPER SAVER LED 15°		L140
2: 8W 120V PAR20 ARROW SUPER SAVER LED 40°		L142
3: 3W ARROW SUPER SAVER MR16 15 °		L22
4: 3W ARROW SUPER SAVER MR16 36 °		L24
5: 3W ARROW SUPER SAVER MR16 80 °		L26
6: 5W ARROW SUPER SAVER MR16 15 °		L34
7: 5W ARROW SUPER SAVER MR16 36 °		L36
8: 5W ARROW SUPER SAVER MR16 80 °		L38
9: 7W ARROW SUPER SAVER MR16 15 °		L46
10: 7W ARROW SUPER SAVER MR16 36 °		L48
11: 7W ARROW SUPER SAVER MR16 80 °		L50
12: 3W ARROW SUPER SAVER MR16 15 ° GU10		L106
13: 3W ARROW SUPER SAVER MR16 36 ° GU10		L108
14: 3W ARROW SUPER SAVER MR16 80 ° GU10		L110
15: 5W ARROW SUPER SAVER MR16 15 ° GU10		L114
16: 5W ARROW SUPER SAVER MR16 36 ° GU10		L116
17: 5W ARROW SUPER SAVER MR16 80 ° GU10		L118
18: 7W ARROW SUPER SAVER MR16 15 ° GU10		L124
19: 7W ARROW SUPER SAVER MR16 36 ° GU10		L126
20: 7W ARROW SUPER SAVER MR16 80 ° GU10		L128
4. CAP STYLE		
0: NO CAP (PAR20 OUTDOOR RATED ONLY)		
A: EXTENSION CAP		
B: ANGLE CAP		
5. LENS TYPE		
0: NO LENS (PAR20 OUTDOOR RATED ONLY)		
1: CONVEX		

6. LENS ENHANCEMENT	
0: NO LENS ENHANCEMENT	
A: LINEAR SPREAD	
B: WIDE SOFTENER	
C: BLUE	
D: GREEN	
7. GLARE SHIELDING	
0: NO SHIELDING	
H: HEX CELL LOUVER	
8. EXTENSION POLE LENGTH	
12: 12 INCHES	
18: 18 INCHES (MAX FOR DOUBLE BRS)	
24: 24 INCHES (MAX FOR DOUBLE ALUM)	
30: 30 INCHES (SINGLE ONLY / MAX BRS)	
36: 36 INCHES (SINGLE ALUM ONLY)	
CUSTOM: (ADDER PER INCH)	
9. EXTENSION POLE STYLE	
A: STRAIGHT	
B: 30° BEND	
C: 45° BEND	
D: U BEND (PROVIDE SPEC)	
E: GOOSE NECK (PROVIDE SPEC)	
F: CUSTOM BEND (PROVIDE SPEC)	
10. CANOPY	
0: NO CANOPY (1/2" NPS REQUIRED)	
1: FA-24-LGCST ALUM ROUND	
2: FA-24-LGCST BRASS ROUND	
3: FA-22-CST ALUM RECTANGLE	
4: FA-22-CST BRASS RECTANGLE	
11. COLOR	
BLT/BRT: BLACK OR BRONZE TEXTURE (STANDARD, ALUMINUM ONLY)	
OTHER POWDER COLOR      FIXTURE	
OTHER POWDER COLOR      POLE	
OTHER POWDER COLOR      CANOPY	
BRS: UNFINISHED BRASS (STANDARD)	
OTHER ACID TREATMENT      FIXTURE	
OTHER ACID TREATMENT      POLE	
OTHER ACID TREATMENT      CANOPY	