





# SLS-42 SERIES SIGN LIGHT

TYPE

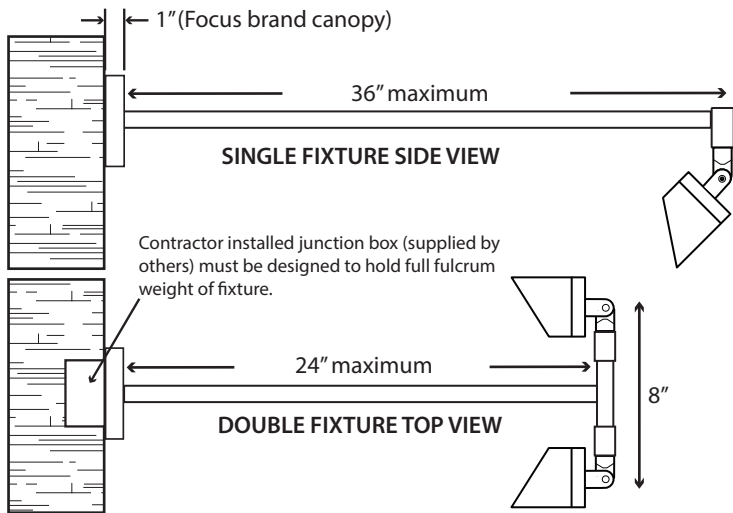


CAP STYLE



CANOPY STYLES

### EXTENSION POLE STYLES

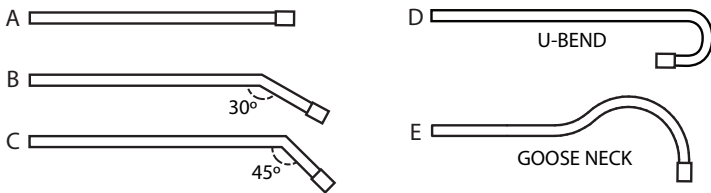

### SPECIFICATIONS

Aluminum, Brass or Copper with matching adjustable die cast 240° swivel;  
Aluminum or Brass extruded extension pole and matching canopy

**Max Wattage:** 15w

**Lamp Options:** 7w Integrated LED Module with 12v driver on board. 50,000 hour lifetime rating.

**Socket:**  
None - hard wired

**Wiring:**  
12v - Black 18/2 SPT-1W 8" from base of fixture

**Power Supply:**  
12v - Remote 12v transformer (not included)

**Finish:** See color options in ordering information below



SLS-42- \_\_\_\_\_  
1      2      3      4      5      6      7      8      9      10      11

ORDERING INFORMATION

<b>1. MATERIAL</b>
A: ALUMINUM
B: BRASS
C: COPPER (USES BRASS POLE)
<b>2. FIXTURE TYPE</b>
1: SINGLE
2: DOUBLE (ALUMINUM)
3: DOUBLE (BRASS)
<b>3. LIGHT SOURCE</b>
01: 7W LED MODULE 15° SPOT
02: 7W LED MODULE 40° FLOOD
03: 7W LED MODULE 60° WIDE FLOOD
04: 7W LED MODULE NO OPTICS
<b>4. CAP STYLE</b>
A: ANGLE CAP
<b>5. LENS TYPE</b>
1: CONVEX
<b>6. LENS ENHANCEMENT</b>
0: NO LENS ENHANCEMENT
A: WIDE SOFTENER
B: BLUE
C: GREEN
<b>7. GLARE SHIELDING</b>
0: NO SHIELDING
H: HEX CELL LOUVER

<b>8. EXTENSION POLE LENGTH</b>
12: 12 INCHES
18: 18 INCHES
24: 24 INCHES (MAX FOR DOUBLE)
30: 30 INCHES (SINGLE ONLY)
36: 36 INCHES (SINGLE ONLY, MAX)
CUSTOM: (ADDER PER INCH)
<b>9. EXTENSION POLE STYLE</b>
A: STRAIGHT
B: 30° BEND
C: 45° BEND
D: U BEND (PROVIDE SPEC)
E: GOOSE NECK (PROVIDE SPEC)
F: CUSTOM BEND (PROVIDE SPEC)
<b>10. CANOPY</b>
0: NO CANOPY (1/2" NPS REQUIRED)
1: FA-24-LGCST ALUM ROUND
2: FA-24-LGCST BRASS ROUND
3: FA-22-CST ALUM RECTANGLE
4: FA-22-CST BRASS RECTANGLE
<b>11. COLOR</b>
BLT/BRT: BLACK OR BRONZE TEXTURE (STANDARD, ALUMINUM ONLY)
OTHER POWDER COLOR FIXTURE
OTHER POWDER COLOR POLE
OTHER POWDER COLOR CANOPY
BRS/COP: UNFINISHED (STD)
OTHER ACID TREATMENT FIXTURE
OTHER ACID TREATMENT POLE
OTHER ACID TREATMENT CANOPY