




INDUSTRIAL LIGHTING

T 800.285.6780 E support@ggled.net
www.ggled.net



**DIRECT AC
DRIVERLESS**

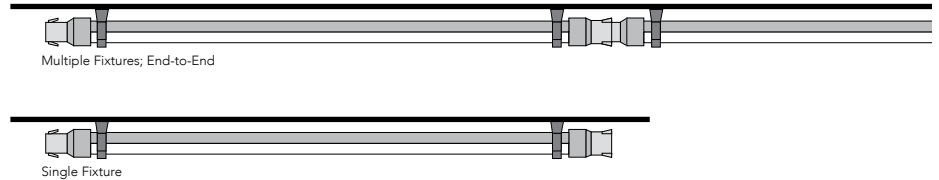

GPX INSTALLATION MANUAL PAGE 1

WARNING

Fixtures must be installed by a qualified electrician in accordance with all national and local electrical and construction codes and regulations. Please read through this document entirely before beginning the installation.

RISK OF ELECTRIC SHOCK

- Turn power off before inspection, installation or removal.
- The electrical supply for each luminaire must always be connected to the male connector.

Electrical Requirements

- Suitable for wet locations.
- Follow all National Electric Codes (NEC) and local codes.

Notes

- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
- If the external flexible cable or cord of this luminaire is damaged, it shall be replaced by a special cord or cord exclusively available from the manufacturer or his service agent.
- Ensure the end cap on the electrical plug of the last fixture in the run is in place and fully seated.

GPX INSTALLATION MANUAL PAGE 2

Supplied Materials

1




2



3



4



5




- 1 GPX Series Luminaire(s)
- 2 Leader Cable(s) for connecting fixtures to AC power source
- 3 Standard Mounting Clips (Non-Metalic Quick Latch) - Stainless steel bolt latch also available
- 4 End Cap(s) for Female Connectors to seal the end of a run
- 5 Optional Jumper Cable(s) for connecting a series of fixtures

Required Materials


Mounting Screws (depending on mounting surface)
Chalk Line (for easy, straight mounting clip placement)
Wire Stripper/Cutter
Screwdriver
Cordless Drill with Driver Bit
UL Approved 18-14 AWG Wire Connectors

GPX INSTALLATION MANUAL PAGE 3


Installation

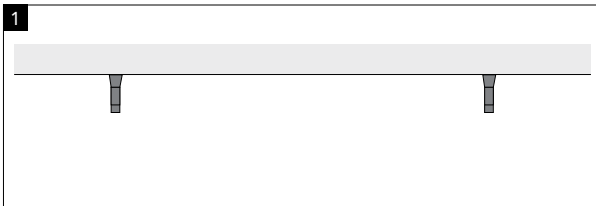


Mount each clip to the desired ceiling/wall using appropriate mounting screws for the specific surface. G&G provides and recommends (3) clips per GPX8/GPX6 and (2) per GPX4/GPX2.

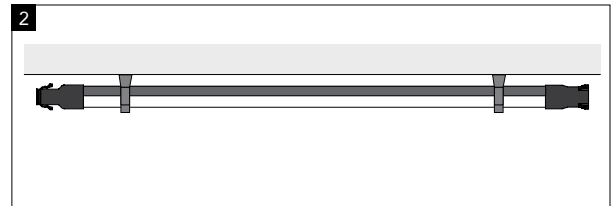


After mounting the clips, snap the fixtures into position by pressing them up into the mounting clips.

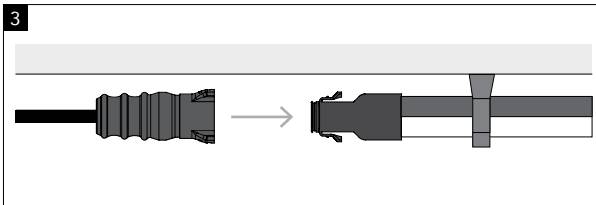


Connect the leader cable to the male plug on the first LED fixture. Two clicking noises should be heard.

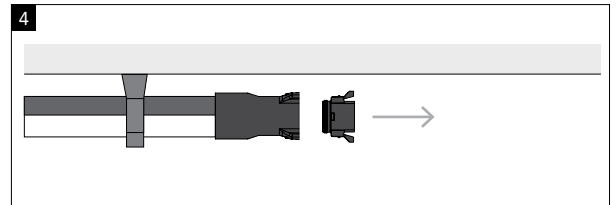

Remove endcap from other side.

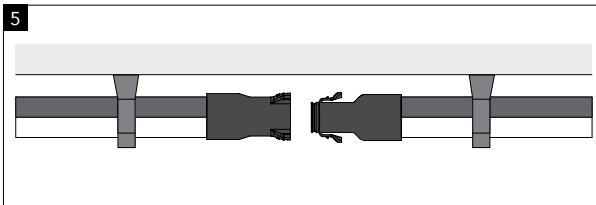


Continue placing fixtures, being sure to join plugs male to female. Attach jumper cables as needed to work around any obstacles, corners or separations.

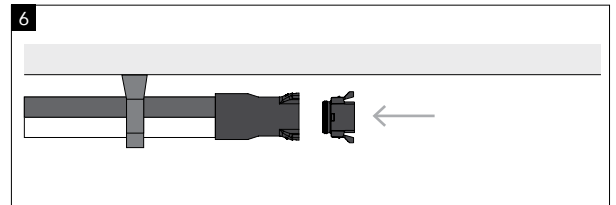


Ensure the endcap on the electrical plug of the last fixture in the run is in place and fully seated.

Electrical Connections

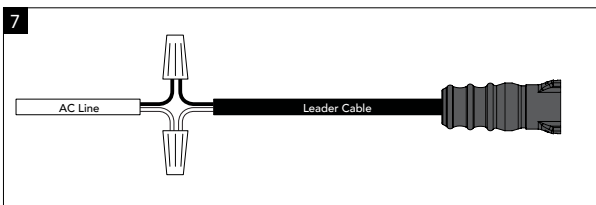

Connect the black (line) and white (neutral) wires of the AC line to the similarly colored wires of the leader cable using wire nuts.

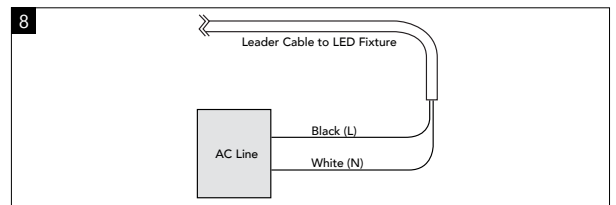

Wiring diagram. Ensure the proper input voltage is applied for the GPX product being utilized (120V or 277V)