

NEMA 1 Disconnect Switches

"Suitable as Motor Disconnects"



SHARED FEATURES

Wiring conduit knockouts.

- 1/2" and 3/4" NPT.
- Top, bottom or back wire entry points.

Surface mount control.



HBL1389D

Thermoplastic cover
on a plated steel base.

Durable, non-conductive cover.



- Circuit-Lock® NEMA type 1 enclosures are "Suitable as Disconnect" when used with the 30 Amp controller/disconnect.
- Extra wiring room facilitates termination.
- Compact size allows for strategic placement.

All aluminum cover and base.

Base is pre-drilled for rear surface mounting.

CIRCUIT-LOCK® NEMA 1 Enclosures with Switch

Order Information

Ideal for use in industrial environments, i.e. conveyer systems, industrial fans, etc.

Amp	Poles	Enclosure Material	HP Rating				Catalog Numbers
			120V AC	240V AC	480V AC	600V AC	
30	2	Thermoplastic	2	5	10	15	HBL1392D
30	3	Thermoplastic	3	7.5	15	20	HBL1389D
30	2	Aluminum	2	5	10	15	HBL1372D
30	3	Aluminum	3	7.5	15	20	HBL1379D

Note: For switch specifications refer to pages 3 and 4.



HBL1389D



HBL1379D

CIRCUIT-LOCK® NEMA 1 Enclosures without Switch

Order Information

For use with switches shown on pages 3 and 4.

Cover Material	Base Material	No. Equipment Grounds	Catalog Numbers
Thermoplastic	Steel	1	HBL1390
Aluminum	Aluminum	2	HBL1370




HBL1390




HBL1370

Dimensional Drawings

HBL1370, HBL1372D and HBL1379D

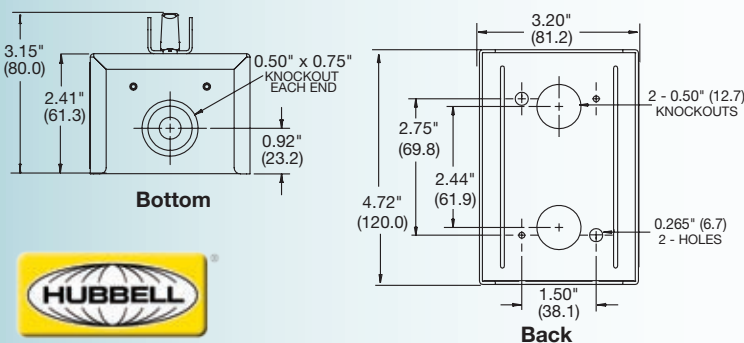

HBL1390, HBL1389D and HBL1392D

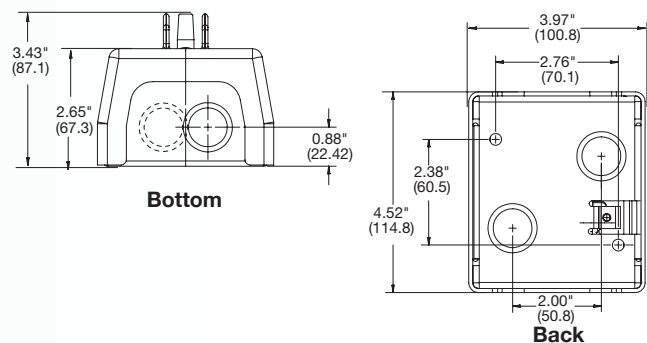




Hubbell's CIRCUIT-LOCK®










Manual Motor Controllers "Suitable as Motor Disconnects"

QUICK REFERENCE

Toggle Switches

Catalog Numbers	Amps	Description	Phase	Poles	HP			
					120	240	480	600
 HBL7810D	30	Toggle Switch	1	2	2	5	10	15
HBL7832D	30	Toggle Switch	1	2	2	5	10	15
HBL7832DS	30	Short Toggle Switch	1	2	2	5	10	15
HBL7810D	30	Toggle Switch	3	3	3	7.5	15	20
HBL7810DS	30	Short Toggle Switch	3	3	3	7.5	15	20
HBL7842D	40	Toggle Switch	1	2	2	5	10	15
HBL7843D	40	Toggle Switch	3	3	3	7.5	15	20
 HBL7853D	50	Toggle Switch	1	2	2	5	10	15
HBL7853D	50	Toggle Switch	3	3	3	7.5	15	25
HBLFG30	—	Finger guard (30-50A Switches)						
HBL7862D	60	Toggle Switch	1	2	—	10	15	20
HBL7863D	60	Toggle Switch	3	3	—	10	25	30
HBL7862FWD	60	Toggle Switch - Front Wire	1	2	—	10	15	20
HBL7863FWD	60	Toggle Switch - Front Wire	3	3	—	10	25	30
 HBL7863D	85	Toggle Switch	1	2	—	10	15	20
HBL7882D	85	Toggle Switch	1	2	—	10	15	20
HBL7883D	85	Toggle Switch	3	3	—	10	25	40

Toggle Switches in Enclosures

Catalog Numbers	Amps	Description	Phase	Poles	HP			
					120	240	480	600
 HBL1379D	30	NEMA 1 Aluminum	1	2	2	5	10	15
HBL1379D	30	NEMA 1 Aluminum	3	3	3	7.5	15	20
 HBL1392D	30	NEMA 1 Plastic	1	2	2	5	10	15
HBL1392D	30	NEMA 1 Plastic	3	3	3	7.5	15	20
 HBL13R22D	30	NEMA 3/3R Plastic	1	2	2	5	10	15
HBL13R22D	30	NEMA 3/3R Plastic	3	3	3	7.5	15	20
 HBL13R92D	30	NEMA 3R Die Cast Aluminum	1	2	2	5	10	15
HBL13R92D	30	NEMA 3R Die Cast Aluminum	3	3	3	7.5	15	20
 HBL13R89D	30	NEMA 3R Aluminum	1	2	2	5	10	15
HBL13R89D	30	NEMA 3R Aluminum	3	3	3	7.5	15	20
 HBL16R92D	60	NEMA 3R Aluminum	1	2	—	10	15	20
HBL16R92D	60	NEMA 3R Aluminum	3	3	—	10	25	30
 HBLDS3	30	NEMA 4X Non-Metallic	3	3	1	7.5	15	15
HBLDS3	60	NEMA 4X Non-Metallic	3	3	7.5	30	50	50
HBLDS10	100	NEMA 4X Non-Metallic	3	3	7.5	30	50	50
 HBL13S33D	30	NEMA 4X Stainless Steel	3	3	3	7.5	15	20
HBL16S63D	60	NEMA 4X Stainless Steel	3	3	—	10	25	30
 FDS30	30	NEMA 4X Non-Metallic Fused Disconnect	3	3	2	7.5	15	20
FDS30	60	NEMA 4X Non-Metallic Fused Disconnect	3	3	3	15	30	40

Printed In U.S.A. Specifications subject to change without notice.

© Registered trademark of Hubbell Incorporated. CIRCUIT-LOCK® is a Registered trademark of Hubbell Wiring Device-Kellems.

H5184

Hubbell Incorporated (Delaware) • 185 Plains Road • Milford, CT 06460-2420 • (203) 882-4800 • FAX (800) 255-1031

