

Wallplates 2-Gang, 1-Single Single Receptacle Wallplates

HUBBELL

Features

- Reinforcement ribs for extra strength
- High-impact, self-extinguishing nylon material
- Captive screw feature holds mounting screw in place

Ordering Information

Description	Device Color	UPC	Catalog Number
Nylon, smooth, 2-gang.	Black	883778103780	NP703BK



Listings

UL Standard 514D
UL Files #E31999, E92074
CSA Standard C22.2 No. 42.1


Specifications

Thickness	.06 in. (1.5)
Mounting Screw	Steel
Hole Diameter	2.16 in. (54.9)
Size	2-Gang
Height	4.63" (117.6)

Performance

Environmental

Appearance	Smooth
Operating Temperature	-40°C to 85°C

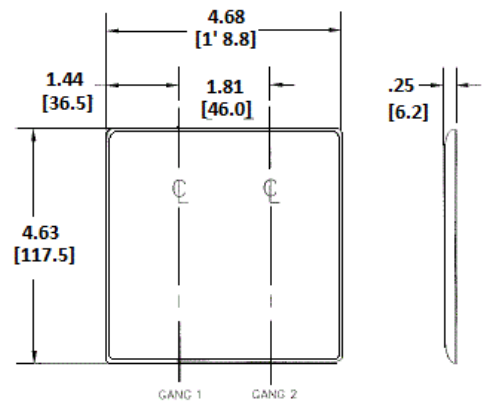

Resources

[Customer Use Drawing](#)
[eCatalog](#)

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

