



Simply Brilliant



High CRI Dimmable



Product information

FEATURES

- 1x4, 2x2, 2x4FT 125LM/W Backlit Panel
- High Lumen Efficacy
- DLC 5.1 Premium, ETL listed
- Dimmable (0-10V)
- 50,000 hour life
- High CRI 80+
- Replaces 4 x F32T8 Fixture
- No ballast required
- Polycarbonate diffuser
- Aluminum housing AL6063-T6
- Suitable for damp locations
- Quick & easy installation
- No flicker, mercury free, instant on
- 5-year warranty

APPLICATION

- Healthcare
- Offices
- Retail
- Museum
- Hospitality
- Commercial
- Lighting showroom


INSTALLATION

- Recessed
- Suspending

ADDITIONAL INFO

- White Trim
- Operating Temperature -20°C ~+45°C

DIAGRAM

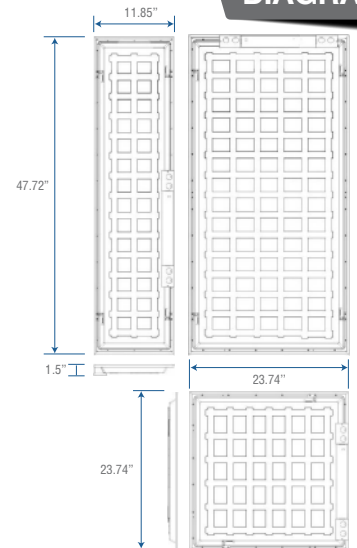

ITEM NO.	MODEL NO.	DLC ID	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	BEAM ANGLE	IP	PF	MOL (IN)	CASE QTY.
L2731-3122-BX2	ILX-BLP314-30W-MV-35K	S-M60VY1	BACKLIT 1X4 30W 35K MV 125L/W	30	120-347V	3750	3500K	120°	20	0.9	47.72x11.85x1.5	2
L2731-3123-BX2	ILX-BLP314-30W-MV-40K	S-IRFGVK	BACKLIT 1X4 30W 40K MV 125L/W	30	120-347V	3750	4000K	120°	20	0.9	47.72x11.85x1.5	2
L2731-3125-BX2	ILX-BLP314-30W-MV-50K	S-DFXIAQ	BACKLIT 1X4 30W 50K MV 125L/W	30	120-347V	3750	5000K	120°	20	0.9	47.72x11.85x1.5	2
L2731-3222-BX2	ILX-BLP322-30W-MV-35K	S-WQ065M	BACKLIT 2X2 30W 35K MV 125L/W	30	120-347V	3750	3500K	120°	20	0.9	23.74x23.74x1.5	2
L2731-3223-BX2	ILX-BLP322-30W-MV-40K	S-EHBRKF	BACKLIT 2X2 30W 40K MV 125L/W	30	120-347V	3750	4000K	120°	20	0.9	23.74x23.74x1.5	2
L2731-3225-BX2	ILX-BLP322-30W-MV-50K	S-5LDTX9	BACKLIT 2X2 30W 50K MV 125L/W	30	120-347V	3750	5000K	120°	20	0.9	23.74x23.74x1.5	2
L2731-3332-BX2	ILX-BLP324-40W-MV-35K	S-IUMRW1	BACKLIT 2X4 40W 35K MV 125L/W	40	120-347V	5000	3500K	120°	20	0.9	47.72x23.74x1.5	2
L2731-3333-BX2	ILX-BLP324-40W-MV-40K	S-7J9VQM	BACKLIT 2X4 40W 40K MV 125L/W	40	120-347V	5000	4000K	120°	20	0.9	47.72x23.74x1.5	2
L2731-3335-BX2	ILX-BLP324-40W-MV-50K	S-8POCNY	BACKLIT 2X4 40W 50K MV 125L/W	40	120-347V	5000	5000K	120°	20	0.9	47.72x23.74x1.5	2

MODEL EXAMPLE

ILX	BLP3	24	40W	MV	40K
Brand	Product Type	Size	Wattage	Voltage	CCT
illuminex	Backlit Panel Series	1=1FT 2=2FT 4=4FT	30W 40W	MV=120-347V Multi-Volt	35=3500K 40=4000K 50=5000K

ILLUMINEX TECHNOLOGIES INC.

Tel: 1-905-264-6670 Toll Free: 1-844-985-1590 Fax: 1-905-264-6671

Email: csr@illuminexled.com | Website: www.illuminexled.com

Head Office: 1-1 Keyes Court, Vaughan, ON L4H 4V6