



6" Slim Panel Downlight

The first slim panel with a 1/4" recess!



FEATURES

6" 12W 1000lm

Type IC rated (direct contact with insulation)

Energy Star, cETLus listed

- Dimmable
- 50,000 hour life
- 12W replaces 75W halogen
- Air-tight aluminum housing with PMMA lampshade in white finish
- Glare-free polycarbonate diffused lens
- Suitable for damp locations
- Quick & easy installation
- No flicker, mercury free, instant on
- 5-year warranty

APPLICATION

- Offices
- Retail
- Museum
- Hospitality
- Commercial
- Lighting showroom



INSTALLATION

- Recessed
- Insulated/drop ceilings
- Fits under studs and in narrow plenums

ADDITIONAL INFO

- White/Black/Silver Avail.
- Operating Temperature -25°C ~+40°C

DIAGRAM

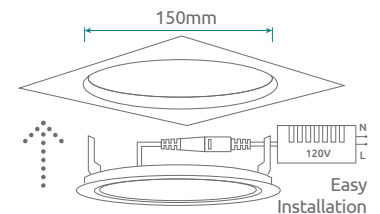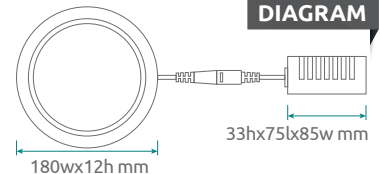

ORDER CODE	ENERGY STAR LISTING CODE	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	LIFE HRS	BEAM ANGLE	CRI	IP	PF	MOL (MM)	MOUNT SIZE	CASE QTY.
L3506-121R	YG - YGCL-15X-ETL(3000K)	ILLX SLMP 6"R 12W 3K WH cE	12	120 V	1000	3000	50,000	180°	80+	44	0.98	180	150	40
L3506-122R	YG - YGCL-15X-ETL(4000K)	ILLX SLMP 6"R 12W 4K WH cE	12	120 V	1000	4000	50,000	180°	80+	44	0.98	180	150	40
L3506-123R	YG - YGCL-15X-ETL(5000K)	ILLX SLMP 6"R 12W 5K WH cE	12	120 V	1000	5000	50,000	180°	80+	44	0.98	180	150	40

Also available in 6000K Non-Energy Star

Distributed by



Toronto | Calgary | Halifax

Tel: 1-905-264-1125 Toll Free: 1-800-361-7820 Fax: 1-905-264-1175

Email: information@interadwes.com | Website: www.interadwes.com

Head Office: 1-180 New Huntington Road, Vaughan, ON L4H 0P5